

VAPolyFM

Modular FM Synthesizer



User Guide

Version 2.0

Table of Contents

Introduction	15
Privacy Settings	15
Main Features	15
System Requirements	15
Use as Stand Alone	16
Use as AudioUnit Extension (AUv3)	16
Factory Preset	16
User Preset	16
State Recovery	16
About MIDI Latency	16
Maximum Number of Touches	16
User Interface	17
Tool Bar	19
Controller	21
Global	21
Operator 1...8	21
Effect Send	22
ARP (Arpeggio)	23
Global	24
Operators 1...8	24
Operator Routing	24
PEG (Pitch Envelope Generator)	25
EG (Envelope Generator)	25
Key Tracking	25
Low Pass Filter	26
High Pass Filter	26
VCA	26
EG1	27
EG2	27

Options	27
LFO1	28
LFO2 (Poly)	28
Step Sequencer	29
Sample & Hold	31
Mod Envelope	31
Delay	32
Chorus / Flanger	32
Reverb	32
EQ and Mixer	33
Compressor and Main Output	33
Master Output	33
Chorus / Flanger	34
Reverb	34
Mixer	34
Compressor	34
KBD Control Routing	36
Keyboard	37
Visualizer	38
Sequencer	40
Clip Editor	41
Piano Roll Editor	42
Parameter Automation Editor	43
Synthesizer	44
Block diagram	44
Control Signal & MIDI Flow	45
Operator	46
Frequency Mode	46
Fine	46
Detune	46

Spectral Form	46
Spectral Range	46
Spectral Width	46
Spectral Resonance	46
PEG Delay	46
EG Delay	46
FM Depth	46
FM LFO 1/2	46
AM Depth	47
AM LFO 1/2	47
EG Key Follow	47
EG Velocity	47
OP Switch	47
Coarse	47
Level	47
PEG T1...T4	47
PEG L1...L4	47
EG T1...T4	47
EG L1...L4	47
Break Point	48
Left Depth	48
Left Curve	48
Right Depth	48
Right Curve	48
Min	48
Max	48
Diagram	48
Routing	48
Five Stage Envelope Generator	49
Key Tracking	49

Global	50
Transpose	50
Master Tune	50
Glide Time	50
Unison	50
Voices	50
Stereo Width	50
Pattern	50
Rate	50
Switch	50
Tempo Sync	50
Volume	51
Feedback	51
Key Sync	51
Delay Send	51
Delay Pre/Post	51
C/F Send	51
C/F Pre/Post	51
Reverb Send	51
Reverb Pre/Post	51
Low Pass Filter	52
Cutoff	52
Resonance	52
Mod Amount	52
Env 1/2	52
LFO 1/2	52
Key Follow	52
LPF Slope	52
High Pass Filter	53
Cutoff	53

Resonance	53
Mod Amount	53
Env 1/2	53
LFO 1/2	53
Key Follow	53
VCA (Amplifier)	54
Volume	54
PAN	54
AM	54
Env	54
AM LFO	54
Pan LFO	54
ADSR (Envelope Generator)	55
Attack	55
Decay	55
Sustain	55
Release	55
Velocity	55
Key Follow	55
Delay	55
LFO	56
Tune	56
Shape	56
Delay	56
Tempo Sync	56
Key Sync (Key Re-Trigger)	56
AM Env	56
Env Mod	56
Output Mixer	57
Delay Level	57

C/F Level	57
Reverb Level	57
Master Output	58
Volume	58
Pan	58
Mute	58
Step Sequencer	59
Step Switch	59
Gate	59
CV	59
Stop/Play	60
Rate	60
Tempo Sync	60
Note Switch	60
Quantize	60
Root Key	60
Octave Range	60
Sequence Tab	60
Steps	60
Mod Amount	60
Mode	60
S&H (Sample and Hold) Tab	61
LFO Amount (Sample Source Mixer)	61
Noise Amount (Sample Source Mixer)	61
Hold	61
Mod Attack	61
Mod Release	61
KBD Control Routing	62
Effects	63
Delay	63

Signal Flow	63
Delay Time	63
Regeneration	63
Modulation	63
Chorus / Flanger	64
Signal Flow	64
Input Signal Level	64
Effect Type	64
Modulation Speed	64
Modulation Width	64
LFO Shape	64
Stereo Width	64
Regeneration	64
Filters	65
Reverb	66
Signal Flow	66
Input Filter	66
Pre Delay	66
Modulation Speed	66
Modulation Width	66
Size and Decay	66
Damping	66
Output Filter	66
Early / Late Mix	67
Equalizer	68
Low Shelving	68
Mid Peak / Notch	68
High Shelving	68
Compressor	69
Overview	69

Threshold and Ratio	69
Attack and Release	70
Side Chain High Pass Filter	72
Makeup Gain	72
Gain Reduction Meter	72
Input Gain	72
Dry / Wet	72
Peak Limiter	73
Keyboard	74
Select Keyboard	74
Select Key Range	74
Use Modulation Wheel	74
Use Pitch Wheel	74
Set Velocity	75
Use Key Hold	75
Show Double Keyboard	75
Select Per Note Control Targets	75
Scroll Keyboard	75
Ribbon Controller	76
Assignable Controllers	76
Sequencer	77
Clip Editor	78
Load Clip	78
Play/Stop Clip	78
Edit Piano Roll	78
Add edit button	78
Set Loop Mode	78
Auto Select Editor	78
Piano Roll Editor	79
Select Time Range and Loop Length	79

Select Note Range	79
Add Note	79
Delete Note	79
Scale Menu	79
Edit Menu	79
Chromatic Scale	80
Heptatonic Scale	80
Root Key	80
Set Length	81
Quantize	81
Set Velocity	81
Copy	81
Paste	81
Delete	81
Velocity Editor	82
Parameter Automation Editor	83
Play Sequence	84
1. Set host sync	84
2. Set tempo	84
3. Set loop	84
4. Set swing	84
5. Set metronome switch	85
6. Play	85
Record Sequence	85
1. Set recording mode	85
2. Play sequence	85
3. Record notes	85
4. Record parameters automation	85
5. Stop recording	85
Preset	86

File Menu	86
New...	86
Open...	86
Save	86
Preset Browser	87
Load Factory Preset	87
Load User Preset	87
Delete User Preset	87
Save User Preset	87
Backup/Restore User Presets stored in the device	87
Close File Browser	88
Setting Panel	89
General	89
Full Screen	89
Open User Guide	89
Open Host Setting	89
Version	89
Operator Anti-Aliasing	89
Operator HiFi	89
Color	89
MIDI Global	90
MIDI Thru	90
MIDI Monitor	90
Musical Typing	90
All Notes Off	90
Map MIDI CC	90
Reset MIDI CC Map	90
MIDI Synth 1 & 2	91
OMNI	91
Input	91

Output	91
MIDI Local	91
MIDI Send	91
MIDI Receive	91
Sustain Pedal	91
Min	91
Max	91
Stand Alone Setting	92
AbletonLink	92
Ableton Link	92
In-app notification	92
Sync Start/Stop	92
Connected Apps	92
Export Audio	93
Save As	93
Location	93
Length (Bars)	93
File Type	93
Sample Rate	93
Bit Depth	93
Export	93
Cancel	93
General	94
Run in Background	94
Resume Headphone Removed	94
Hardware Latency	94
Frame Size	94
MIDI	95
Input	95
Output	95

Bluetooth (BLE) MIDI	96
Central	96
Peripheral	96
Export Audio	97
Prepare for exporting audio	97
1. Stop playback	97
2. Select the first clip to play	97
3. Turn off metronome	97
Adjust export settings	97
1. Save As	97
2. Length	97
3. Location	97
4. File Type	97
5. Sample Rate	97
6. Bit Depth	97
Export Audio File	97
Map MIDI CC	98
MIDI Program Change	98
Use External MIDI Keyboard with Stand Alone	99
Use MIDI Foot Pedal	99
Undo / Redo	100
macOS	101
Menu Bar	101
Application	101
File	101
Edit	102
View	102
Export	102
Window	103
Help	103

Preference	104
Enable Help Section	104
Disable State Recovery	104
Touch Bar (MacBook Pro)	105
1. Play / Stop	105
2. Tempo	105
Use Computer Keyboard as MIDI Keyboard	106
Keyboard Shortcut	107
AUv3 on Apple Garage Band (Mac)	108
Load Plug-in	108
Activate Plug-In	110
Offline Renering	110
Known Limitations	110
AUv3 on Apple Garage Band (iOS)	111
Load Plug-in	111
Change Plug-in Window Size	112
Record Notes	113
Edit Notes	113
Save Project	114
Host Sync	114
System Interruptions (iOS)	115
Specification	116
Release Notes	120
What's new in version 2.0	120
What's new in version 2.0.1	120

Introduction

Thank you for purchasing VAPolyFM. To help you get the most out of this product, please read this manual carefully.


VAPolyFM V2 is modular FM synthesizer inspired by modern FM Synthesizers. V2 features 8 operators, 4 oscillator spectral form and pitch EG per operators.

VAPolyFM operates as a stand alone or as an AudioUnit Extension (AUv3) for iPhone, iPad and Mac. Stand Alone supports Ableton Link, MIDI and audio file export.

Built-in Effects include delay, chorus, flanger, reverb, eq and compressor. Project files can be saved in iCloud Drive, so that the project can be accessed from iPhone, iPad or Mac.

Privacy Settings

VAPolyFM uses local area network to connect Ableton Link enable devices and it uses bluetooth to connect with bluetooth MIDI keyboard and controllers. When dialogue appears to confirm use of the local network or the bluetooth, tap OK to give a permission to use them. These settings can be edited in Privacy section of the Setting App.

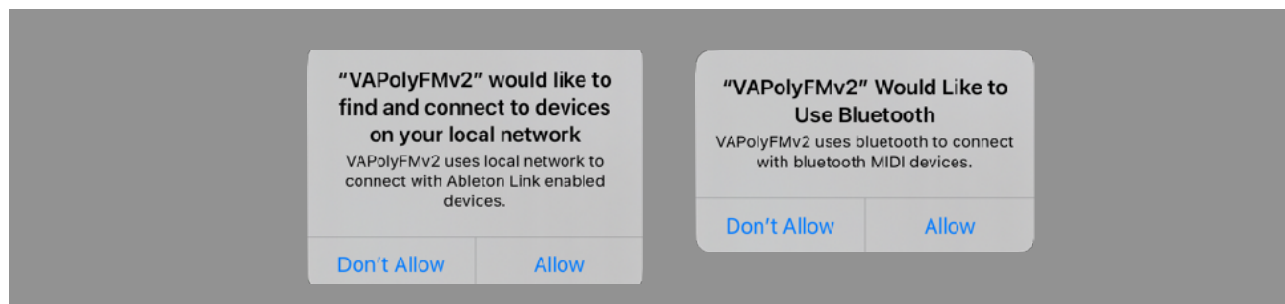

Main Features

- 8 Operator Modular FM Synthesizer.
- 4 Oscillator Spectral Form.
- Pitch EG per Operators.
- Modular Operator Routing.
- Eight Assignable Controllers with Global Offset Parameters for Performance.
- Analog Style Step Sequencer.
- Maximum 8 voice polyphony. it depends on performance of the device it is running.
- Built-in effects and piano roll sequencer.
- Audio Export. Linear PCM format (AIFF, WAV and CAF) and compressed format (AAC)
- Support Audio Unit Extension (AUv3).
- Support MIDI 2.0. Support Foot Pedal and Per Note Control.
- Support Ableton Link, Bluetooth MIDI, MIDI In / Out.
- Works on iPhone, iPad and Mac. Support iCloud Drive to share project files between the platforms.

System Requirements

- iOS 17.0 or later
- macOS 14.0 or later
- Devices with Apple Silicon are recommended. A13 Fusion or above is highly recommended. If sound is distorted when using a device with less CPU power, reduce number of voices.
- AudioUnit Extension (AUv3) requires host application which support AudioUnit Extension.

AudioUnit Extension is supported by Apple Logic and Apple Garage Band on iOS and macOS. For any other DAW, it depends on the application and some of them don't support AudioUnit Extension.

Use as Stand Alone

Stand Alone mode features Audio Export, Ableton Link, MIDI input / output and bluetooth MIDI. Sequencer can be synced with Ableton Link enabled devices and softwares.

Use as AudioUnit Extension (AUv3)

VAPolyFM supports AudioUnit Extensions. VAPolyFM works with host applications which support AUv3 plug-ins. By enabling host sync mode, VAPolyFM can be synced with tempo and transport state of the host application. VAPolyFM can send and receive MIDI message to/from the host, if the host supports midi in/out of AUv3.

Factory Preset

Factory presets contains only values of parameters of the synth and the effects. It doesn't contain any sequence data. When loading the preset, it will change the value of the parameters but sequence data remains the same.

User Preset

User Preset contains values of the synth parameters and the sequence data. When loading a user preset, value of the synth parameters and the sequence data are both changed.

User Presets can be saved in iCloud Drive or in AUv3 plug-in. User Presets in iCloud Drive can be accessed from iPhone, iPad or Mac. AUv3 Plug-In Preset is stored on the device and saved preset can be accessed from any host application which support AUv3 User Preset.

State Recovery

When VAPolyFM is used as a stand alone, it stores state of the app when the app is terminated. Stored data is recovered when it is launched at the next time. macOS version can disable this feature. The state is stored locally on the device.

About MIDI Latency

Sending or receiving MIDI notes and messages to Software Applications introduces a latency. If you have a problem of latency and DAW or host application has channel delay, adjust the delay time to compensate the latency.

Maximum Number of Touches

Maximum number of touches are varied on devices. Number of notes simultaneously playing on built-in-keyboard are limited to the maximum number of touches.

- * Apple, Mac and GarageBand are trademarks of Apple Inc., registered in the U.S. and other countries.
- * Ableton and Link are trademarks of Ableton AG.
- * All products, companies and standard names are trademarks or registered trademarks of their respective holders.



User Interface



macOS



Tool Bar

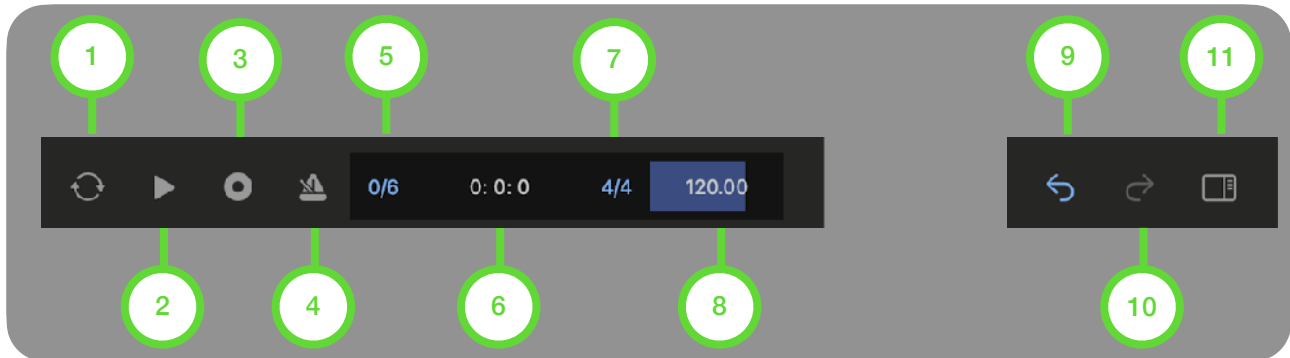

1. Host Sync

Tap this button to enable / disable host sync. When host sync is enabled, tempo and transport is controlled by the host application.

2. Play/Stop

Tap this button to play / stop the sequencer.

3. Record

Tap this button to enable / disable recording mode.

4. Metronome

Tap this button to enable / disable metronome.

5. Swing

Tap this button to show Swing menu.



6. Beat Counter

Indicates current beat time as a format of bar, beat, and sixteenth.

7. Time Signature

Tap this button to show Time Signature menu.



8. Tempo

Adjust BPM (Beat Per Minutes).


9. Undo

10. Redo

Tap the button to undo / redo.

11. Setting Panel

Tap this button to open setting panel.

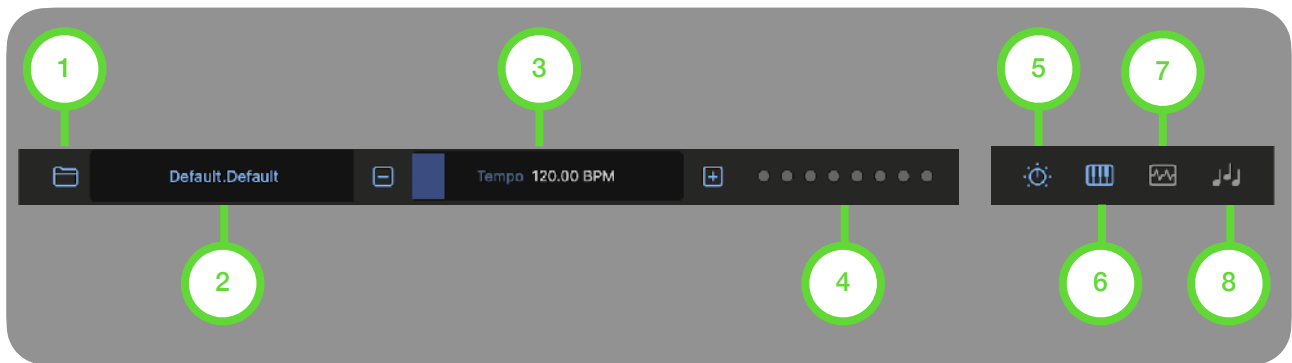

1. File
Tap this button to show file menu.




2. Preset
Indicates name of the selected preset. Tap this button to show preset browser.


3. Parameter
Indicates name and value of the selected parameter. Use plus button, minus button and slider to adjust the value. Double tap to enable menu and tap on the name to show parameter list.

4. Voice Indicator
Indicates active voices of Synth 1

5. Synth
Tap this button to show synth menu.

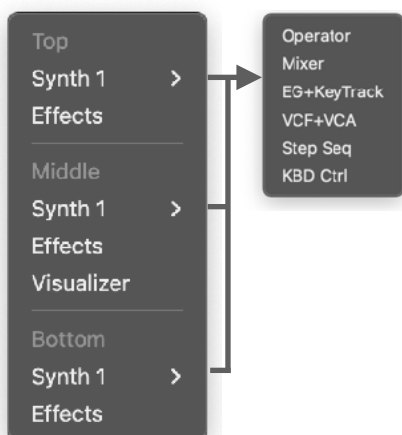


6. Keyboard
Tap this button to show keyboard. Hold this button (right click on macOS) to show keyboard menu.

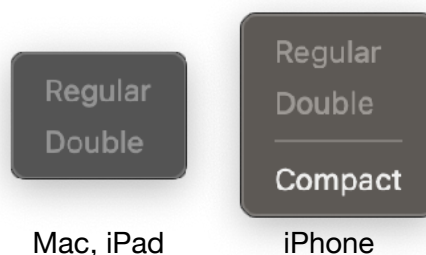


Mac, iPad

iPhone

7. Visualizer
Tap this button to show audio visualization tool. Hold this button (right click on macOS) to show visualizer menu.




8. Sequencer
Tap this button to show sequencer. Hold this button (right click on macOS) to show sequencer menu.



* Content of the menu is dependent on the platform.

Controller

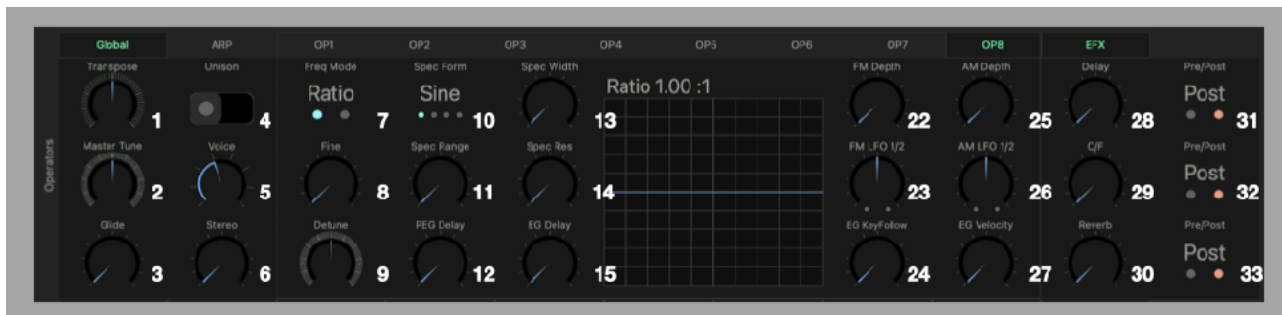

Global

1. Transpose

Adjust tuning in semi tones.

2. Master Tune

Adjust tuning in cents.

3. Glide

Adjust glide (portamento) time.

Adjust stereo width.

4. Unison Switch

Enable/Disable unison mode.

5. Number of Voices

Adjust number of voices.

6. Stereo Width

Operator 1...8

7. Frequency Mode

Select frequency mode. Options are Ratio and Fixed.

8. Fine

Adjust fine tuning of Ratio or Fixed Frequency.

9. Detune

Adjust amount of detune in cents.

10. Spectral Form

Select spectral form. Options are Sine, All, Odd and Resonance.

11. Spectral Range

Adjust spectral range for All, Odd or Resonance.

13. Spectral Width

Adjust spectral width for All, Odd or Resonance

14. Spectral Resonance

Adjust spectral resonance for Resonance.

12. PEG Delay

Adjust delay time for PEG (Pitch Envelope Generator).

15. EG Delay

Adjust delay time for EG (Envelope Generator).

22. FM Depth

Adjust master amount of frequency modulation. (Exponential)

23. FM LFO 1/2

Adjust amount of LFO1/LFO2 for Frequency Modulation. Turn the dial counter clockwise to increase amount of LFO1. Turn the dial clockwise to increase amount of LFO2.

25. AM Depth

Adjust master amount of amplitude modulation.

26. AM LFO 1/2

Adjust amount of LFO1/LFO2 for Amplitude Modulation. Turn the dial counter clockwise to increase amount of LFO1. Turn the dial clockwise to increase amount of LFO2.

24. EG KeyFollow

Adjust amount of Key Follow for envelope.

27. EG Velocity

Adjust amount of velocity to affect level of envelope.

Effect Send

28. Delay Send

Adjust level of delay send.

29. Chorus/Flanger Send

Adjust level of Chorus/Flanger send.

30. Reverb Send

Adjust level of Reverb send.

31. Delay Pre/Post

Select pre/post of Delay send.


32. Chorus/Flanger Pre/Post

Select pre/post of Chorus/Flanger send.

33. Reverb Pre/Post

Select pre/post of Reverb send.

“Pre” means pre fader. Signal is taken before volume level is applied to the signal. “Post” means post fader. Signal is taken after volume level is applied to the signal.

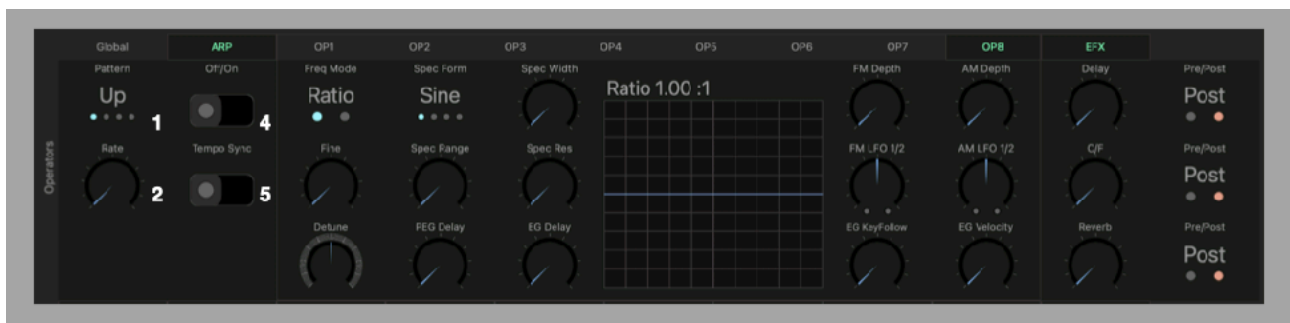

ARP (Arpeggio)

1. Pattern

Select ARP pattern.

2. Rate

Adjust frequency of ARP clock.

3. Off/On

Turn ARP on or off.

4. Tempo Sync

Enable/Disable tempo sync.



Global

1. Volume

Adjust decibel scale output level of Operator Mixer.

Adjust decibel scale amount of feedback for selected operator(s).

2. Feedback

3. Key Sync

Enable/Disable key sync for operators.

Operators 1...8

4. Switch

Turn on/off the operator.

6. Level

Adjust decibel scale level of operator.

5. Coarse

Adjust amount of coarse tuning for Ratio or Fixed Frequency.

(description of 7 ... 27 are omitted.)

Operator Routing

28. Diagram

Select this tab to show operator routing diagram.

29. Routing

Select this tab to show operator routing editor.



PEG (Pitch Envelope Generator)

1. PEG T1

Adjust time for stage 1. (Attack)

2. PEG L1

Adjust pitch of stage 1.

3. PEG T2

Adjust time for stage 2. (Decay 1)

4. PEG L2

Adjust pitch of stage 2.

5. PEG T3

Adjust time for stage 3. (Decay 2)

6. PEG L3

Adjust pitch of stage 3.

7. PEG T4

Adjust time for stage 4. (Release)

8.

PEG L4

Adjust pitch of stage 4.

EG (Envelope Generator)

1. EG T1

Adjust time for stage 1. (Attack)

2. EG L1

Adjust decibel scale level of stage 1.

3. EG T2

Adjust time for stage 2. (Decay 1)

4. EG L2

Adjust decibel scale level of stage 2.

5. EG T3

Adjust time for stage 3. (Decay 2)

6. EG L3

Adjust decibel scale level of stage 3.

7. EG T4

Adjust time for stage 4. (Release)

8. EG L4

Adjust decibel scale level of stage 4.

Key Tracking

13. Break Point

Adjust break point.

14. Left Depth

Adjust amount of left curve.

15. Left Curve

Select left curve. Options are -Lin, -Exp, +Lin and +Exp.

16. Right Depth

Adjust amount of right curve.

17. Right Curve

Select right curve. Options are -Lin, -Exp, +Lin and +Exp.

19. Min

Adjust minimum note value. Level of Notes below the min are turned off.

20. Max

Adjust maximum note value for Key Tracking. Level of Notes above the max are turned off.



Low Pass Filter

1. Cutoff

Adjust cutoff frequency of the filter.

2. Mod Amount

Adjust master amount of cutoff frequency modulation.

3. Key Follow

Adjust amount of key follow. When it is 100%, cutoff frequency is equals to note frequency.

4. Resonance

Adjust amount of resonance.

5. Env 1/2

Adjust amount of Env1/Env2 for cutoff modulation. Turn the dial counter clockwise to increase amount of Env1. Turn the dial clockwise to increase amount of Env2.

6. LFO 1/2

Adjust amount of LFO1/LFO2 for cutoff modulation. Turn the dial counter clockwise to increase amount of LFO1. Turn the dial clockwise to increase amount of LFO2.

High Pass Filter

7. Cutoff

Adjust cutoff frequency of the filter.

8. Mod Amount

Adjust master amount of cutoff frequency modulation.

9. Key Follow

Adjust amount of key follow. When it is 100%, cutoff frequency is equals to note frequency.

10. Resonance

Adjust amount of resonance.

11. Env 1/2

Adjust amount of Env1/Env2 for cutoff modulation. Turn the dial counter clockwise to increase amount of Env1. Turn the dial clockwise to increase amount of Env2.

12. LFO 1/2

Adjust amount of LFO1/LFO2 for cutoff modulation. Turn the dial counter clockwise to increase amount of LFO1. Turn the dial clockwise to increase amount of LFO2.

VCA

13. Volume

Adjust volume of VCA output.

14. Pan

Adjust position of pan or amount of pan modulation.

15. AM

Adjust amount of amplitude modulation.

16. Env

Select an envelope for the amplifier, Gate, Env1 or Env2.

17. Pan LFO

Adjust amount of LFO 1/LFO2 for Pan Modulation. Turn the dial counter clockwise to increase amount of LFO1. Turn the dial clockwise to increase amount of LFO2. When dial is in center position, pan can be adjusted manually.

18. AM LFO

Adjust amount of LFO1/LFO2 for Amplitude Modulation. Turn the dial counter clockwise to increase amount of LFO1. Turn the dial clockwise to increase amount of LFO2.

EG1

19. Attack

Adjust attack time of the envelope.

20. Decay

Adjust decay time of the envelope.

21. Velocity

Adjust amount of velocity to control the level of envelope.

22. Sustain

Adjust sustain level of the envelope.

23. Release

Adjust release time of the envelope.

24. Key Follow

Adjust amount of key follow. Duration of each stages is decreased when higher note is played.

EG2

25. Attack

Adjust attack time of the envelope.

26. Decay

Adjust decay time of the envelope.

27. Velocity

Adjust amount of velocity to control the level of envelope.

28. Sustain

Adjust sustain level of the envelope.

29. Release

Adjust release time of the envelope.

30. Key Follow

Adjust amount of key follow. Duration of each stages is decreased when higher note is played.

Options

31. LFO Slope

Select slope of the filter, -12dB Per Octave or -24 dB Per Octave.

32. EG1 Delay

Adjust delay time to trigger the envelope.

33. EG2 Delay

Adjust delay time to trigger the envelope.



LFO1

19. Tune

Adjust pitch of the low frequency oscillator.

20. Shape

Select shape of the low frequency oscillator waveform.

21. Delay

Adjust delay time to start the low frequency oscillator.

22. Tempo Sync

Turn it on to enable Tempo Sync.

23. Key Sync

Turn it on to enable Key Sync.

24. AM Env

Select an envelope for Amplitude Modulation, Off, Env1 or Env2.

LFO2 (Poly)

25. Tune

Adjust pitch of the low frequency oscillator.

26. Shape

Select shape of the low frequency oscillator waveform.

27. Delay

Adjust delay time to start the low frequency oscillator.

28. Tempo Sync

Turn it on to enable Tempo Sync.

29. Key Sync

Turn it on to enable Key Sync.

30. AM/FM Env

Select an envelope modulation, Off, AM by Env1, AM by Env2, FM by ENV1 and FM by Env2.



Step Sequencer

1. Step1 Switch

Turn it on to enable the step

Adjust Amount of CV signal (Pitch) for the step.

2. Gate1

Adjust amount of Gate signal (Velocity) for the step.

13. Step5 Switch

Turn it on to enable the step

3. CV1

Adjust Amount of CV signal (Pitch) for the step.

14. Gate5

Adjust amount of Gate signal (Velocity) for the step.

4. Step2 Switch

Turn it on to enable the step

15. CV5

Adjust Amount of CV signal (Pitch) for the step.

5. Gate2

Adjust amount of Gate signal (Velocity) for the step.

16. Step6 Switch

Turn it on to enable the step

6. CV2

Adjust Amount of CV signal (Pitch) for the step.

17. Gate6

Adjust amount of Gate signal (Velocity) for the step.

7. Step3 Switch

Turn it on to enable the step

18. CV6

Adjust Amount of CV signal (Pitch) for the step.

8. Gate3

Adjust amount of Gate signal (Velocity) for the step.

19. Step7 Switch

Turn it on to enable the step

9. CV3

Adjust Amount of CV signal (Pitch) for the step.

20. Gate7

Adjust amount of Gate signal (Velocity) for the step.

10. Step4 Switch

Turn it on to enable the step

21. CV7

Adjust Amount of CV signal (Pitch) for the step.

11. Gate4

Adjust amount of Gate signal (Velocity) for the step.

22. Step8 Switch

Turn it on to enable the step

12. CV4

23. Gate8

Adjust amount of Gate signal (Velocity) for the step.

24. CV8

Adjust Amount of CV signal (Pitch) for the step.

25. Stop/Play

Turn it on to enable sequencer for playing.
Tap any key on keyboard to start sequencer.

26. Rate

Adjust frequency of clock to drive the sequencer.

27. Tempo Sync

Turn it on to enable Tempo Sync.

28. Quantize

Select a quantize option, Off, Minor or Major.

29. Root Key

Select a Root Key. Turn it to the maximum position to enable manual mode.

30. Octave Range

Select an Octave Range

31. Steps

Select number of steps

32. Mod Amount

Adjust amount of modulation. Target of the modulation can be specified in KBD Control Routing Panel.

33. Mode

Select operation mode, mono or chord.

Tabs

Sequence Tab

no function.

Note Switch Tab

Turn it on to enable Note Sequencer

Sample & Hold Tab

Tap this tab to show sample & hold options.



Sample & Hold

31. LFO Amount

Adjust amount of LFO1/LFO2 signal to be sampled.

32. Noise Amount

Adjust amount of pink noise/white noise signal to be sampled.

33. Hold

Select number of steps to hold the sampled CV.



Mod Envelope

28. Mod Attack

Adjust amount of attack time.

29. Mod Release

Adjust amount of release time



Delay

1. Delay Time

Adjust delay time.

2. LFO Frequency

Adjust frequency of LFO (low frequency oscillator).

3. HP Frequency

Adjust frequency of high pass filter for the delayed sound.

4. Feedback

Adjust amount of the feedback.

5. LFO intensity

Adjust amount of LFO delay time modulation.

6. LP Frequency

Adjust frequency of low pass filter for the delayed sound.

Sync Switch Tab

Turn it on to enable tempo sync.

Chorus / Flanger

7. LFO Frequency

Adjust frequency of the LFO.

8. LFO intensity

Adjust amount of LFO for delay time modulation.

9. Delay Time

Adjust delay time.

10. Chorus/Flanger

Select Chorus or Flanger.

11. Feedback

Adjust amount of the feedback.

12. Stereo Width

Adjust stereo width.

Sync Switch Tab

Turn it on to enable tempo sync.

Reverb

13. Room Size

Adjust room size of the late reflection.

14. Decay

Adjust decay of the late reflection.

15. Damping

Adjust absorption of high frequency in the late reflection.

16. Auto Size

Turn it on to enable auto size mode.

17. Pre Delay

Adjust pre delay time of the early reflection.

Adjust frequency of output low pass filter.

18. Output LP Frequency

Sync Switch Tab

Turn it on to enable tempo sync.

EQ and Mixer

19. High Frequency

Adjust frequency of high shelving filter.

20. Mid Frequency

Adjust frequency of mid peak / notch filter.

21. Low Frequency

Adjust frequency of low shelving filter.

22. High Gain

Adjust gain of the high shelving filter.

23. Mid Gain

Adjust gain of the mid peak / notch filter.

24. Low Gain

Adjust gain of the low shelving filter.

Compressor and Main Output

25. Reduction Gain Meter

Indicate amount of gain reduction.

Adjust level of threshold to begin compression.

26. Attack

Adjust time to start compression.

29. Release

Adjust time to end compression.

27. Threshold

30. Makeup

Adjust amount of makeup gain.

Master Output

31. Volume

Adjust amount of master volume.

32. Pan

Adjust amount of master pan.

33. Mute

Turn it on to mute output signal.



Chorus / Flanger

7. Sine/Triangle

Adjust shape of the LFO waveform, Sine or Triangle.

Adjust frequency of high pass filter for the effected sound.

8. HP Frequency

9. LP Frequency

Adjust frequency of high pass filter for the effected sound.

Reverb

13. HP Frequency

Adjust frequency of input high pass filter.

16. LP Frequency

Adjust frequency of input low pass filter.

14. LFO Frequency

Adjust frequency of LFO (Low Frequency Oscillator).

17. LFO intensity

Adjust amount of LFO for delay time modulation.

15. Early/Late

Adjust amount of the early reflection and amount of the late reflection.

18. EFX Input

Adjust amount of input signal from Delay and Chorus/Flanger.

Mixer

19. Delay Level

Adjust level of Delay.

20. C/F Level

Adjust level of Chorus / Flanger.

21. Reverb Level

Adjust level of Reverb.

Compressor

26. Input Gain

Adjust amount of input gain.

27. HP Frequency

Adjust frequency of high pass filter at the input of the compressor.

28. Ratio

Adjust compression ratio.

29. Dry/Wet

Adjust amount of the dry and wet signal.



A. Delay Sync Switch Tab

Turn it on to enable tempo sync.

B. C/F Sync Switch Tab

Turn it on to enable tempo sync.

C. Reverb Sync Switch Tab

Turn it on to enable tempo sync.

1. Delay: Delay Time

Adjust delay time in note length.

7. C/F: LFO Frequency

Adjust frequency in note length.

13. Reverb: Room Size

Adjust room size in note length.

14. Reverb: LFO Frequency

Adjust frequency in note length.

Sources 1		Targets 2						
KBD Ctrl	Mod Wheel							
	Velocity	LFO1 > OP FM	LFO1 > OP AM	LFO1 > LPF CF	LFO1 > HPF CF	LFO1 > VCA AM	LFO1 > VCA PAN	OP Freq
	Aftertouch							
	Poly Pressure	LFO2 > OP FM	LFO2 > OP AM	LFO2 > LPF CF	LFO2 > HPF CF	LFO2 > VCA AM	LFO2 > VCA PAN	MO Level
	Expression							
	Step Seq							
	Per Note Ctrl	LPF CF	HPF CF	Vibrato Depth	Tremolo Depth	Reverb Send	Chorus Send	Delay Send

KBD Control Routing


1. Control Sources

Select Keyboard Controller.

2. Control Targets

Select target parameters to control.

Keyboard

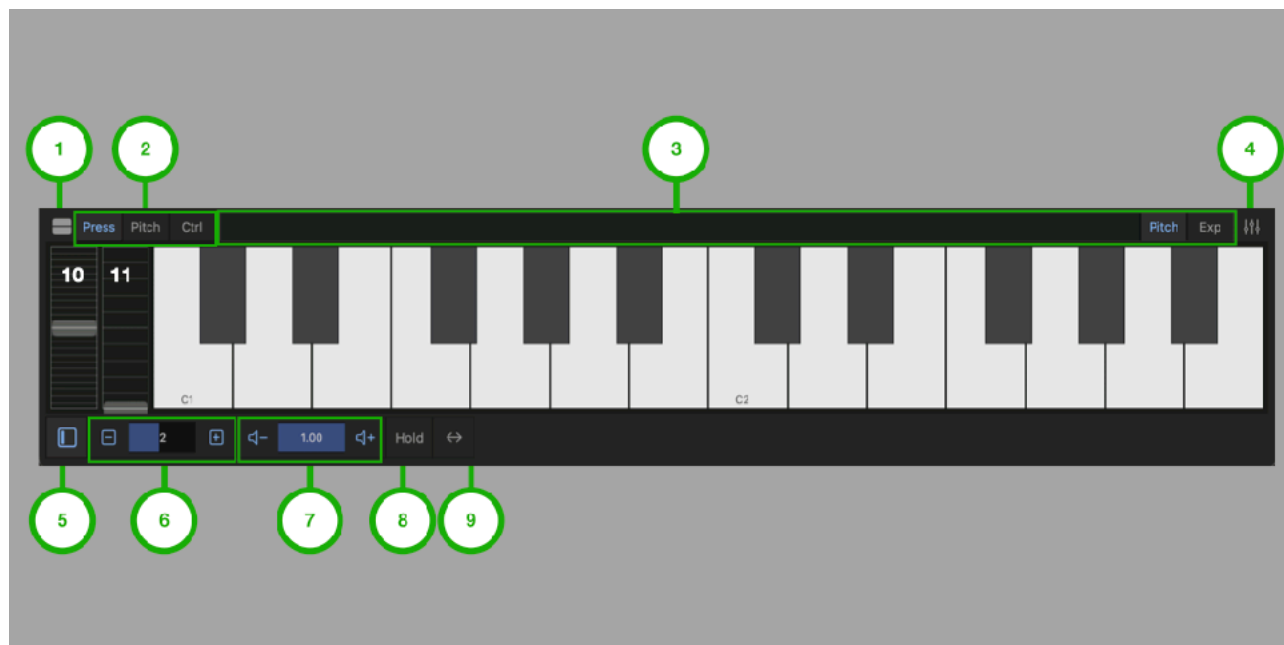

1. Split Button

Tap this button to show split keyboard.

2. Per Note Control Targets

Select targets of Per Note Control. Apply the control by movement on Y axis of Key. Options are pressure, pitch and control.

3. Ribbon Controller

Drag on the Ribbon to control Pitch or Expression. Targets of the ribbon control can be selected by pitch and expression buttons on the left. Targets of the expression can be selected in KBD Control Routing Panel.

4. Macro Control Switch

Tap this button to show assignable macro controllers.

5. Wheel View Switch

Tap this button to show/hide pitch wheel and mod wheel.

6. Octave Range

Use plus / minus buttons to adjust octave range of the keyboard. Indicator shows lowest note of the keyboard¹. When “Midi Monitor” is enabled, the range is automatically set based on the incoming midi note.

7. Velocity

Use plus/minus button to adjust keyboard velocity.

8. Hold

Tap this button to enable /disable key holding.

9. Scroll

Tap this button to enable/disable keyboard scrolling.

10. Pitch Wheel


Adjust pitch of the oscillators. Range is plus / minus one octave.

11. Mod Wheel

Adjust amount of the modulation. Targets of the modulation can be selected in KBD Control Routing Panel.

¹ Middle C (midi note 60) is C3.

Visualizer

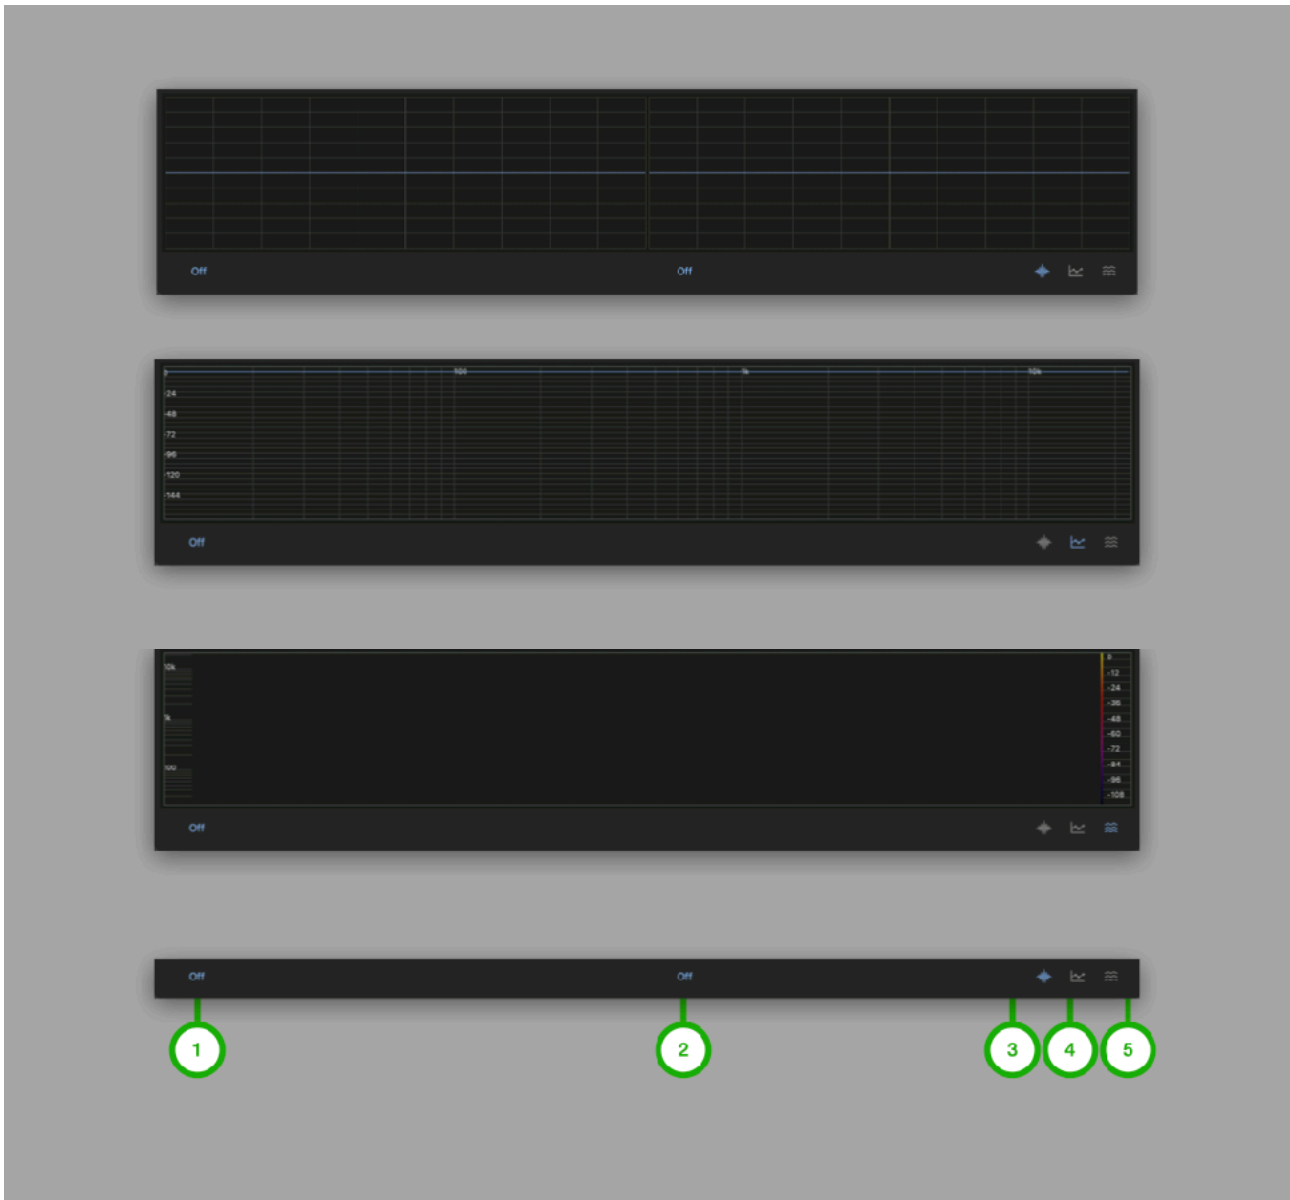

1. Audio Source Selector

Tap this button to show a list. Select audio source for the visualization.

2. Audio Source Selector

Tap this button to show a list. Select audio source for the visualization.

3. Oscilloscope Button

Tap this button to select Oscilloscope.


4. Spectrum Plot Button

Tap this button to select Spectrum Plot.

5. Spectrogram Button

Tap this button to select Spectrogram.



Tap and hold (right click on macOS) to show context menu.

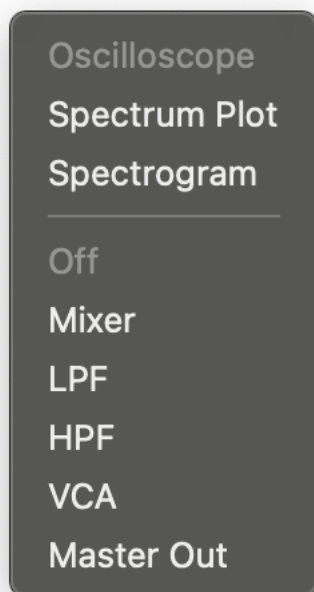

Select a tool for audio visualization. Options are Oscilloscope, Spectrum Plot and Spectrogram.


Select a source of audio for the visualization.

Sequencer

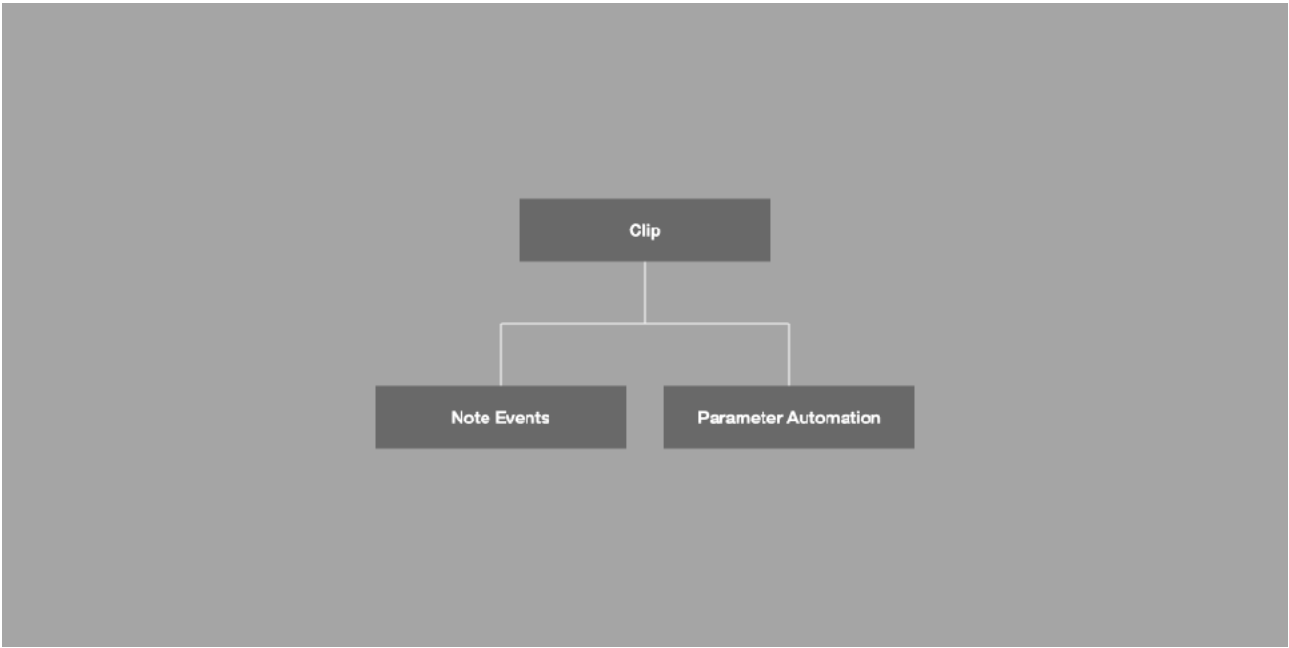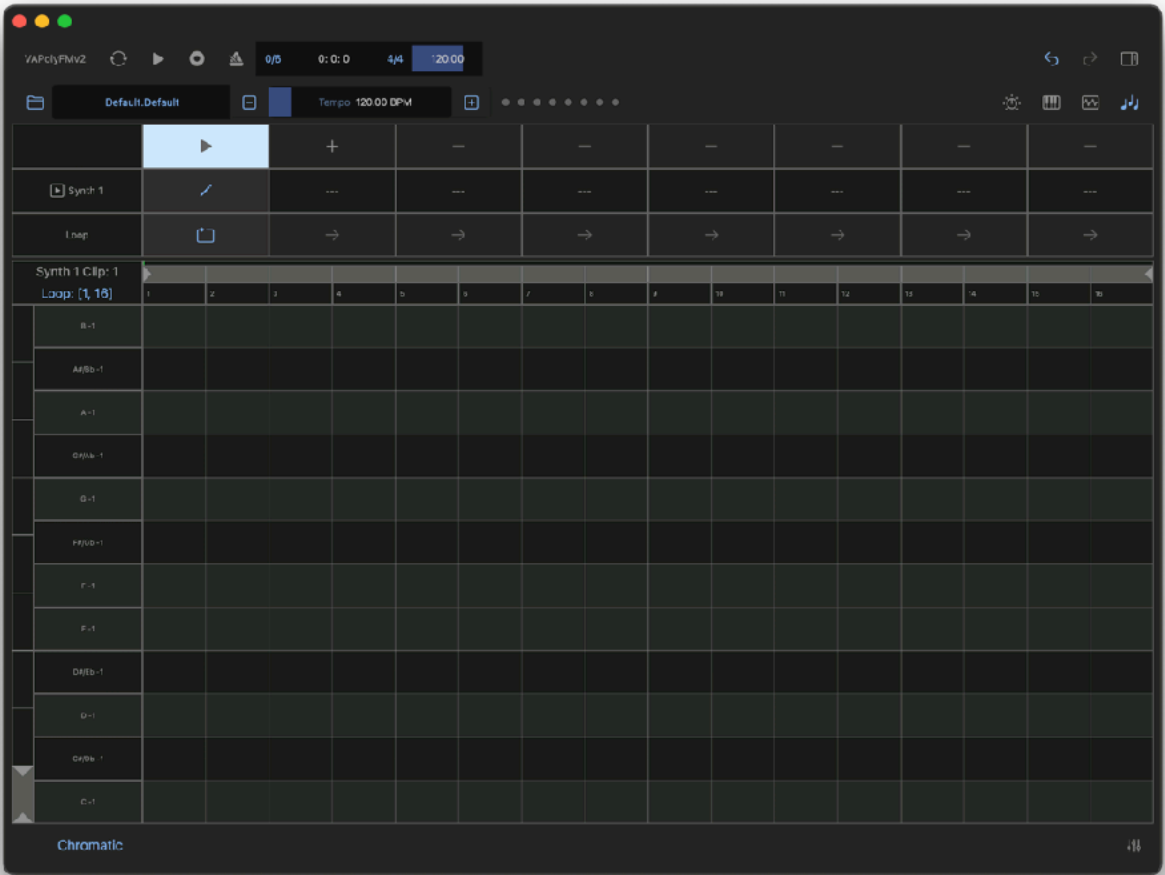

Clip contains note events and parameter automation events for each timbral. Maximum length of clip is 16 bars. Maximum number of clips are 8.

Clip Editor

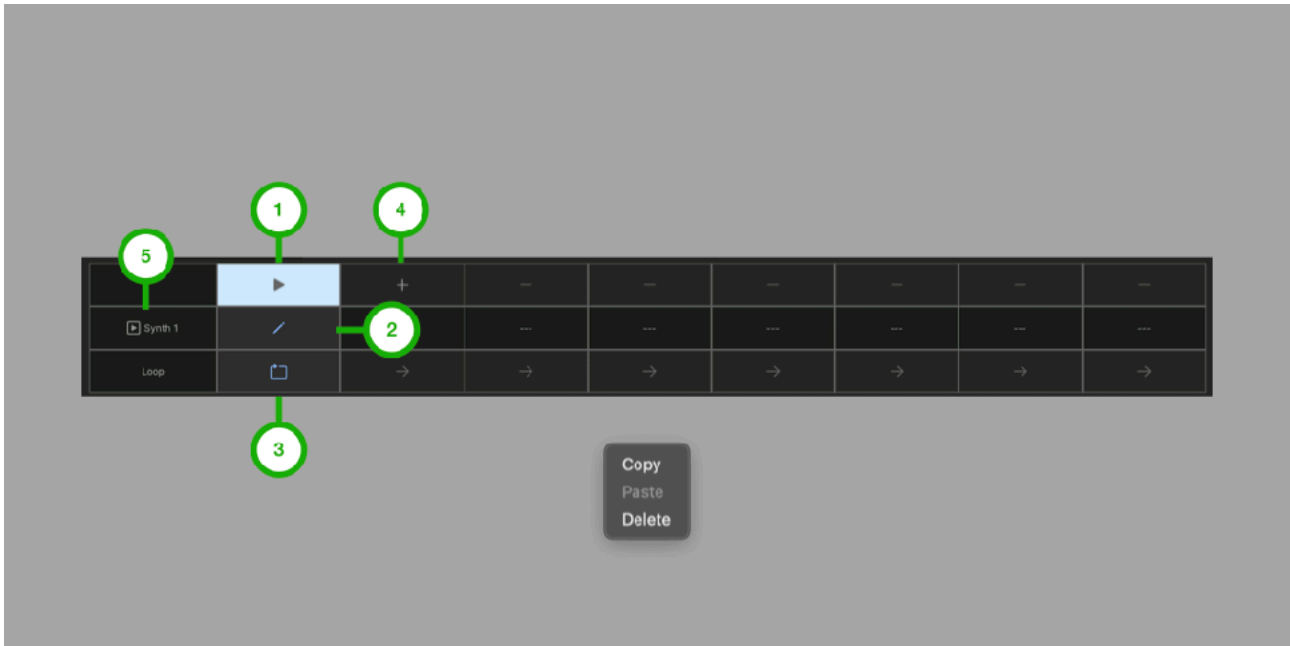

1. Launch Button

Tap this button to play/stop clip.

2. Edit Button

Tap this button to open piano roll editor.

3. Loop Selector

Select loop options.


4. Add Button

Tap this button to add edit button.

5. Auto Select Button

Enable/Disable Auto Select to select editor while sequencer is playing.

Piano Roll Editor

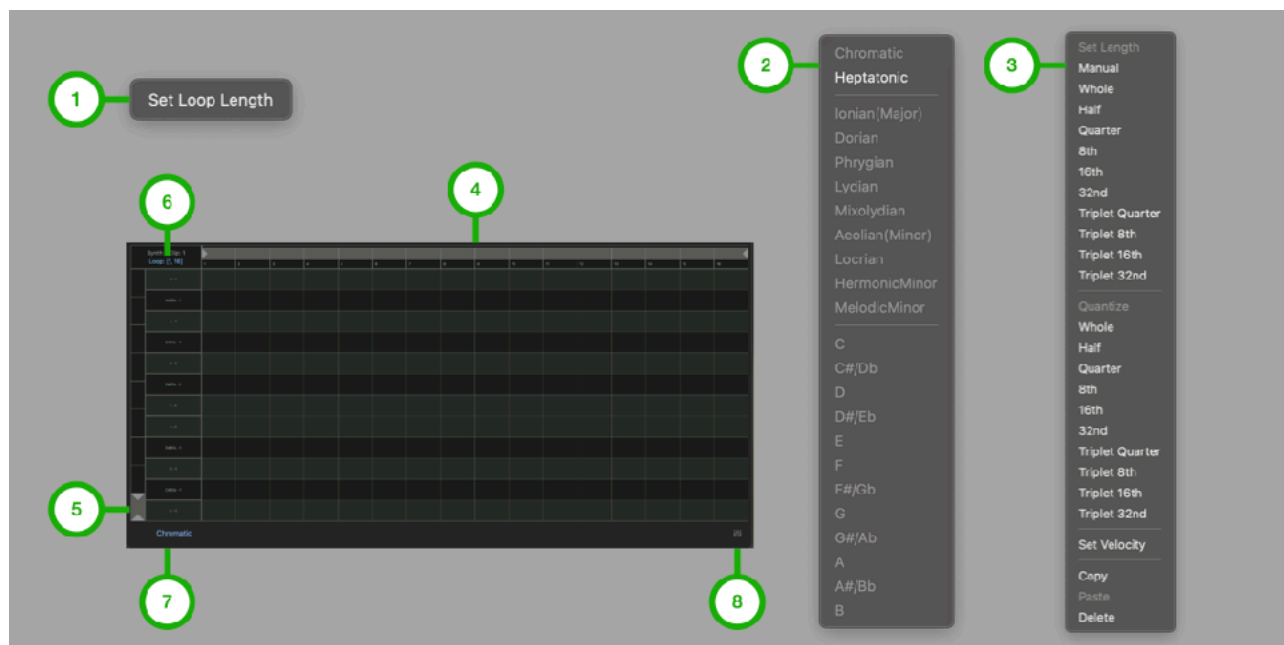

1. Loop Menu

Press and hold (right click on macOS) Time Range Selector to show this menu. Tap on “Set Loop Length” to set loop length to current length selected by the Time Range Selector.

2. Scale Menu

Press and hold (right click on macOS) editor to show this menu.

3. Editing Menu

Press and hold (right click on macOS) note to show this menu.

4. Time Range Selector

Select time range for editing and for loop length. On iOS, pinch gesture control zooming and drag gesture control scroll position.

5. Note Range Selector

Select note range for editing. On iOS, pinch gesture control zooming and drag gesture control scroll position.

6. Loop Range

Tap this button to show Loop Menu.


7. Scale

Tap this button to show Scale Menu

8. Parameter Automation Button

Tap this button to show Parameter Automation Editor

Parameter Automation Editor

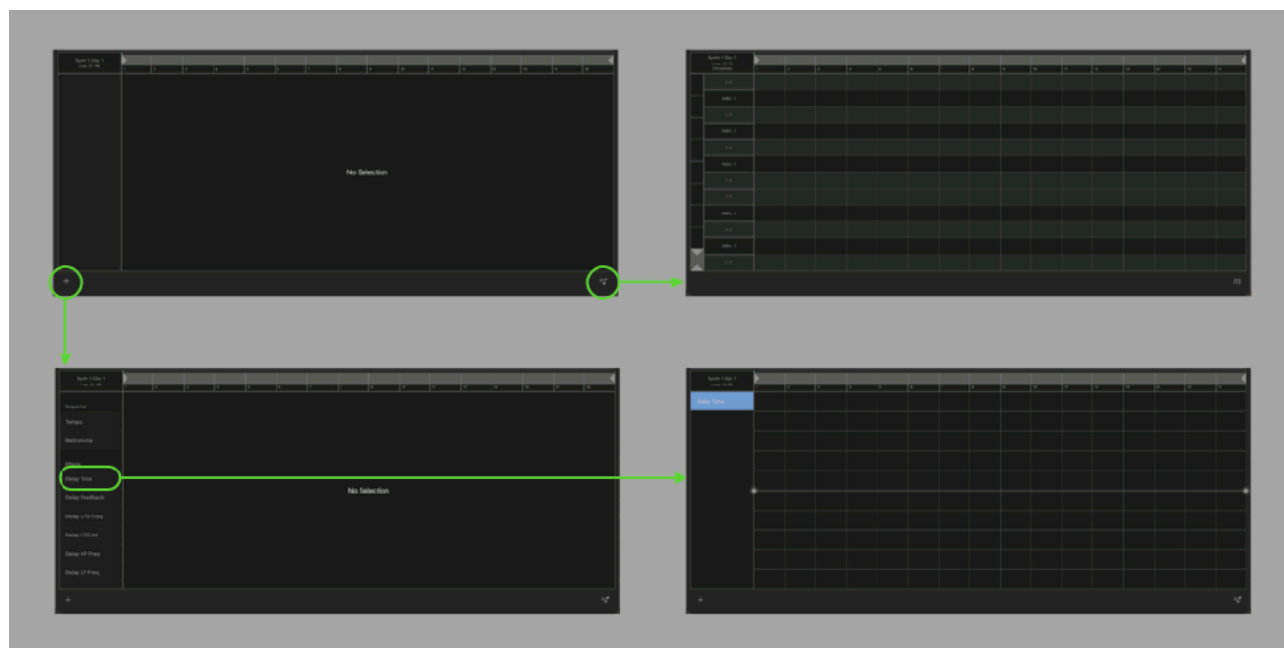

1. Loop Menu

Press and hold (right click on macOS) Time Range Selector to show this menu. Tap on "Set Loop Length" to set loop length to current length selected by the Time Range Selector.

2. List Menu

Press and hold (right click on macOS) item in parameter list to show this menu.

3. Editing Menu

Press and hold (right click on macOS) editor to show this menu.

4. Time Range Selector

Select time range for editing and for loop length.

5. Add Button

Tap this button to select parameter to edit.

6. Piano Roll Button

Tap this button to show piano roll editor.



Synthesizer


VAPolyFM is polyphonic FM synthesizer. FM synthesis generate rich harmonic tone by modulating carrier by modulator. Carrier and modulator are called operator. Operator contains sine wave oscillator, amplifier, envelope generator and pitch envelope generator.

Output of the synthesizer is routed to effects, mixer, EQ, compressor and main output amplifier.


Each Voice of the synthesizer consists of operators, mixer, resonant low pass filter, resonant high pass filter, amplifier, two envelope generators and LFO.

Block diagram

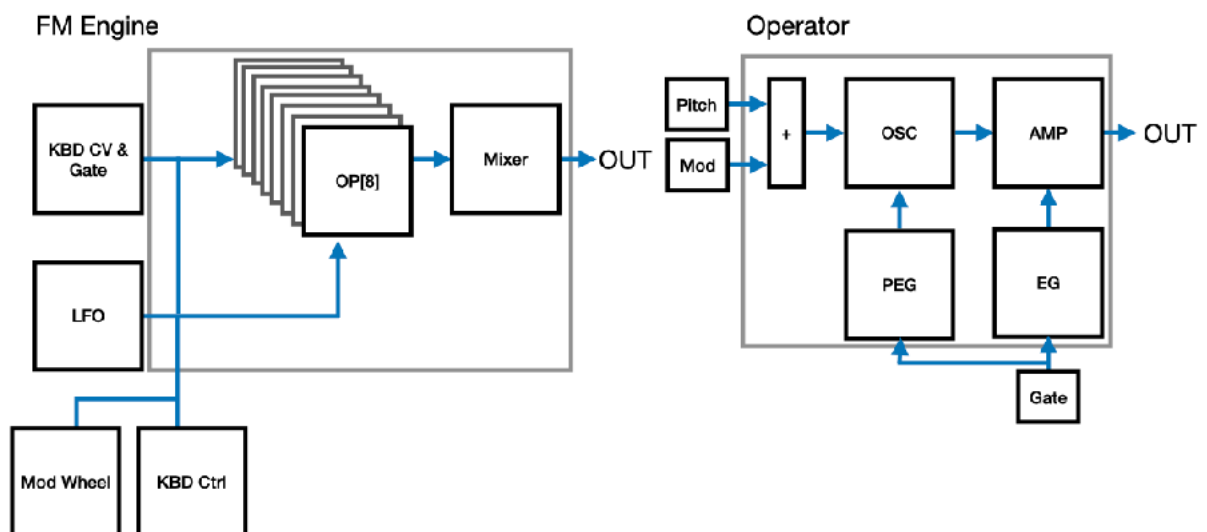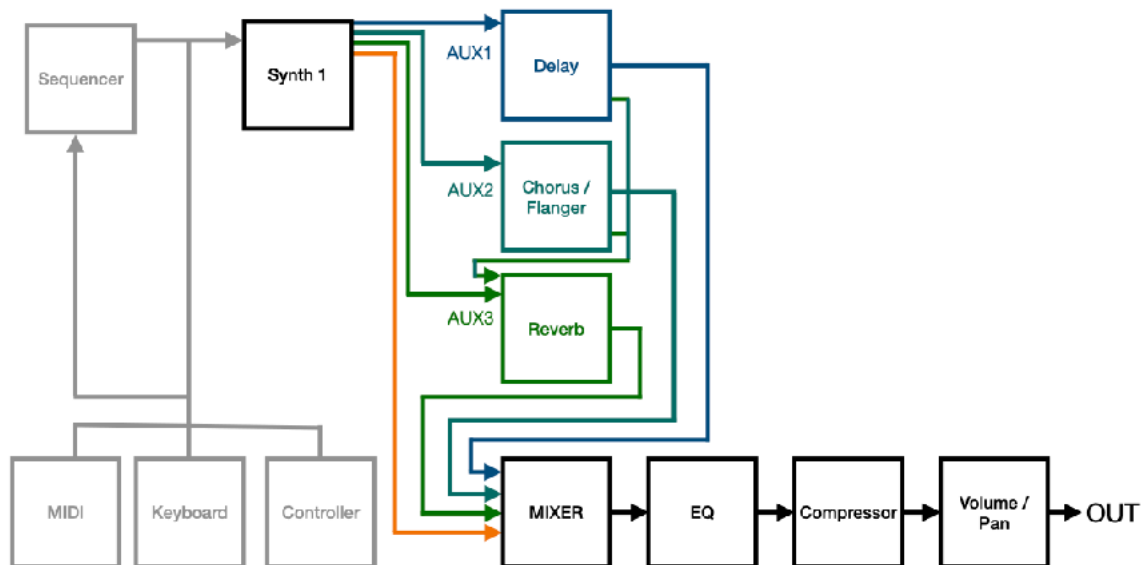

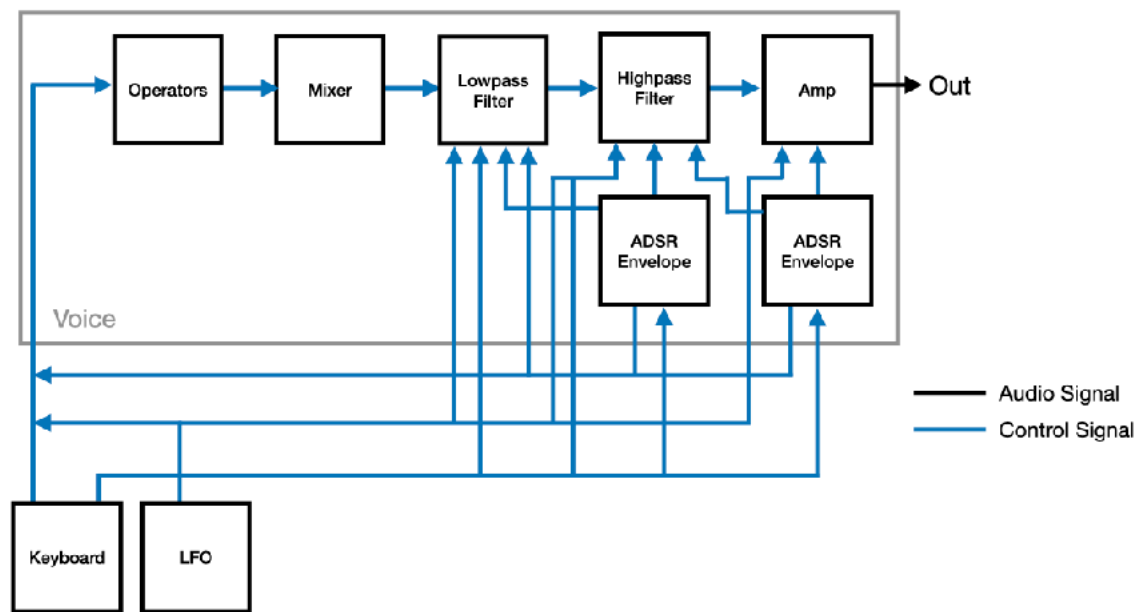


Control Signal & MIDI Flow

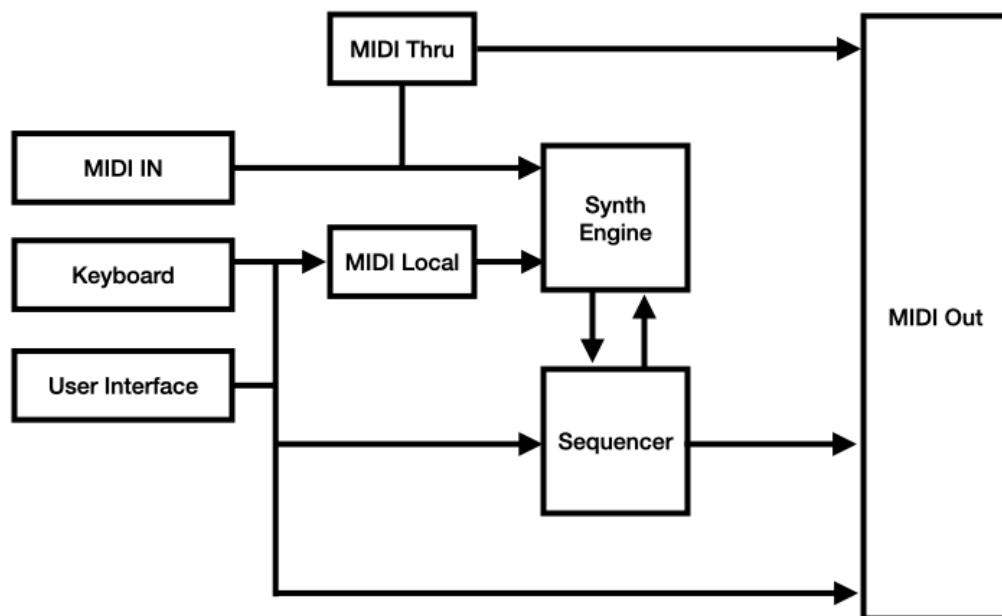

Operator

Operator is a basic building block of FM synthesizer. Operator contains sine wave oscillator, amplifier, envelope generator and pitch envelope generator. Operator can be carrier or modulator. Only carrier generates output sound.

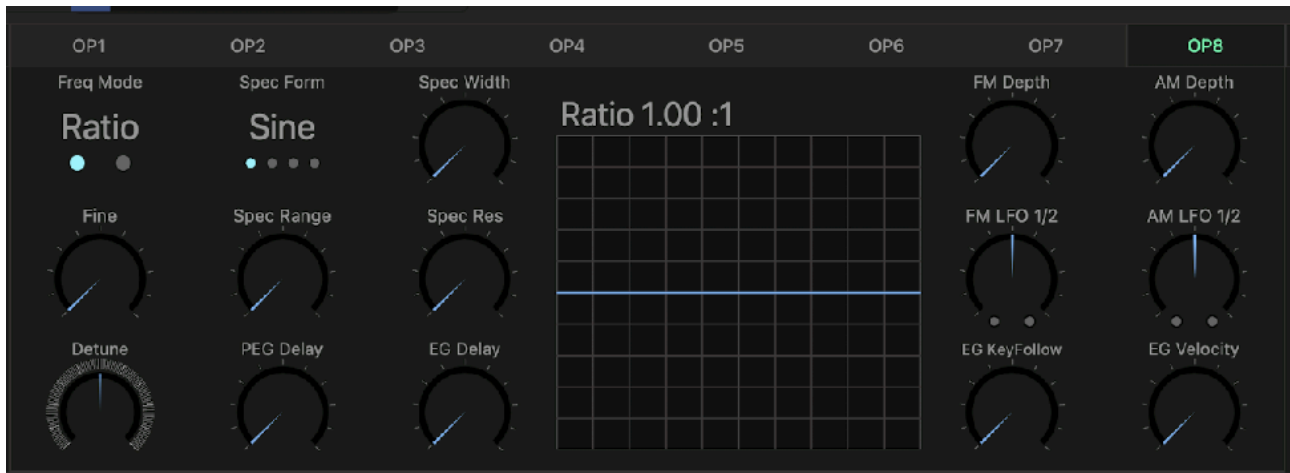

Frequency Mode

Select ratio or fixed. In ratio, frequency of oscillator can be set as harmonic index ratio. In fixed, frequency of the oscillator can be set as fixed frequency (Hz).

Fine

Set fine frequency of oscillator. When mode is ratio, range is from 1 to 2.0 times. When mode is fixed, range is from 1 to 10 times. (frequency = coarse x fine.)

Detune

Adjust fine pitch of the oscillator. (+/- 50 cents)

Spectral Form

Select spectral form. Options are Sine, All, Odd and Resonance. Sine contains no harmonic overtone. All contains all harmonic overtones. Odd contains odd harmonics. Resonance has a peak on a particular harmonics.

Spectral Range

Adjust spectral range for All, Odd and Resonance in decibel scale level.

Spectral Width

Adjust width of transition band for All, Odd and Resonance in decibel scale level.

Spectral Resonance

Adjust peak harmonics for Resonance.

PEG Delay

Adjust delay time of pitch envelope. Envelope is triggered after the delay.

EG Delay

Adjust delay time of envelope. Envelope is triggered after the delay.

FM Depth

Adjust master amount of exponential frequency modulation.

FM LFO 1/2

Adjust amount of LFO1/LFO2 signal for frequency modulation. Turn the dial counter clockwise to increase amount of LFO1. Turn the dial clockwise to increase amount of LFO2.

AM Depth

Adjust master amount of amplitude modulation.

AM LFO 1/2


Adjust amount of LFO1/LFO2 signal for amplitude modulation. Turn the dial counter clockwise to increase amount of LFO1. Turn the dial clockwise to increase amount of LFO2.

EG Key Follow

Adjust amount that KBD CV affect length of envelope.

EG Velocity

Adjust amount that KBD Velocity affect level of envelope.

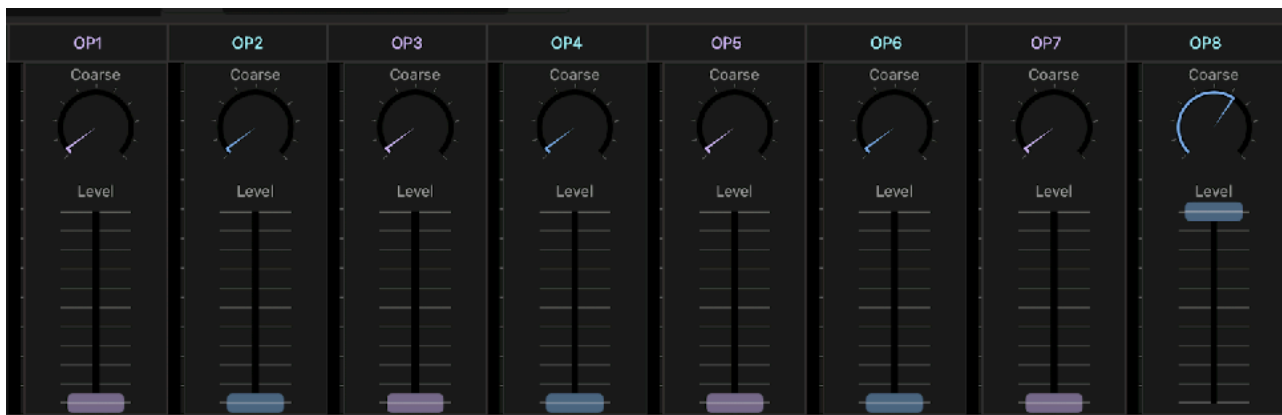

OP Switch

Turn operator on or off. When turned on, color of Carrier is blue. color of Modulator is purple.


Coarse

Set coarse frequency of oscillator. When ratio mode is selected, it set integer value of

harmonic index ratio from 0.5 to 31. When fixed mode is selected, it set fixed frequency of 1 Hz, 10Hz, 100Hz or 1kHz.

Level

Adjust output level of operator in dB scale from -60 dB to 0 dB.

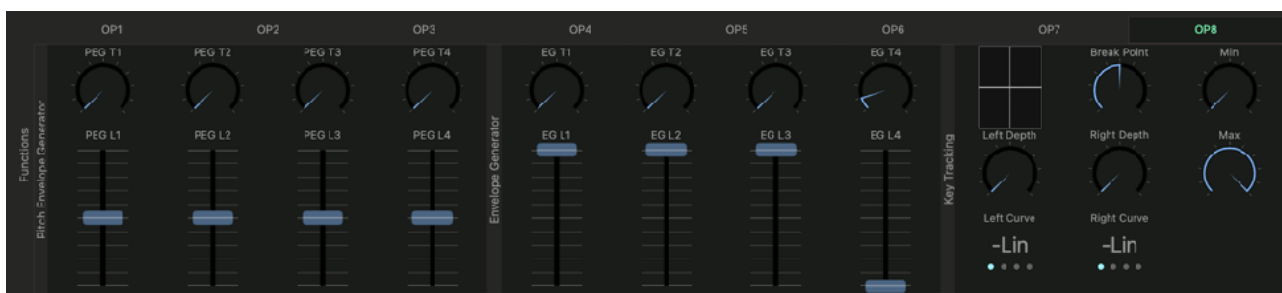

Pitch Envelope Generator

PEG T1...T4

Adjust time of stage 1...4 of pitch envelope.

PEG L1...L4

Adjust pitch of stage 1...4 of pitch envelope from -48 semi tones to 48 semi tones.

Envelope Generator

EG T1...T4

Adjust time of stage 1...4 of envelope.

EG L1...L4

Adjust level of stage 1...4 of envelope in dB scale from -60 dB to 0 dB.

Key Tracking

Break Point

Adjust break point as note value.

Left Depth

Adjust amount of key tracking for left curve.

Left Curve

Select curve from -linear, +linear, -Exponent or +Exponent.

Right Depth

Adjust amount of key tracking for right curve.

Right Curve


Select curve from -linear, +linear, -Exponent or +Exponent.

Min

Adjust minimum note value for key tracking. when note below the min is played, level of operator is turd down to -Infinity dB.

Max

Adjust maximum note value for key tracking. when note above the max is played, level of operator is turd down to -Infinity dB.

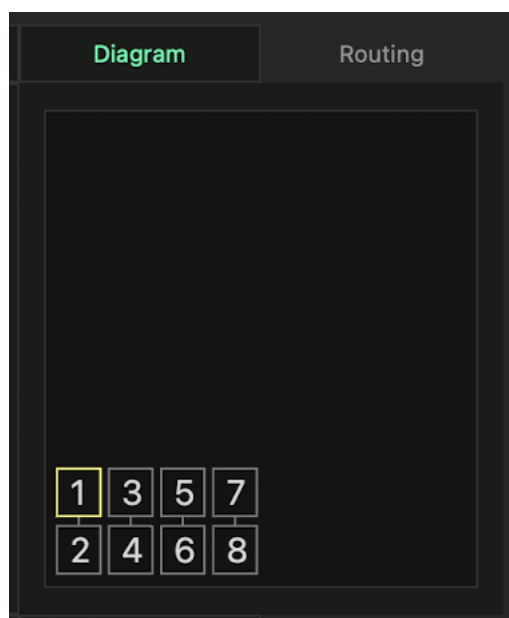

Modulation Targets		o1	o2	o3	o4	o5	o6	o7	o8	FBK
Modulation Signals	o1		Blue							Yellow
	o2									
	o3			Blue						
	o4									
	o5					Blue				
	o6									
	o7							Blue		
	o8									
FBK		Yellow								

Diagram

Shows operator routing in diagram.


Routing

Shows operator routing editor. Set which operator modulate which operator. Also set source of feedback and target of the feedback.


Basic rule is Operator 1 is top of modulation chain and Operator 8 is bottom of the modulation chain. Operator 1 can modulate every other operators. Operator 8 can't modulate any operators. Small number Operator can modulate large number operator, but large number Operator can't modulate small number operator.

Color is changed to Red when complicated result is expected to be seen in Diagram.

Five Stage Envelope Generator

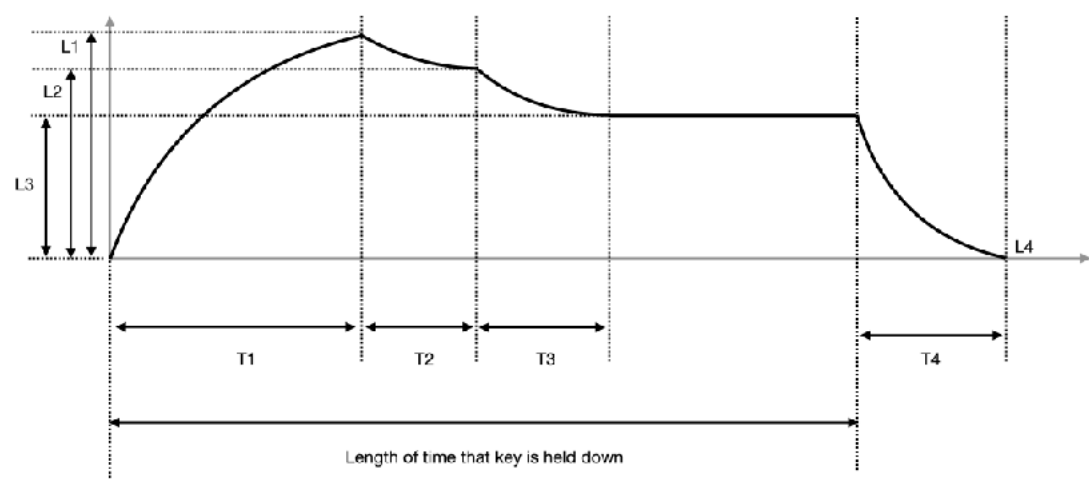

Key Tracking

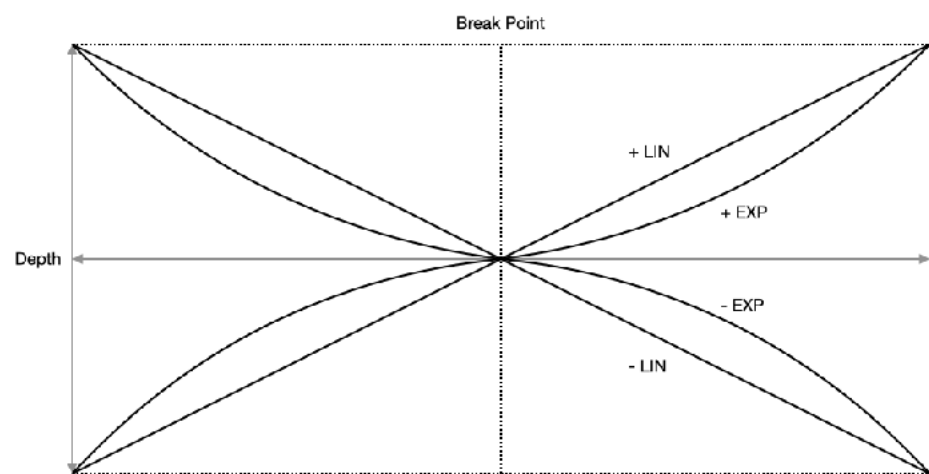

Global



Transpose

Adjust amount of transpose (+/- 24 semi tones).

Master Tune

Adjust amount of master tune (+/- 50 cents).

Glide Time

Adjust time of the glide from 10 ms to 10 second. Glide is applied in polyphonic and unison when notes are played in legato.


ARP (Arpeggio)

Pattern

Select a pattern of the arpeggio. Options are up, down, up & down and random.

Rate

Adjust frequency of the clock for arpeggio. When tempo sync is off, range of the frequency is from 1 Hz to 20 Hz. When tempo sync is on, range of the rate is from 1/32 to 1 bars.

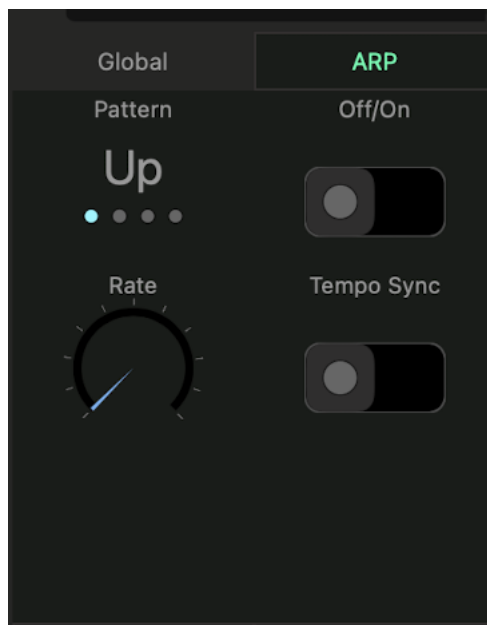

Unison

Turn this switch on to enable unison mode. When Unison mode is enabled, specified number of voices are stacked to generate monophonic sound.

Voices

Select maximum number of voices. When using a device with less powerful CPU, it may need to reduce maximum number of voices.

Stereo Width

Adjust amount of pan for each voices.

Switch

Turn this switch on to enable arpeggio. Arpeggio works per timbre.

Tempo Sync

Turn this switch on to sync the rate of the clock with tempo.



Volume


Adjust output level of Mixer in decibel scale.

Feedback

Adjust amount of feedback in decibel scale.

Key Sync

Turn Oscillator key sync On or Off. When it is turned on, oscillator reset each time key is pressed.

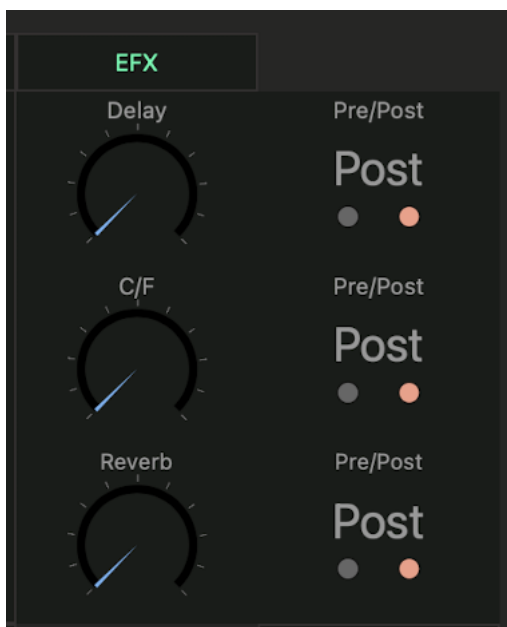

Delay Pre/Post

Select Pre (pre fader) or post (post fader) to specify source of the signal for delay.

C/F Send

Adjust level of the signal send to chorus / flanger effect.

C/F Pre/Post

Select Pre (pre fader) or post (post fader) to specify source of the signal for chorus/flanger.

Reverb Send

Adjust level of the signal send to reverb effect.

Reverb Pre/Post

Select Pre (pre fader) or post (post fader) to specify source of the signal for reverb.

Delay Send

Adjust level of the signal send to delay effect.

“Pre” means pre fader. Signal is taken before volume level is applied to the signal.
 “Post” means post fader. Signal is taken after volume level is applied to the signal.

Low Pass Filter

This low pass filter is modeled on the Cascaded OTA -24dB per octave low pass filter circuit. The filter is capable of self oscillation when resonance is at the maximum position. Cutoff frequency of the low pass filter can be modulated by an ADSR envelope and a LFO. Also the cutoff frequency can be controlled by keyboard with the amount adjusted by key follow parameter.



Cutoff

Adjusts the cutoff frequency of the filter.

Resonance

Adjusts resonance of the filter.

Mod Amount

Adjust amount of cutoff frequency modulation.

Env 1/2

Adjust amount of ENV1/ ENV2 signal for cutoff modulation. Turn the dial counter clockwise to increase amount of ENV1. Turn the dial clockwise to increase amount of ENV2.

LFO 1/2

Adjust amount of LFO1/LFO2 signal for cutoff modulation. Turn the dial counter clockwise to increase amount of LFO1. Turn the dial clockwise to increase amount of LFO2.

Key Follow

Adjust amount of key follow. When it is 100%, cutoff frequency is equals to keyboard note frequency.

LPF Slope

Select slope of the filter, -12dB Per Octave or -24 dB Per Octave.

High Pass Filter

This high pass filter is modeled on the Sallen-Key -12dB per octave high pass filter circuit. The filter is capable of self oscillation when resonance is at the maximum position. Cutoff frequency of the high pass filter can be modulated by an ADSR envelope and a LFO. Also the cutoff frequency can be controlled by keyboard with the amount adjusted by key follow parameter.



Cutoff

Adjusts the cutoff frequency of the filter.

Resonance

Adjusts resonance of the filter.

Mod Amount

Adjust amount of cutoff frequency modulation.

Env 1/2

Adjust amount of ENV1/ ENV2 signal for cutoff modulation. Turn the dial counter clockwise to

increase amount of ENV1. Turn the dial clockwise to increase amount of ENV2.

LFO 1/2

Adjust amount of LFO1/LFO2 signal for cutoff modulation. Turn the dial counter clockwise to increase amount of LFO1. Turn the dial clockwise to increase amount of LFO2.

Key Follow

Adjust amount of key follow. When it is 100%, cutoff frequency is equals to keyboard note frequency.

VCA (Amplifier)

The output signal of the filter is routed to the amplifier. The signal is shaped by gate signal or ADSR envelope. The audio signal can be modulated by LFO. The output level can be adjusted by volume parameter.



Volume

Adjust volume of Output Signal.

PAN

Adjust amount of pan modulation.

AM

Adjust amount of amplitude modulation.

Env

Select an envelope for the amplifier, Gate, Env1 or Env2.

AM LFO

Adjust amount of LFO signal for Amplitude Modulation. Turn the dial counter clockwise to increase amount of LFO1. Turn the dial clockwise to increase amount of LFO2.

Pan LFO

Adjust amount of LFO signal for Pan Modulation. Turn the dial counter clockwise to increase amount of LFO1. Turn the dial clockwise to increase amount of LFO2. When dial is in center position, pan can be adjusted manually.

ADSR (Envelope Generator)

ADSR is an analog style non-linear envelope generator.



Attack

Adjust the attack time of the ADSR envelope (from 1 ms to 6 sec)

Decay

Adjust the decay time of the ADSR envelope (from 1 ms to 10 sec)

Sustain

Adjust sustain amount of the ADSR envelope (from 0% to 100%)

Release

Adjust release time of the ADSR envelope (from 1 ms to 10 sec)

Velocity


Adjust amount that Keyboard velocity affect level of envelope.

Key Follow

Adjust amount that CV affect length of envelope.


Delay

Adjust delay time to trigger the ADSR envelope (from 0 ms to 10 sec)

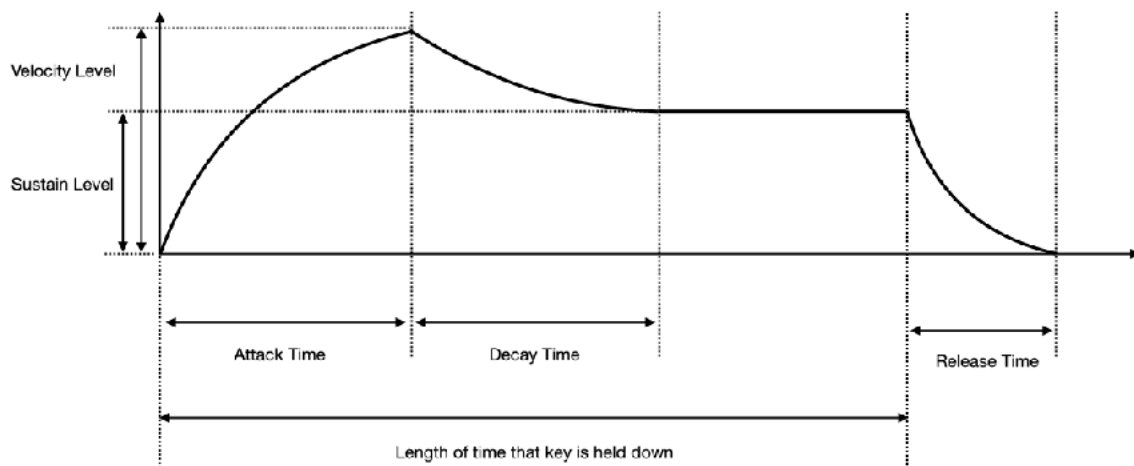

LFO

LFO (Low Frequency Oscillator) can generate 6 wave shapes and the frequency of the LFO can be set by Hz or note value when LFO is synchronized to tempo. Amplitude of the LFO can be modulated by ADSR envelope. LFO1 is common for all voices. LFO2 is polyphonic.

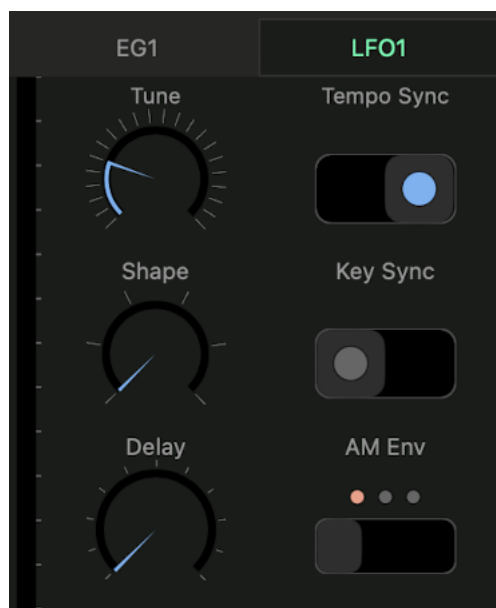

Tune

Adjust frequency of the LFO. When sync is off, range of the frequency is from 0.04Hz to 42.2Hz. When sync is on, range of the rate is from 1/64 to 8 bars.

Shape

Select shape of the LFO waveform. Wave shapes are sine, saw, down saw, square, triangle and random.

Delay

Adjust delay time to start the LFO signal.



Tempo Sync

Turn this switch on to sync the rate of the LFO with tempo.

Key Sync (Key Re-Trigger)

Turn this switch on to restart the LFO cycle every time a new note is played.

AM Env

Select an envelope to modulate amplitude of LFO. Options are OFF, Env1 and Env2.

Env Mod

Select an envelope modulation. Options are off, AM Env1, AM Env2, FM Env1 and FM Env2.

Output Mixer

Output Signals from the effects can be adjusted by output mixer.



Delay Level

Adjust level of delay signal to EQ.

C/F Level

Adjust level of Chorus / Flanger signal to EQ.

Reverb Level

Adjust level of Reverb Signal to EQ.

Master Output

Level and Pan of the master output can be adjusted in master section.



Volume

Adjust level of the master output.

Pan

Adjust pan of the master output.

Mute

Turn on to mute master output.

Step Sequencer

Analog Style 8 Step Sequencer to play notes and modulate target parameters.



Step



Gate

Adjust amount of Gate signal (Velocity) for the step. Range is from 0% to 100%.

CV

Adjust Amount of CV signal (Pitch) for the step. For note value, range varies by setting of Root Key and Octave Range. For modulation signal, range is from 0.0 to 1.0.

Step Switch

Turn it on to enable the step. When it is turned off, previous note continues on the step.

Sequencer Options



Stop/Play

Turn it on to enable sequencer for playing. Tap any key on keyboard to start the sequencer.

Rate

Adjust frequency of clock to drive the sequencer.

Tempo Sync

Turn it on to enable Tempo Sync.

Note Switch

Turn it on to play note by the sequencer.

Quantize

Select a quantize option for CV signal. Options are Off, Minor or Major.

Root Key

Select a Root Key of CV signal. Range is from C-2 to F#/Gb8 (MIDI 0 ... 126). Turn it full

clockwise to set as KBD Note. When KBD Note is selected, press a key on keyboard to select the root key.

Octave Range

Select an Octave Range of CV signal. Range is from 0 to 9.

Sequence Tab

Tap this tab to show sequencer options.

Steps

Select number of steps for the loop.

Mod Amount

Adjust amount of modulation. Target of the modulation can be specified in KBD Control Routing Panel. Range is from 0% to 100.0%.

Mode

Select an operation mode. Options are mono and chord. When chord is selected, use Quantize option to select Minor or Major.

S&H



S&H (Sample and Hold) Tab

Tap this tab to show S&H options.

Mod Envelope



Mod Attack

Adjust amount of attack time.

Mod Release

Adjust amount of release time.

Sample and hold is turned off if both of the LFO amount and the Noise amount are zero.

LFO Amount (Sample Source Mixer)

Adjust amount of LFO1/LFO2 signal to be sampled on active step.

Noise Amount (Sample Source Mixer)

Adjust amount of pink noise/white noise signal to be sampled on active step.

Hold

Select number of steps to hold the sampled CV sequences. Options are 8, 16, 32, 64, 128 and 256. When the value is 256, 8 steps are repeated 32 times. Length of the loop is depended on the Clock Rate.

KBD Control Routing

Sources		Targets						
KBD Ctrl	Mod Wheel	LFO1 > OP FM	LFO1 > OP AM	LFO1 > LPF CF	LFO1 > HPF CF	LFO1 > VCA AM	LFO1 > VCA PAN	OP Freq
	Velocity							
	Aftertouch							
	Poly Pressure	LFO2 > OP FM	LFO2 > OP AM	LFO2 > LPF CF	LFO2 > HPF CF	LFO2 > VCA AM	LFO2 > VCA PAN	MO Level
	Expression							
	Step Seq	LPF CF	HPF CF	Vibrato Depth	Tremolo Depth	Reverb Send	Chorus Send	Delay Send
Per Note Ctrl								

Select targets to be controlled by Mod Wheel (CC#1), Velocity, Aftertouch, Poly Pressure, Expression (CC#11) and step sequencer. Targets are LFO modulations, operator ratio, modulator level, lowpass cutoff, high pass cutoff, Vibrato & Tremolo depth and effects send.

Sources		Targets						
KBD Ctrl	Mod Wheel							
	Velocity	OP Freq	MO Level	SP Range	FM Level	OP FM Depth	OP AM Depth	LPF CF
	Aftertouch							
	Poly Pressure	LPF Reso	LPF Mod	HPF CF	HPF Reso	HPF Mod	VCA Volume	VCA Pan
	Expression							
	Step Seq	Vibrato Rate	Tremolo Rate	Vibrato Depth	Tremolo Depth	Reverb Send	Chorus Send	Delay Send
	Per Note Ctrl							


Select targets to be controlled by MIDI Per Note Control Message. Targets are operator ratio, modulator level, spectral range, FM level, operator FM & AM, filter cutoff, resonance & env amount, VCA volume & Pan, Vibrato & Tremolo rate & depth and effects send.

Velocity, Aftertouch, Poly Pressure, Per Note Control can be controlled by movement of Y axis on key pads of the built-in keyboard. Expression can be controlled by ribbon controller.

Effects

Delay

Signal Flow

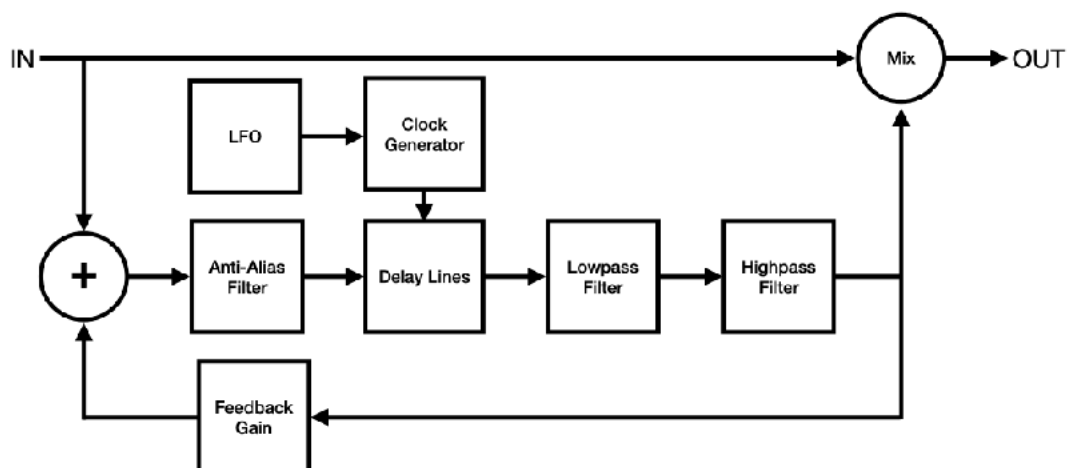

Delay Time

Adjust delay time from 20 ms to 1200 ms. When sync switch is turned on, delay time can be set as note value which is synchronized to the tempo. Valid range of the note value is automatically adjusted base on the current tempo.

Regeneration

Adjust feedback from 0 % to 100 %. You can change sound of the feedback by adjusting frequency of the high-pass filter and the low-pass filter.

Modulation


Modulation can be applied to the delayed signal. LFO (Low Frequency Oscillator) generates sine wave for the modulation.

Adjust LFO frequency from 0.01 Hz to 10 Hz.

Adjust LFO Intensity from 0 to 1.0, which adjust modulation width from 0 ms to +/- 10 ms.

Chorus / Flanger

Signal Flow

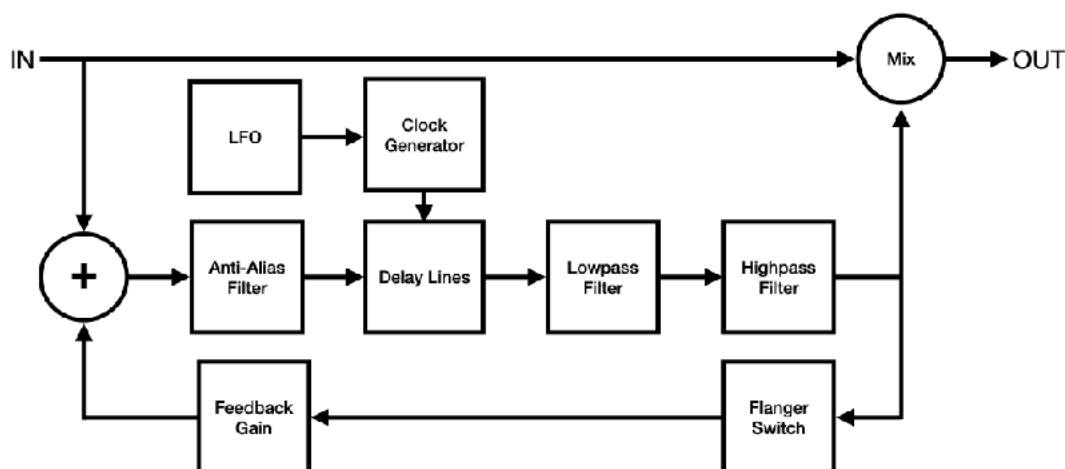

Input Signal Level

Level of input signal should be about -6dB or less. If the input signal is too hot, it will cause distortion in output signal.

Effect Type

Select effect type from chorus or flanger. Ranges of the delay time and the LFO Intensity change based on the selected effect type.

Modulation Speed

LFO Frequency dial controls speed of the modulation. When sync switch is turned on, LFO Frequency can be set as note value which is synchronized to the tempo. Valid range of the note value is automatically adjusted base on the current tempo.

Modulation Width

LFO Intensity dial controls width of the modulation and delay time dial controls center position of the modulation.

When chorus effect is selected, range of the LFO intensity is from 0 ms to 1 ms and range of the delay time is from 1 ms to 40 ms.

When flanger effect is selected, range of the LFO intensity is from 0 ms to 12 ms and range of the delay time is from 1 ms to 13 ms.

Rotate delay time dial counterclockwise to emphasize higher frequency or clockwise to emphasize lower frequency.²

LFO Shape

LFO shape dial controls shape of the LFO waveform. When the dial is rotated fully counterclockwise, shape of the waveform is sine wave. When the dial is rotated fully clockwise, shape of the waveform is triangle wave.

Stereo Width

Stereo Width dial controls phase offset of the LFO. When the dial is rotated fully counterclockwise, stereo width is 0%. (phase offset is 0 degree) When the dial is rotated fully clockwise, stereo width is 100%. (phase offset is 180 degree)

Regeneration

Feedback dial controls amount of regeneration from 0 % to 100 %. Turning the feedback dial clockwise enhances amount of the feedback effect.


² If compared with manual knob of the analog flanger guitar pedal, emphasized frequency moves reverse direction.

Filters

Delayed signal is routed to high-pass filter and low-pass filter before mixed with dry signal. HP frequency controls frequency of the high-pass filter. LP frequency controls frequency of the low-pass filter.

Reverb

Signal Flow

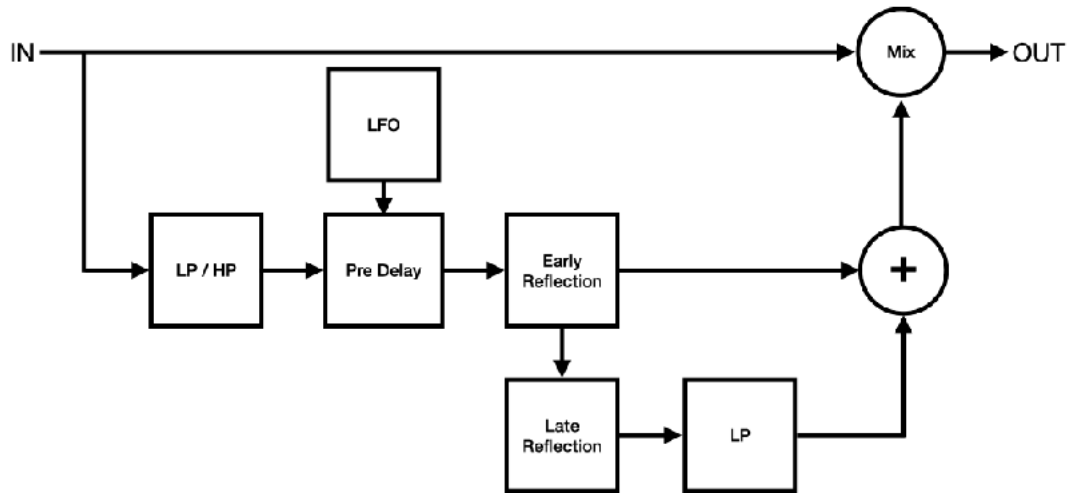

Input Filter

Use Lowpass filter and high-pass filter to attenuate high frequency and low frequency of the input signal.

Pre Delay

Use pre delay to adjust amount of the time between the direct signal and beginning of the early reflection signal. This parameter can be used to express size of the space. Reflection takes short time to bounce back in small room and it takes long time in large room. Also this parameter can be used to separate dry signal and reverb signal in the mix.

Modulation Speed

LFO Frequency dial controls speed of the modulation. When sync switch is turned on, LFO Frequency can be set as note value which is synchronized to the tempo. Valid range of the note value is automatically adjusted base on the current tempo.

Modulation Width

LFO Intensity dial controls width of the modulation and pre delay time dial controls center position of the modulation. Range of the LFO intensity is from 0 ms to +/- 10 ms.

Size and Decay

Size dial controls reverb time of late reflection and decay dial controls length of the reverb tail. Decay time can be used to express size of the space and material of the surface. Reflective materials, such as concrete or hardwood, gives longer decay time.

When auto size switch is turned on, size dial controls value of the parameters including size, pre delay, decay, damp, output LP frequency and early/late mix.

When sync switch is turned on in auto size mode, total reverb length, which can be controlled by pre delay, size and decay, is adjusted by note value which is synchronized to the tempo.

Damping

Damp dial controls amount of high frequency absorption for the late reflection signal. Low damping values produce brighter reverb sound and high damping values produces darker reverb sound.

Output Filter


Use lowpass filter to cut high frequency of the reverb signal.

Early / Late Mix

Adjust balance of the early reflection signal and late reflection signal from 0% (early reflection) to 100% (late reflection).


Equalizer

Low Shelving




Adjust frequency of the filter from 21 Hz to 1092 Hz.
Adjust gain from minus infinity to +12 dB
When gain is turned fully anti clock wise, the filer becomes high pass filter.

Mid Peak / Notch



Adjust frequency of the filter from 151 Hz to 2389 Hz.
Adjust gain from -14 dB to +14 dB
Bandwidth is fixed to one octave.

High Shelving




Adjust frequency of the filter from 296 Hz to 21096 Hz.
Adjust gain from minus infinity to +12 dB
When gain is turned fully anti clock wise, the filer becomes low pass filter.

Compressor

Overview

The compressor reduces dynamic range of audio signal. This is achieved by feedback topology as shown in the diagram below.

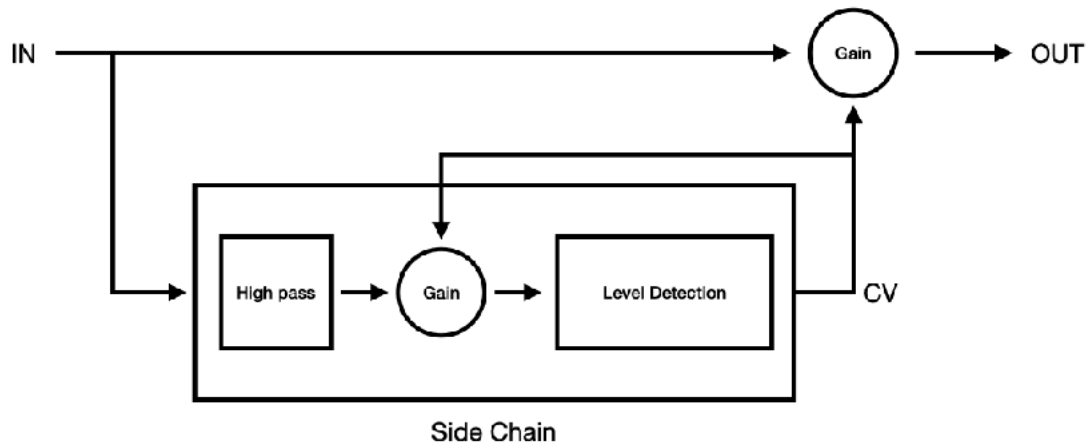


High pass filter is applied to the input of the side chain and the signal is routed to the gain stage in the side chain. The output of the gain stage is routed to the level detection. The level detector detects level of the input signal and generates control signal based on the level of the gain reduction required. The control signal is routed to the amplifier in the gain stage in the side chain to adjust level of the input signal from the high pass filter. The same control signal is also routed to the amplifier of the main gain stage to adjust level of the input signal.

The feedback topology is common in early analog compressors. Although there are several disadvantages to this topology, it is considered more musical than feed-forward design used in modern compressors. The feedback loop is implemented without unit delay to emulate behavior of the analog circuit.


Threshold and Ratio

When level of the input signal passes above the threshold, the input signal is compressed by the ratio.

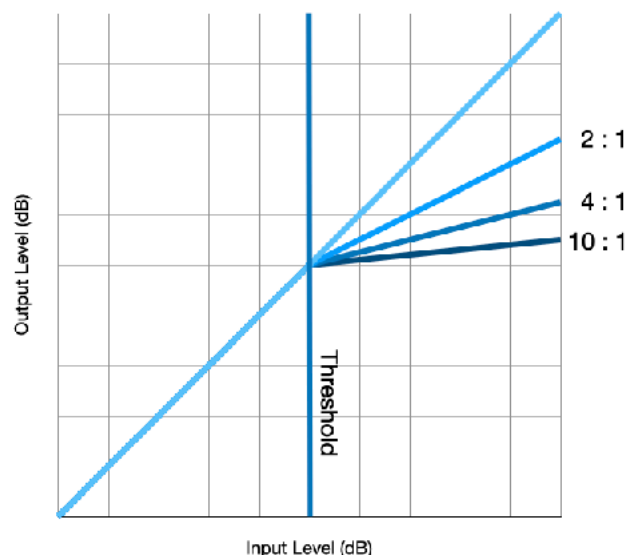


Attack and Release

Attack is the time it takes for the signal to be compressed by the given ratio. Release is the time it takes the gain reduction to return to zero.

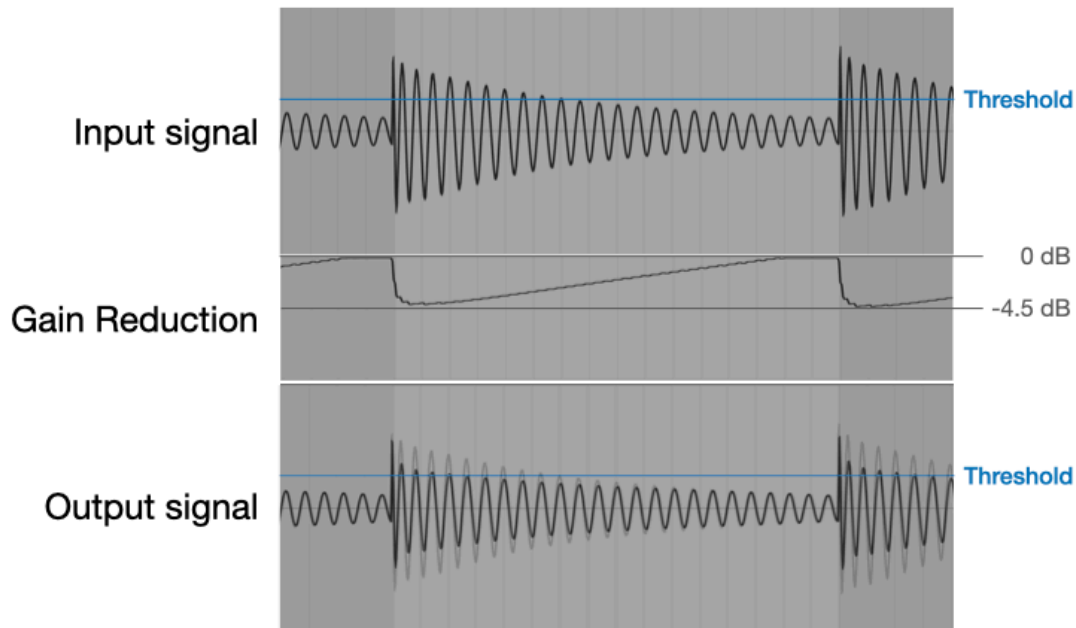


In this example, attack is 1 ms and release is 0.6 s. The initial transient pass through the compressor without gain reduction. It takes a while for the gain reduction to return to 0 dB after the input signal goes below the threshold.

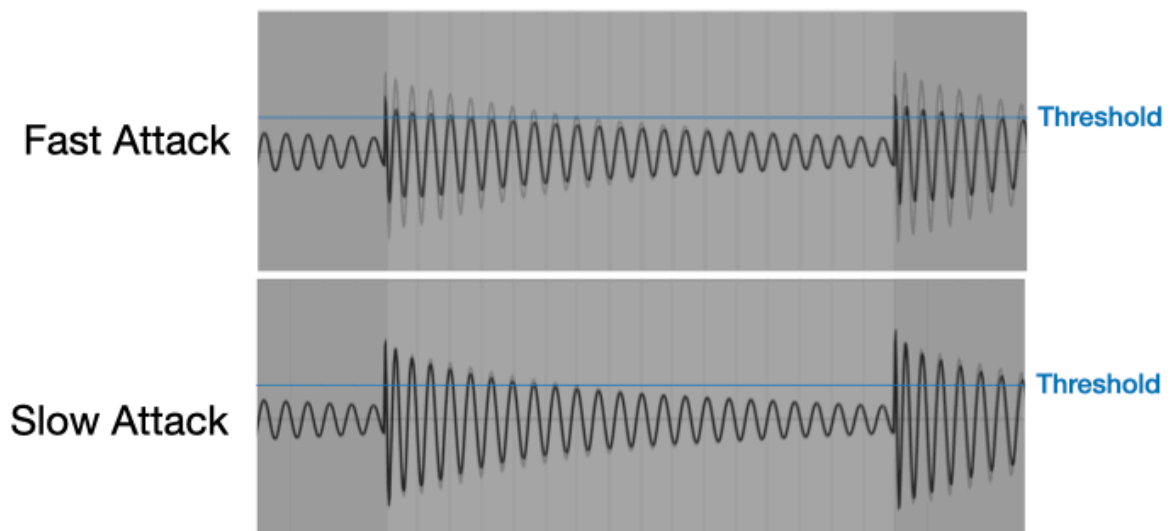

Fast attack makes compressor to start gain reduction immediately after the input signal passes above the threshold. Slow attack, on the other hand, allows many of the transients to pass through compressor without gain reduction.

The figures below illustrate characteristic of the attack and the release. 1KHz Sine wave is used as an input signal (shown as transparent background images). It shows how compressor reacts with various combination of the attack and release settings.

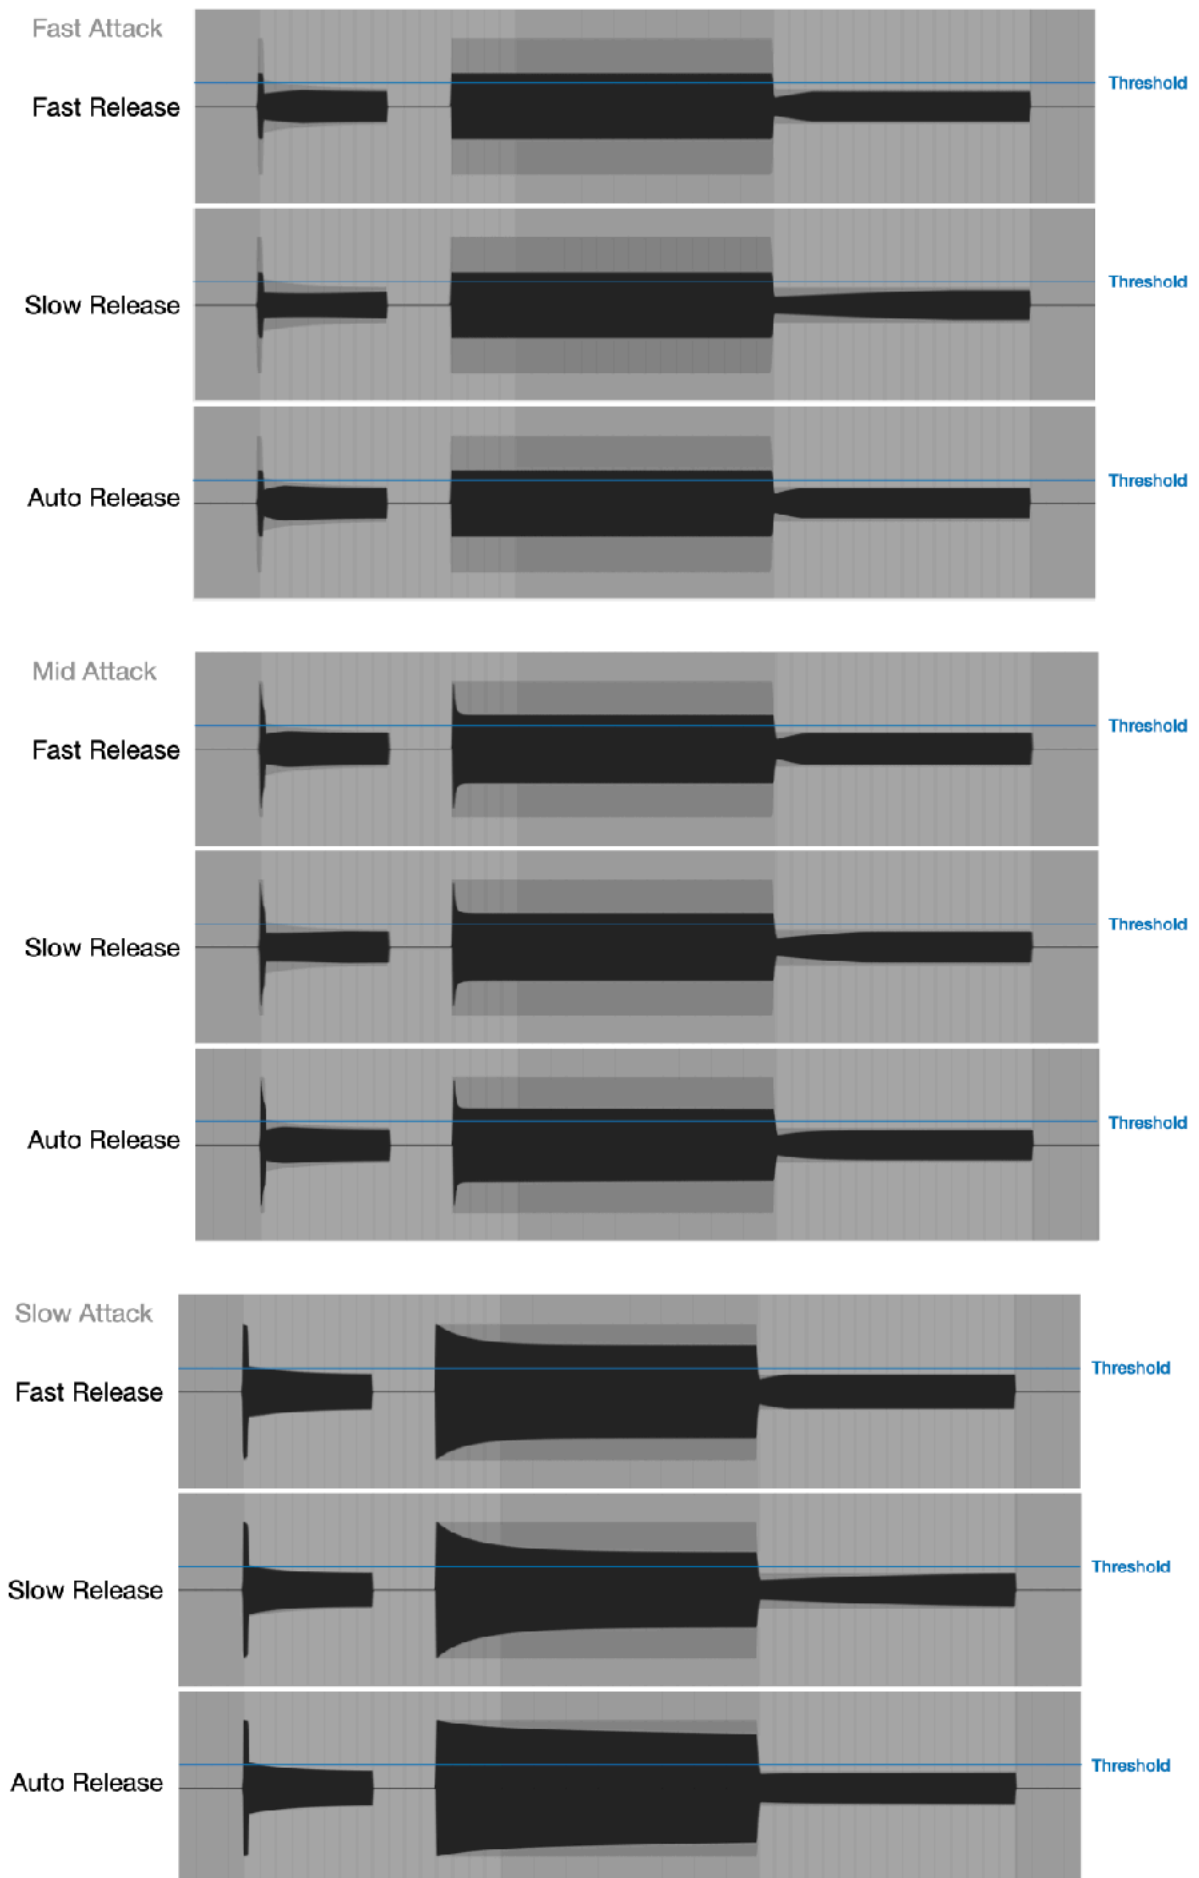

Auto Release uses two time constants for the peak detector. It will react differently for the short transients and the long sustained sound.

Fast attack reduces the level of the transients and make sound soft, slow attack allows transients to pass through and gives a punch to the sound.

Fast release causes pumping and breathing effects. Slow release continues to reduce level for a long period of time after compressing louder part of the sound.


Side Chain High Pass Filter

-6 dB / octave high pass filter is applied to the input signal of the side chain. Frequency range is from 20 Hz to 185 Hz. This filter removes low frequency information from the input signal for the level detector to control excessive gain reduction and pumping effect.

Makeup Gain


Use Makeup to compensate the gain reduced by the compressor. The range is from 0 dB to 20 dB. Gain reduction meters show the amount of the gain reduction. You can use the information to adjust level of the makeup gain.

Gain Reduction Meter

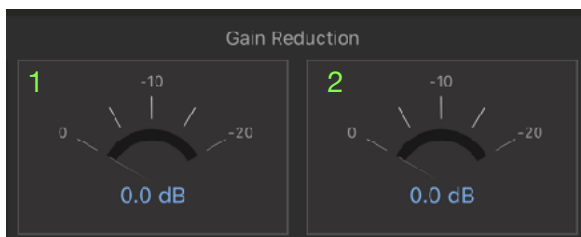

Gain reduction meters show peak level of the gain reductions in dB.

1. Gain reduction for the left channel
2. Gain reduction for the right channel

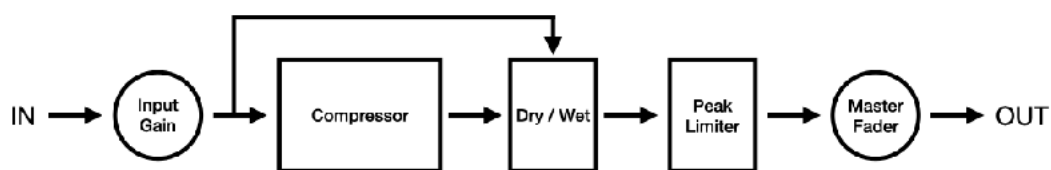

Input Gain

Adjust gain of the input signal routed to the compressor. The range is from -20 dB to 20 dB. When level of input signal is increased, GR meters show gain reductions even if threshold is set to 0 dB.


Dry / Wet

Use Dry / Wet to mix uncompressed signal (dry) and compressed signal (wet). Parallel compression technique, also known as New York compression can be achieved by adjusting amount of the wet signal mixed with the dry signal. When set to 0%, output is the dry signal. When set to 100%, output is the wet signal. When set to 50%, equal amount of the dry and the wet signal are mixed for the output.


Peak Limiter

Peak Limiter is an analog style limiter and provides clean sounding output signal. This limiter is not a lookahead brick wall limiter, so that it can't offer brick wall limiting. However it does not introduced any latency to the output signal.

Frequency response of the peak limiter is illustrated in the figure below. Output signal shows the result of 1 dB gain reduction.

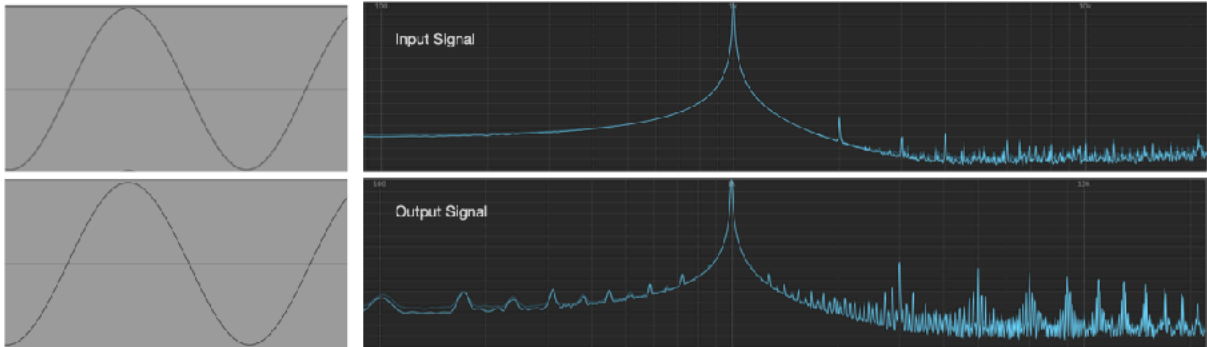

Keyboard

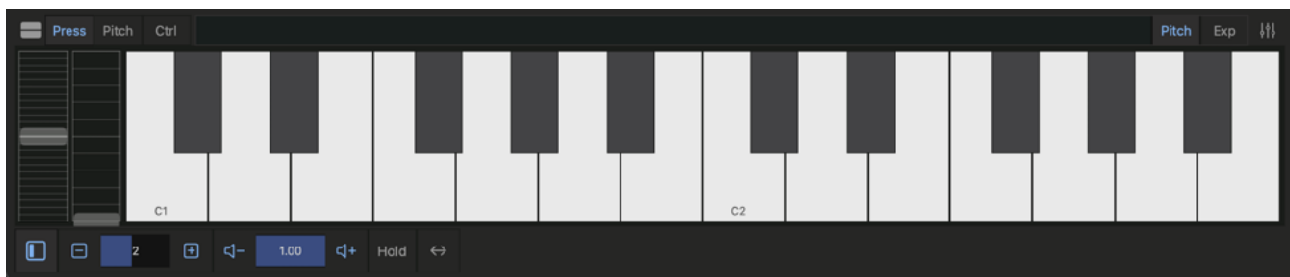


Select Keyboard




Tap keyboard button in tool bar to show keyboard.

Select Key Range

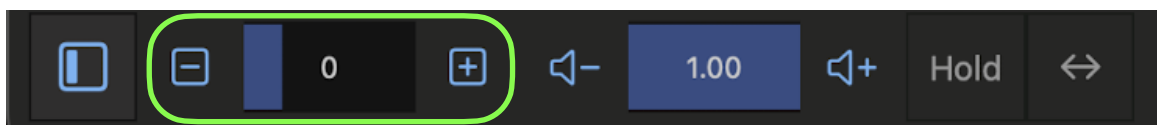


Use plus / minus buttons to adjust range of the keyboard. Indicator shows lowest note of the keyboard.

Use Modulation Wheel

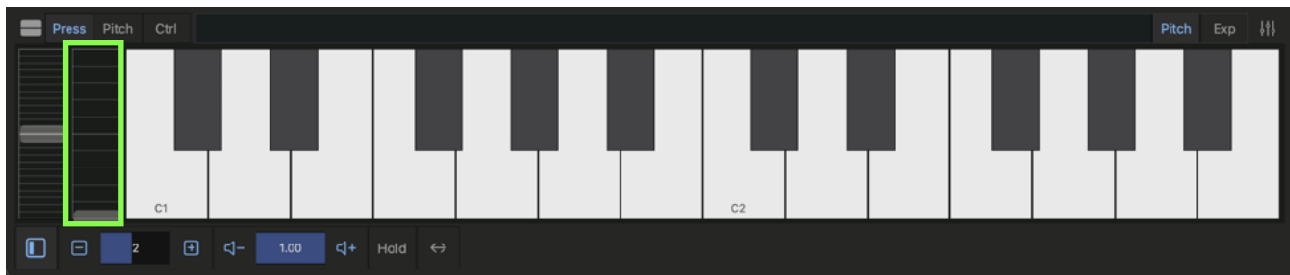

Adjust amount of the modulation when Mod Wheel is selected in modulation source.

Use Pitch Wheel

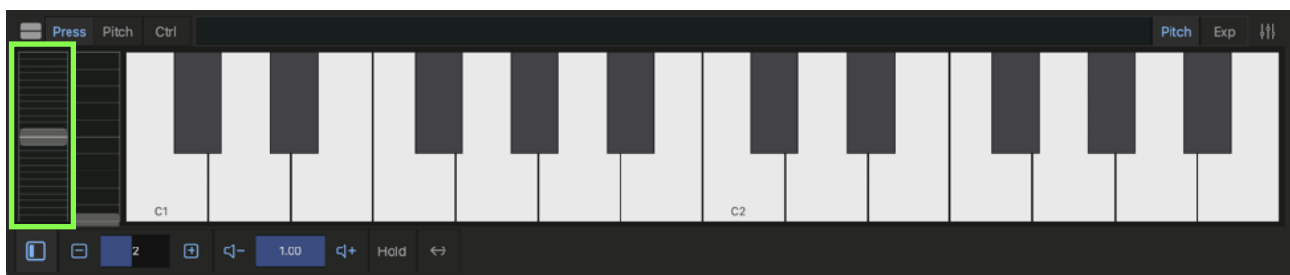


Adjust pitch of the oscillators. Range is plus / minus one octave.

Set Velocity




Use plus / minus buttons to adjust velocity.

Use Key Hold

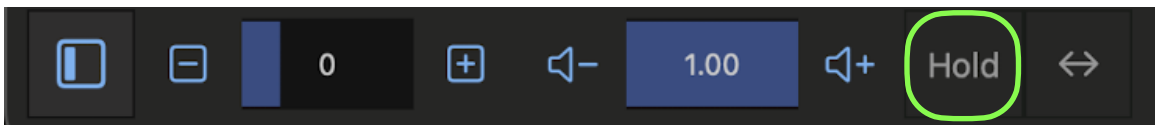


Tap to Enable/Disable Key Hold.

Show Double Keyboard



Tap this button to show Double Keyboard.

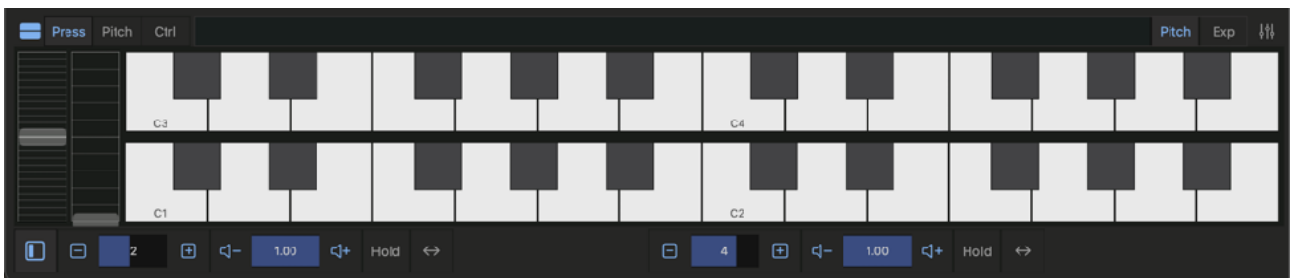

Select Per Note Control Targets




Select targets of Per Note Control. Apply the control by movement on Y axis of Key.

Scroll Keyboard



Tap this button to enable/disable keyboard scrolling.

Ribbon Controller

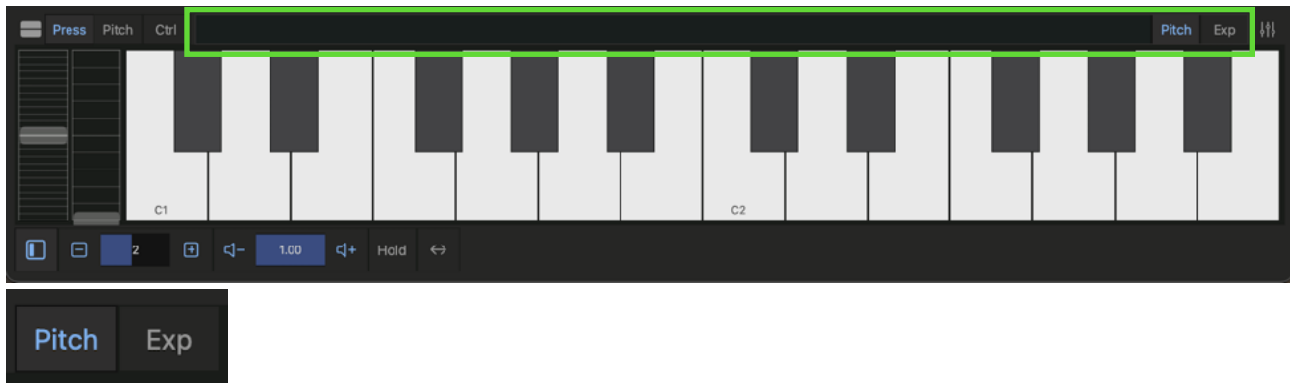

Select a targets of Ribbon Controller. When Pitch is selected, dragging the Ribbon Controller applies linear pitch bend. When Exp (Expression) is selected, expression is controlled by ribbon controller. Targets of the expression can be selected in KBD Control Routing Panel.

Assignable Controllers



Tap parameter button to show/hide assignable controllers.



Tap “Assign” button and tap on a selected control to assign the parameter to the control.


Global Offset Parameters for Performance

The following nine parameters, FM Ratio, FM Mod, FM Texture, Cutoff, Resonance, operator FM, operator AM, Cutoff Modulation and Pan Modulation, can offset values of target parameters. When set value of offset to zero, target parameters are back to the original values.

Macro Factory Presets

Five factory presets, GlobalOffset, ChannelStrip, Effects, VCF&VCA Mod and StepSeq, can be used to set parameters to Assignable Controllers.


Sequencer

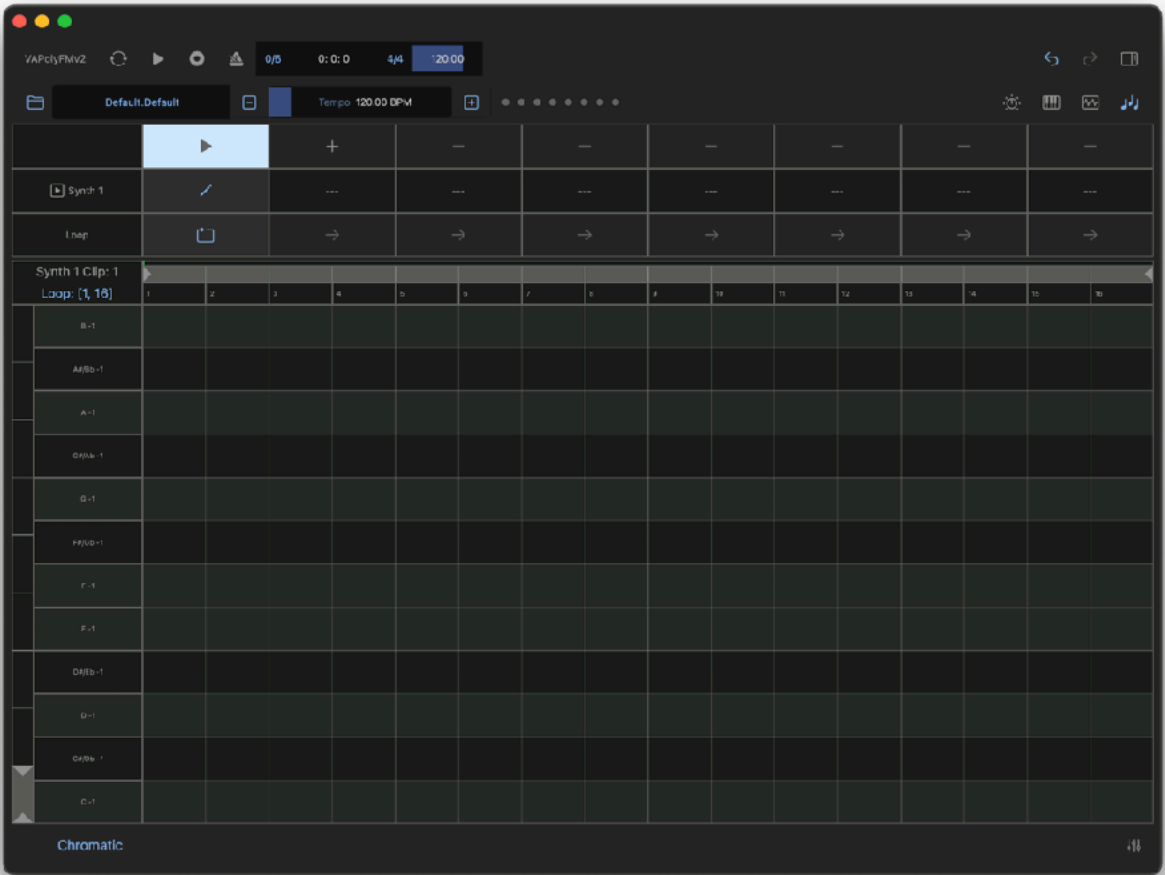

Clip Editor



Each clip contains note event and parameter automation events for length of 16 bars. Maximum number of clips are 8.

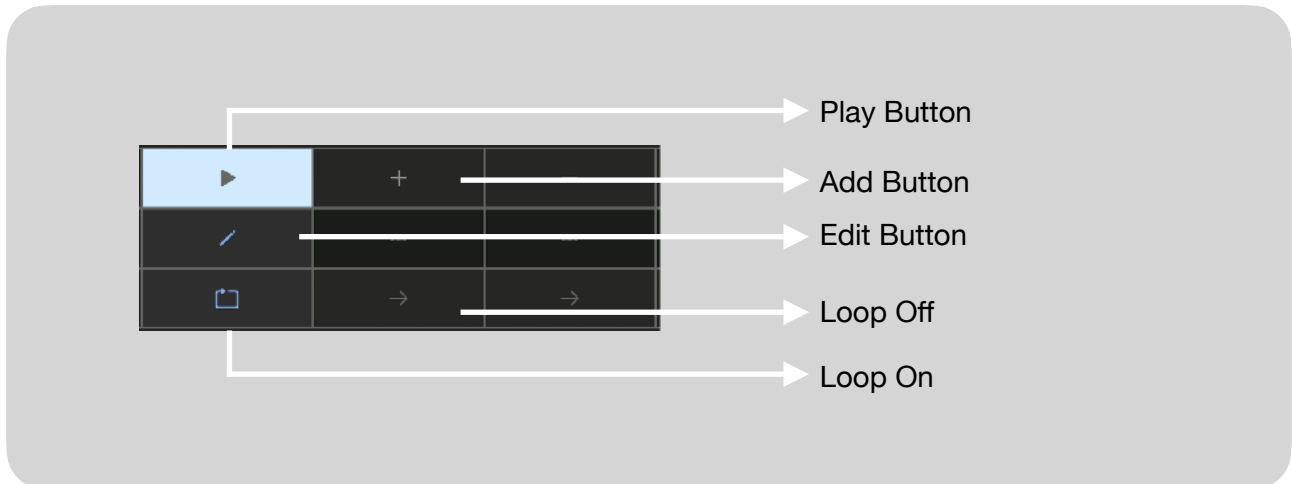

Load Clip

Tap load button to load clip to make it active.

Play/Stop Clip

Tap play button to play/stop clip.

Edit Piano Roll

Tap edit button to open piano roll editor.

Add edit button

Tap plus button to add edit button.


Set Loop Mode

Tap this button to enable/disable loop mode. When loop is off, tap square icon to select a clip to play next.

Auto Select Editor

Tap Synth Row Label to toggle Auto Select Editor Switch. When Auto Select is enabled, editor changes while playing sequence.

Piano Roll Editor

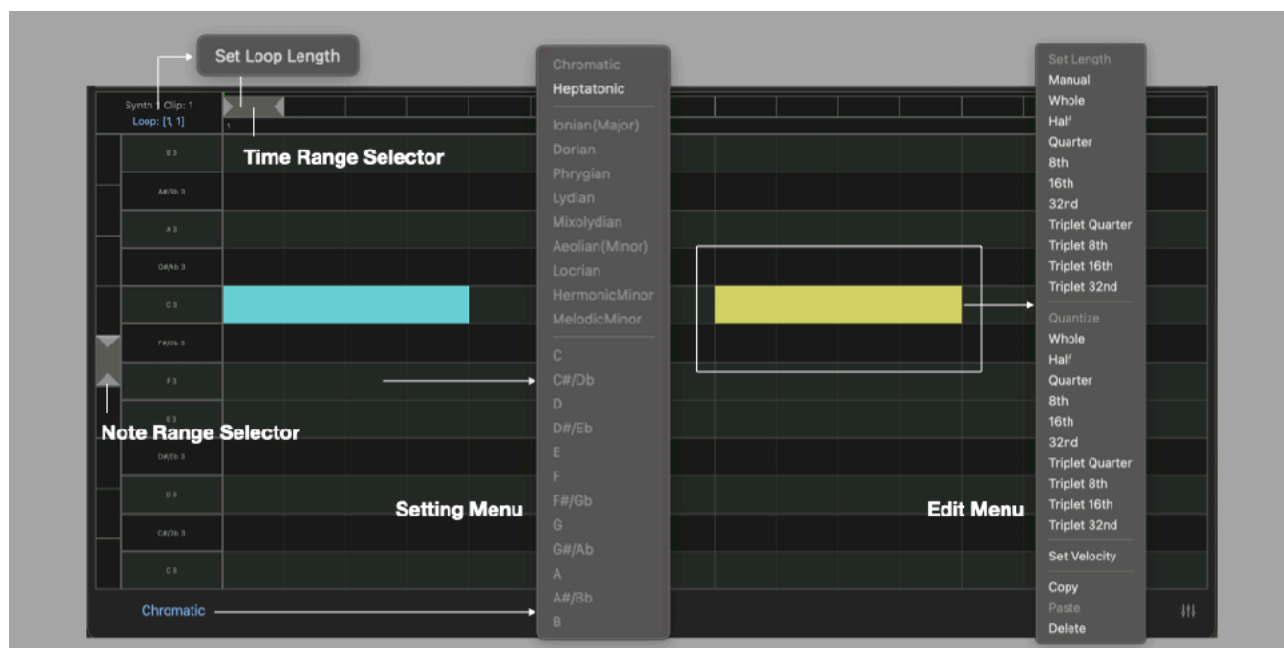

Select Time Range and Loop Length

Use “Time Range Selector” to select Time Range for editing and Loop Length. On iOS, pinch gesture control zooming and drag gesture control scroll position. To set Loop Length, tap on Loop Length button to show menu and select “Set Loop Length”. Right click on selector on Mac also show the menu.

Select Note Range

Use “Note Range Selector” to select note range for editing. On iOS, pinch gesture control zooming and drag gesture control scroll position.

Add Note

Double tap to add a note.

Delete Note

Select note and select Delete from context menu.

Scale Menu

Press and hold (right click on macOS) editor to show scale menu. Tap on scale button also shows the menu.

Edit Menu

Press and hold (right click on macOS) selected note to show edit menu.

Chromatic

Heptatonic

Ionian(Major)

Dorian

Phrygian

Lydian

Mixolydian

Aeolian(Minor)

Locrian

HermonicMinor

MelodicMinor

C

C#/Db

D

D#/Eb

E

F

F#/Gb

G

G#/Ab

A

A#/Bb

B

Chromatic Scale


Select Chromatic to edit notes in Chromatic Scale (12 tones).

Heptatonic Scale

Select Heptatonic to edit notes in Diatonic Scale, Harmonic Minor Scale or Melodic Minor Scale (7 degrees).

Root Key

Select a root key, when editing note in Diatonic Scale, Harmonica Minor or Melodic Minor Scale.

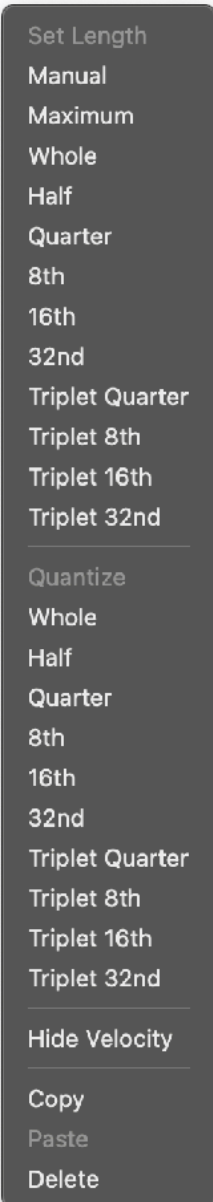

Set Length

Select an option to set note length.

Quantize

Select an option to quantize note.

Set Velocity

Open velocity editor to edit note velocity.

Copy

Copy selected notes.


Paste

Paste notes.

Delete


Delete selected notes.

Velocity Editor

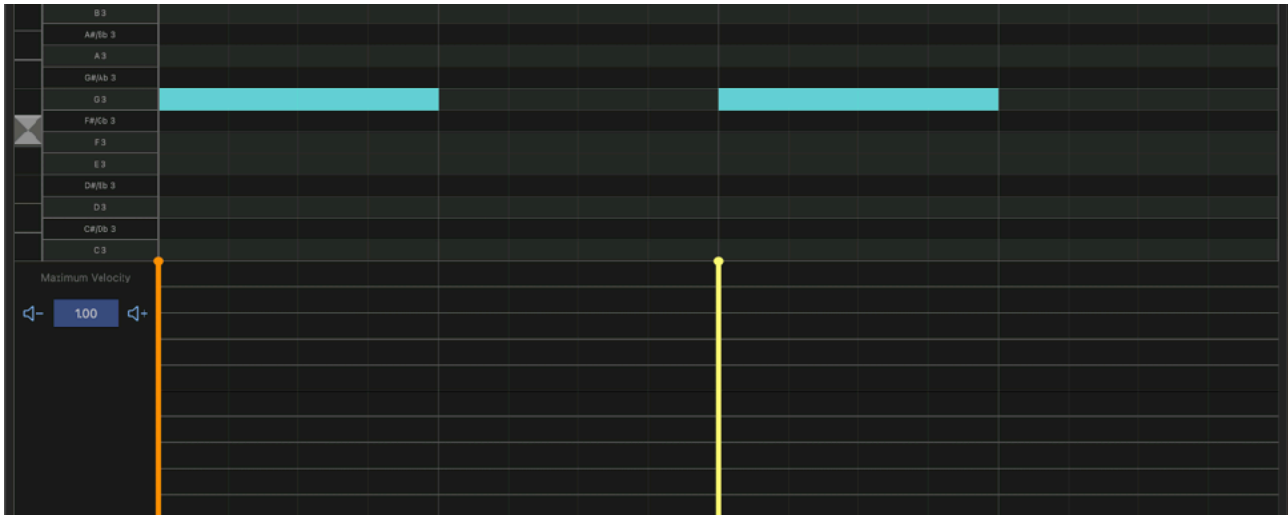


1. Select a note and open context menu.
2. Select "Set Velocity" in context menu
3. Select velocity sliders and adjust the velocity. Indicator in side bar shows maximum velocity in the selection. Maximum velocity value can be adjusted by plus and minus button and slider of the indicator.

Parameter Automation Editor

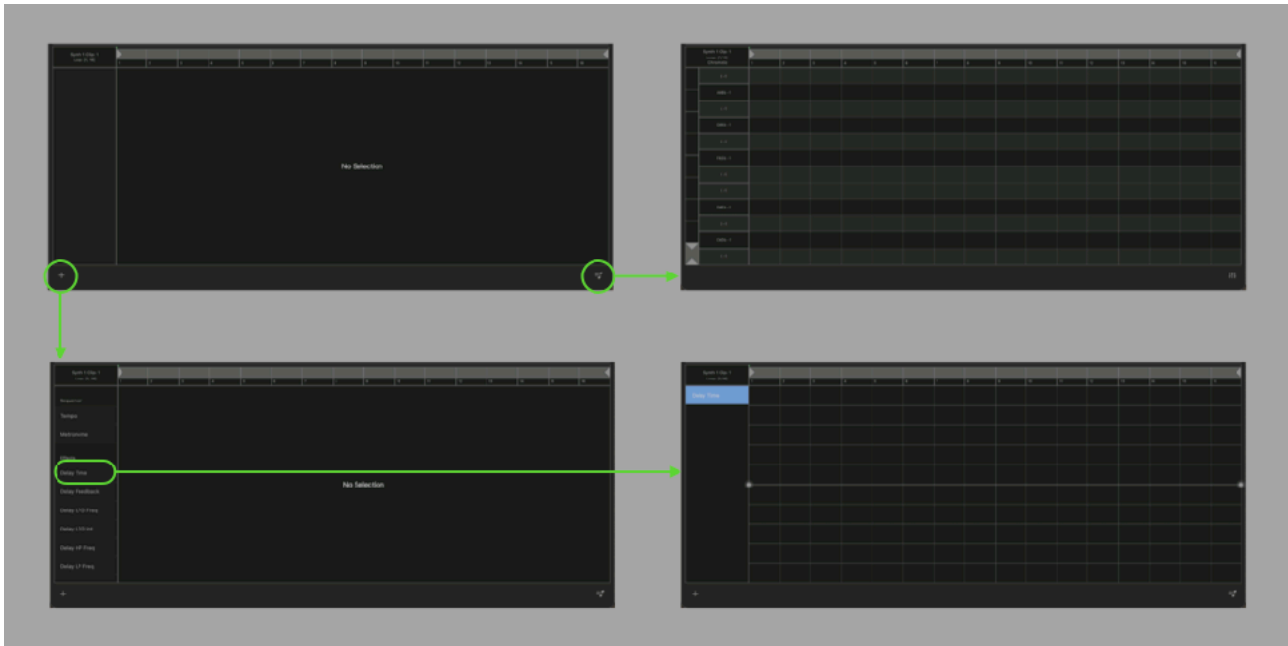

1. Tap plus button to show parameter list.
2. Select a parameter to edit.
3. Press and hold (right click on macOS) on parameter name to show context menu. Tap Delete to delete the parameter form editor.

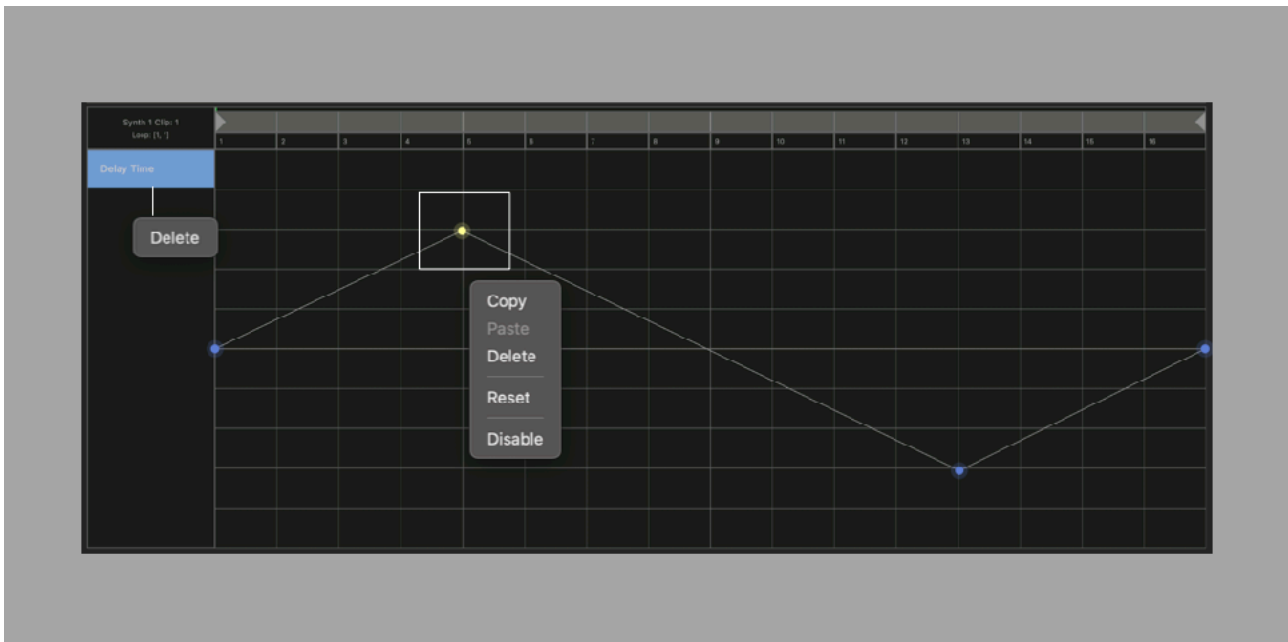

4. Double tap to add an edit point.
5. Select edit points and press and hold (right click on macOS) on editor to show context menu.
6. Select Reset from context menu to reset the parameter.
7. Select Disable to inactivate automation.

Play Sequence

1. Set host sync

Tap sync button in transport bar to enable / disable sync mode.

When sync mode is enabled,

Stand Alone

Sequencer is synced to the clock provided by container application. The container application can use Ableton Link to synchronized with the Link enabled devices. Use buttons in transport bar to play / stop sequence and change tempo.

Plugin

Sequencer is synced to the clock provided by the host application. Use transport switches of the host application to play / stop the sequence and change tempo.

When sync mode is disabled,

Sequencer is driven by internal clock. Use buttons in transport bar to play / stop the sequence and change tempo.

2. Set tempo

Tap plus / minus button at the tempo section in the transport bar to open tempo slider. Tempo can be adjusted by the plus / minus buttons and the tempo slider. Tempo slider can adjust tempo by range of plus/minus 20 BPM. Double tap on the slider set center position to the current tempo value. Alternatively tapping on tempo indicator allows you to type in tempo value by computer keyboard.

3. Set loop

Use Time Range Selector to set loop length.

4. Set swing

Tap swing button in transport bar to show swing menu. Select an option from the menu to apply the swing.

Swing Type	Delay time	Duration (Ratio)	Note
Swing 0/6	0 (no swing)	50%	Straight
Swing 1/6	1/6 of 16th note	54%	Soft swing
Swing 2/6	2/6 of 16th note	58%	Soft swing
Swing 3/6	3/6 of 16th note	62%	Soft swing
Swing 4/6	4/6 of 16th note	66%	Triplet swing
Swing 5/6	5/6 of 16th note	70%	Hard swing
Swing 6/6	16th note	75%	Dotted hard swing

Delay time is an amount of delay applied to the third 16th note when a beat is divided by four 16th notes.

Duration (ratio) is a ratio of duration from the first 16th note to the third 16th note when a beat is divided by four 16th notes.

Amount of delay for the notes in a beat changes proportionally.

5. Set metronome switch

Tap metronome button in transport bar to enable / disable metronome.

6. Play

Tap play / stop button in transport bar or transport switches of the host application to play / stop the sequence.

Record Sequence

1. Set recording mode

Tap record button in transport bar to enable recording mode.

2. Play sequence

Play the sequence by following the steps described above. Recording will start after count-in. When tap recording button while playing, recording start without count-in. To start recording without count-in, play sequence first then tap record button.

3. Record notes

Play keypads or MIDI keyboard to record notes. Notes are automatically quantized at 16 step position.

4. Record parameters automation

Before recording parameter values, use edit command “Reset to Dial Value” to reset values of the parameter to the rest position.

Turn a dial or switch to record the parameter values. The color of the control changes to green to indicate the parameter is recorded. The control won't move automatically until disabling the recording mode in order to move the control freely during the recording.

If the synth or the effects is not producing sound, parameter value will not be recorded.

5. Stop recording

Tap record button in transport bar to disable recording mode or tap play button to stop playback.

Preset

User Preset contains values of the synth parameters and the sequence data. When loading a user preset, value of the synth parameters and the sequence data are both changed. User Presets can be saved in iCloud Drive or in AUv3 plug-in on the device.


To save user preset in iCloud drive, select Save in File Menu. User Presets in iCloud Drive can be accessed from iPhone, iPad or Mac.

To save user preset in plug-in, tap Add button in Preset Browser. Plug-In Preset is stored on the device and can be accessed from any host application which support AUv3 User Preset.

Factory presets contains only values of parameters of the synth and the effects. It doesn't contain any sequence data. When loading the preset, it will change the value of the parameters but sequence data remains the same.

To load factory presets, select a preset in Preset Browser.

File Menu



New...

Reset parameters and sequence data.


Open...

Open a preset from iCloud drive.

Save

Save a preset in iCloud drive.

Preset Browser

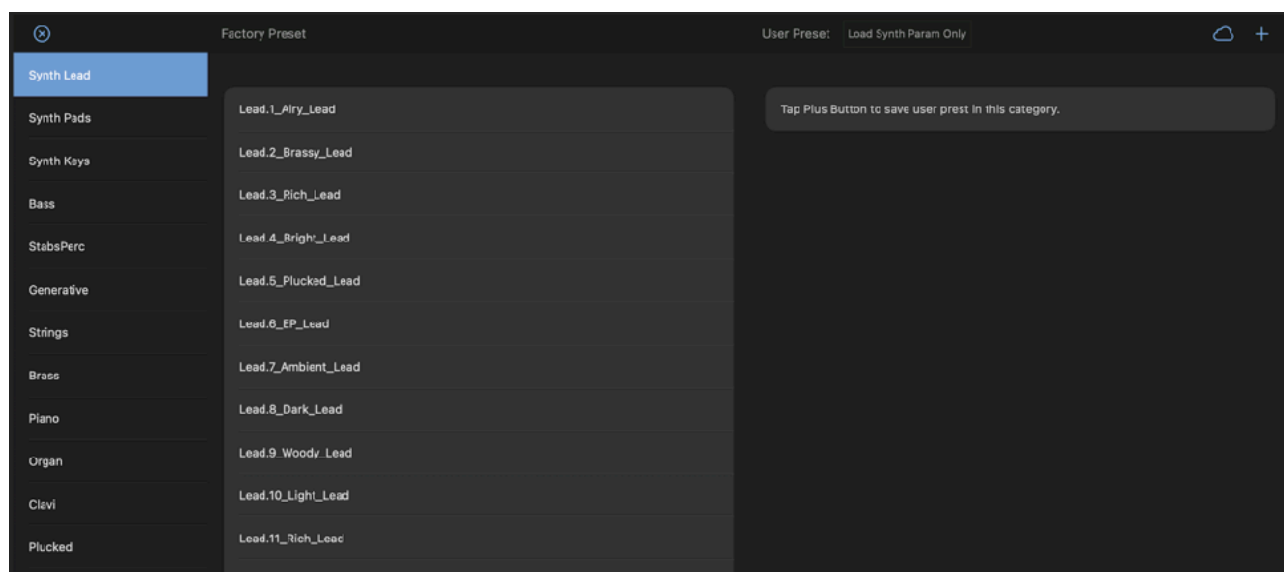

Load Factory Preset

Select a category from a list in the side bar. Tap on the name of the preset in Factory Preset Section to load.


Load User Preset

Select a category from a list in the side bar. Tap on the name of the preset in User Preset Section to load. If “Load Synth Param Only” is on, only synth parameters will be loaded. If the option is off, synth param and sequencer data will be loaded.

Delete User Preset

Tap and hold (right click on macOS) on the name of the preset in User Preset Section to show context menu and select Delete.

Save User Preset




Select a category from a list in the side bar. Tap on plus button to add a user preset.

Backup/Restore User Presets stored in the device




To back up or restore all user presets, tap on the iCloud icon to show export menu.



Select Export Presets to back up all of the user presets to iCloud.

Select Import Presets to import saved presets from iCloud.


Close File Browser



Tap on X icon to close the browser.

Setting Panel

General

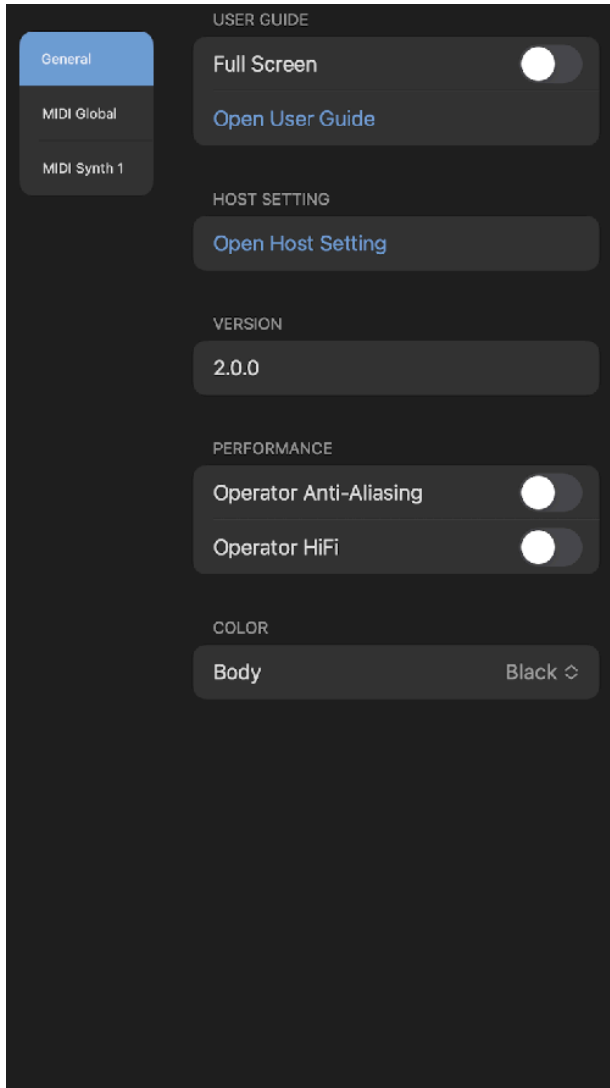

Full Screen

Enable this option to open User Guide in full screen (full window size on macOS).

Open User Guide

Tap this button to open User Guide

Open Host Setting

Tap this button to open Stand Alone Settings

Version

Indicate version number of the installed app.

Operator Anti-Aliasing

Turn on to enable Operator Anti-Aliasing. When it is enabled, usage of CPU is increased.


Operator HiFi

Turn on to enable HiFi Mode. When it is enabled, usage of CPU is increased.

Color

Select color. Options are black, navy and gray.

MIDI Global

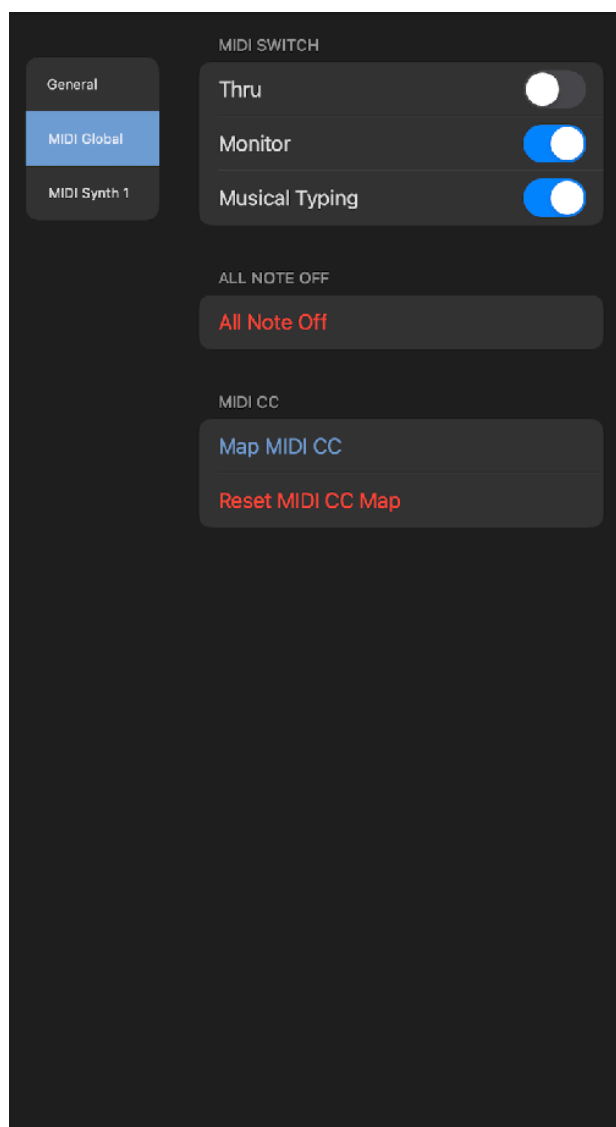

MIDI Thru

When MIDI thru is turned on, MIDI messages received in MIDI input will be send out from MIDI output. This setting is required when connected device's local switch is turned off.

MIDI Monitor

Enable / disable MIDI key input monitoring. Key Range of keyboard and sequencer is automatically adjusted based on the input note.

Musical Typing

Enable / disable computer keyboard to play MIDI notes.

All Notes Off

Send note off message to all notes.


Map MIDI CC

Open or Close Map MIDI CC view.

Reset MIDI CC Map

Remove all MIDI CC Map assignments.

MIDI Synth 1 & 2

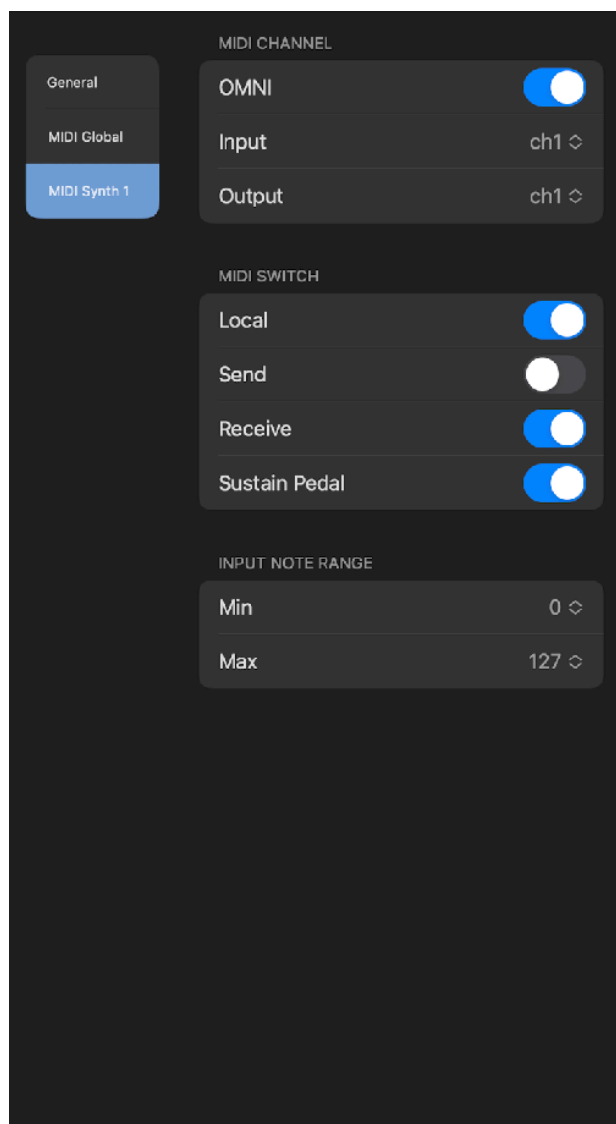

OMNI

Turn this on to connect all channel.

Input

Select input channel

Output

Select output channel

MIDI Local

When sending and receiving MIDI, connected device may send back the MIDI. This causes each notes to play twice. If this problem occurs, turn MIDI Local Switch OFF to disconnect User Interface from the audio engine.

MIDI Send

Enable / disable MIDI output.

MIDI Receive

Enable / disable MIDI input.

Sustain Pedal

Enable / disable to receive Damper Pedal message (MIDI CC #64).

Min


Set min value of MIDI note input.

Max

Set max value of MIDI note input.

Stand Alone Setting

AbletonLink

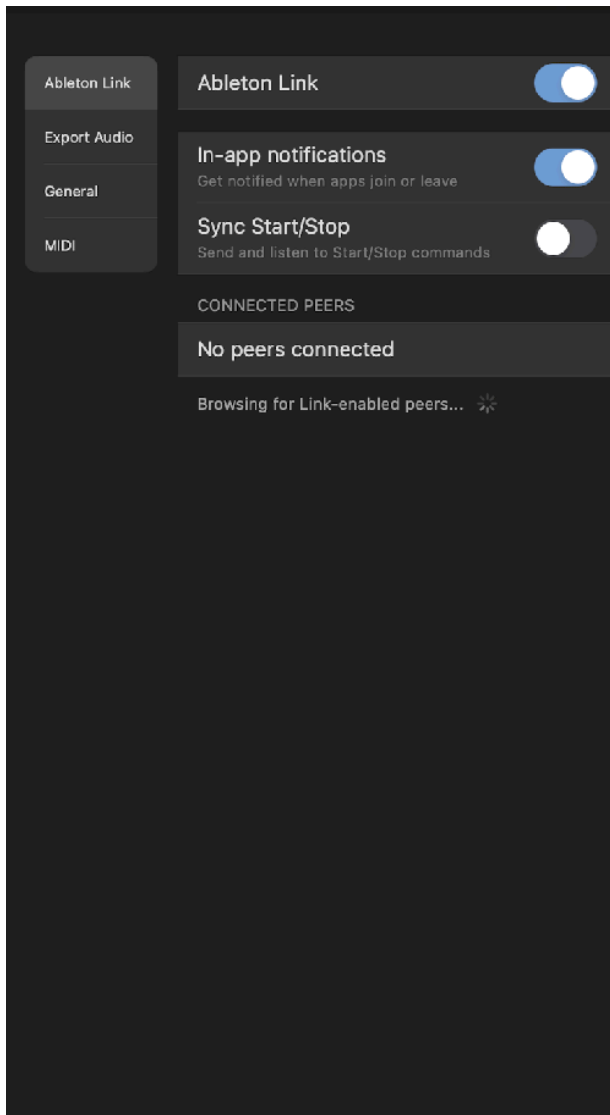

Ableton Link is a new technology that synchronizes beat, phase and tempo of Ableton Live and Link-enabled iOS apps over a wireless network. It lets you play devices together with the freedom of a live band. Anyone can start and stop their part while others keep playing, and anyone can adjust the tempo and the rest will follow. You can use Link to play with several instances of Ableton Live, with Live and iOS apps, or even without Live in your setup: using Link-enabled apps on multiple devices, or multiple apps on the same device.

Ableton Link

Switch on to enable Ableton Link.

In-app notification

Switch on to displays a message when an Ableton Link enabled app is connected.

Sync Start/Stop

Switch on to synchronize start and stop with connected apps.

Connected Apps

Indicate number of currently connected apps.

Ableton Link requires Wireless Local Network Connections. Your device and other Link-enable devices must be connected to the same local network.

Export Audio

FILE

export-2024-12-25-16-13-52

Location local

Documents/VAPolyMk3/Export/

LENGTH

Bar Length: 16 bars — +

AUDIO SETTING

File Type AIFF

Sample Rate 44100 Hz

Bit Depth 24 Bit

Cancel Export

Save As

Specify name of the audio file to export.

Location

Select location for the audio file to be stored. Options are Local or iCloud.

Length (Bars)

Length of the audio to be recorded. Specify the length by number of bars.

File Type

Select file type of the audio file. Options are AIFF, WAV, CAF and ACC.

Sample Rate

Select a sample rate of the audio file. Options are 44.1KHz, 48KHz, 88.2KHz and 96KHz.

Bit Depth

Specify bit depth of the audio file. Options are 16 bit, 24 bit and 32 bit.


Export

Tap export to export audio file.

Cancel

Tap cancel to return to the home page of the setting panel.

General

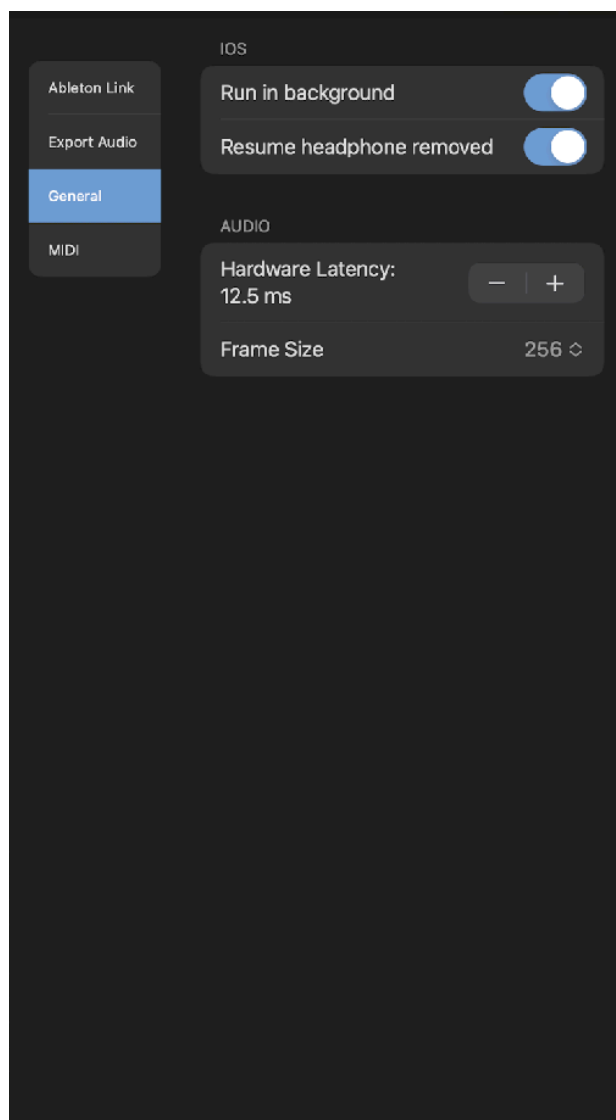

Run in Background

Turn this switch on to allow app to play continuously when the app enters in the background.

Resume Headphone Removed

Turn this switch on to allow app to play continuously when headphone is disconnected.

Hardware Latency

When Ableton Link is enabled, playback is synchronized to the Link-enabled devices. If there is a latency, output signal may not be aligned with the beginning of the each step.


In order to adjust the latency, set time in milliseconds in Hardware Latency. This value is used to compensate the latency of the output signal.

The latency varies on audio Interface and sample rate. Default value is 12.5 millisecond (sample rate is 44.1KHz)

Frame Size

Frame Size (Buffer Size) is a number of samples contained in an audio buffer. Higher frame size increases system performance but increases latency. Lower frame size decrease latency but decreases system performance. If you experience a problem with system performance, set higher frame size to improve the performance. Default setting is 256.

MIDI

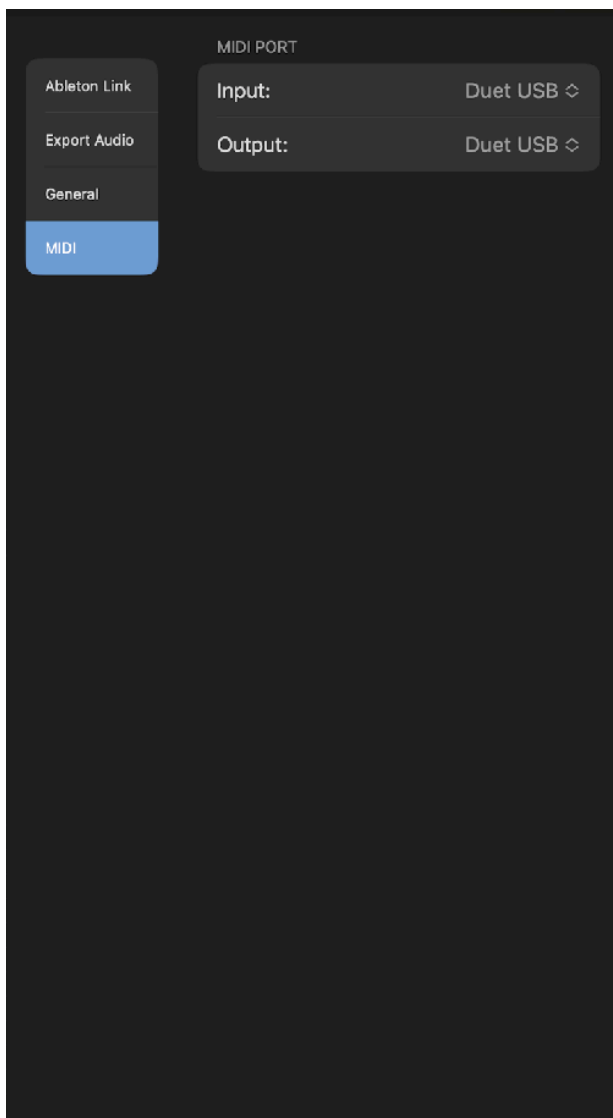

Input


Select MIDI input port

Output

Select MIDI output port


Bluetooth (BLE) MIDI

Central

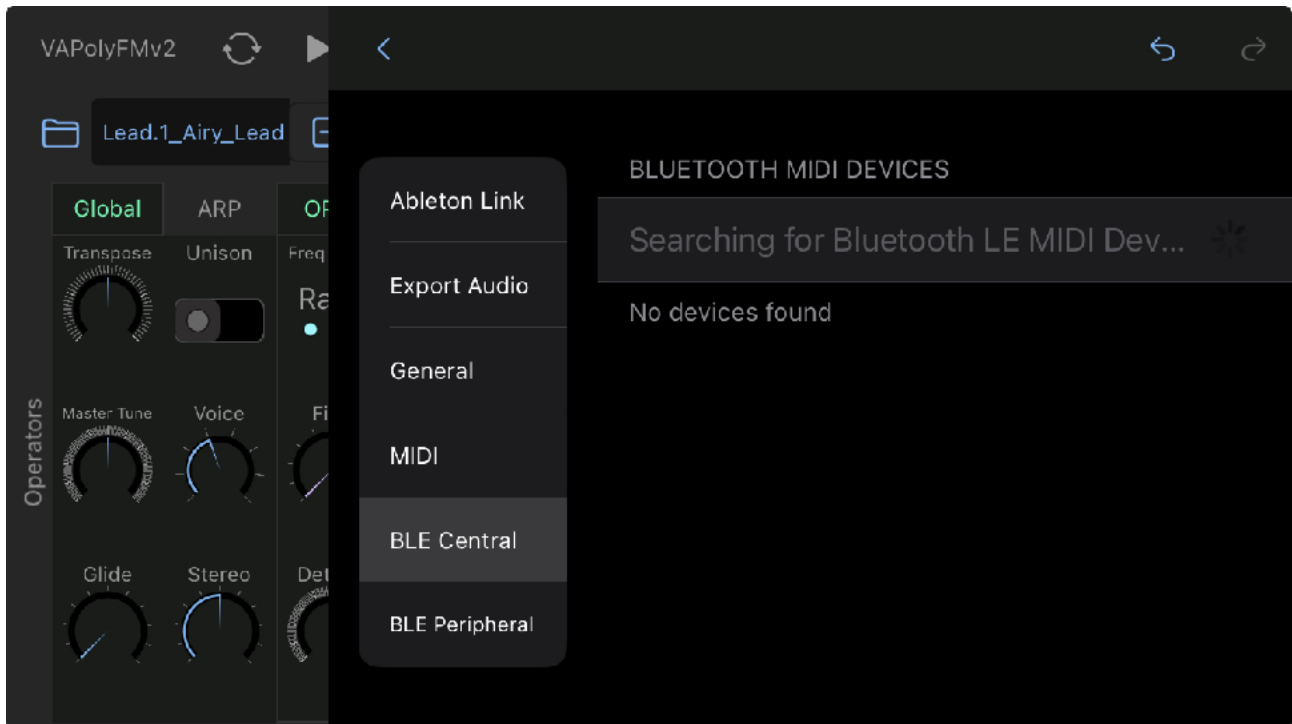

Open Bluetooth MIDI Central, which list available bluetooth devices. Select a name to connect to the device.

Peripheral

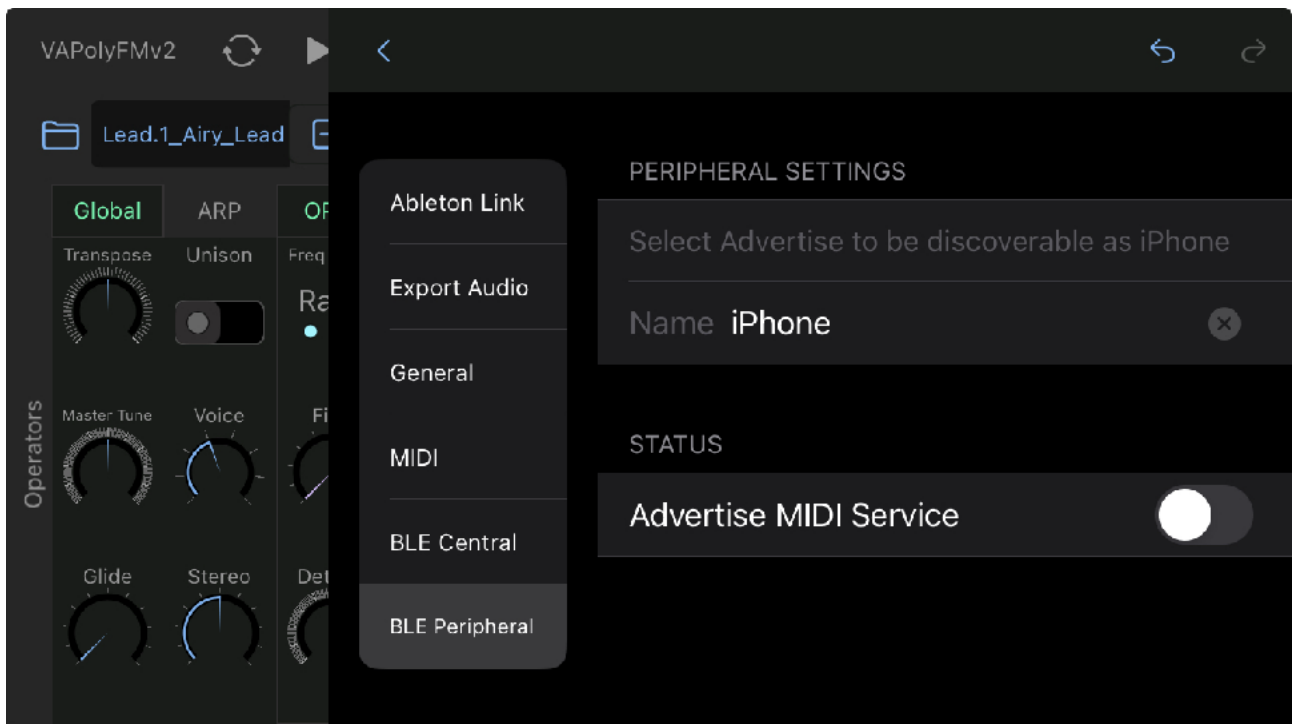

Open Bluetooth MIDI Peripheral. Turn Advertise MIDI Service switch on to makes the device to be discoverable from the other Bluetooth MIDI devices.

Export Audio

Prepare for exporting audio

1. Stop playback

Make sure the playback is stopped.

2. Select the first clip to play

Open clip editor and select a clip which should be played at first.

3. Turn off metronome

Make sure that metronome is turned off.

Adjust export settings

1. Save As

Type in file name if necessary.

2. Length

Set total length of the recordings by number of bars. This length should include the length of the delay or reverb tail.

3. Location

Select location to save the file. Options are local and iCloud.

4. File Type

Select a file type. Options for linear PCM format are AIFF, WAV or CAF. For compressed audio file, choose AAC. If the exported audio file is going to be edited in a different application, it is recommended to choose linear PCM format.

5. Sample Rate

Select sample rate. Options are 44.1KHz, 48KHz, 88.2KHz and 96KHz.

6. Bit Depth


Select bit depth. Options are 16 bit, 24 bit and 32 bit. Higher number results in better quality. If the exported file is going to be used in a different application, make sure that the which bit depth of the selected file type is supported by the application. (* 32 bit may not be supported in some applications).

Export Audio File

Tap export button to generate audio file and save the file in the specified location. When exporting the file is completed, browser can be open to audition the exported file.

Map MIDI CC

Tap “Map MIDI CC” in “MIDI Global” of the setting panel to show MIDI CC Map View. Use “Synth” button in tool bar to select a synth section or effects to map MIDI CC. Tap “Hide MIDI CC” in “MIDI Global” of setting panel to close MIDI CC Map View.

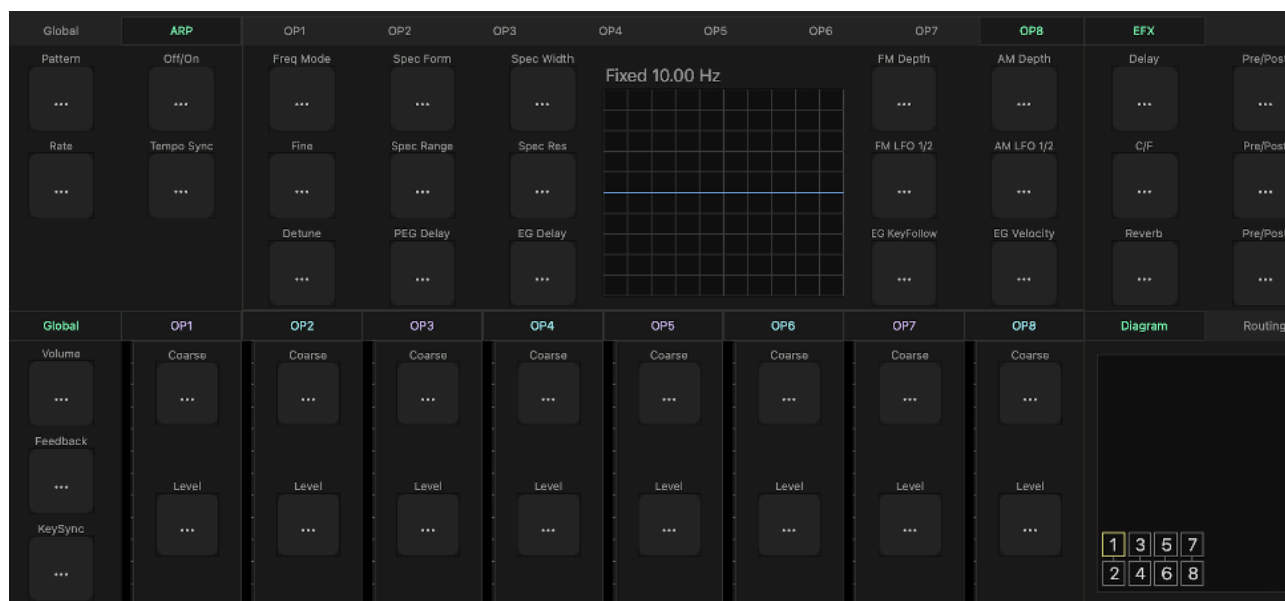

To make a MIDI CC (Continuous Controller) assignment, Tap a button then turn a knob on MIDI controller. The first MIDI CC number detected will be assigned to the parameter.

When CC is assigned, the button shows the CC number.

To cancel the assignment or to remove the mapping, tap the button.

To remove all assignments, select “Rest MIDI CC Map” in MIDI Global of the setting panel.

All the MIDI CC assignments are restored when app is launched in the next time.

Override Automation

When a parameter is controlled by MIDI controller, it is not possible to automatically override automation. To override, turn off automation switch of the parameter or turn the dial of the parameter on screen that will stop the automation and the parameter can be controlled freely by MIDI controller.

MIDI Program Change

Program Change is received as following.

Factory: Bank (CC#0) = 0, Sub (CC#32) = [0, 1], Program = [0, 127] => preset [0, 255]
 Plugin: Bank (CC#0) = 1, Sub (CC#32) = 0, Program = [0, 127] => Preset Number

Presets stored in iCloud Drive can't be selected by the MIDI program change.


Use External MIDI Keyboard with Stand Alone

1. Open host setting
2. Select MIDI from side bar menu. Set input MIDI port and output MIDI port.
3. Close host setting
4. Select MIDI Synth1 from side bar menu. Make sure “Receive” switch is turned on. Adjust channel and note range.
5. To stop hanging note, select MIDI Global from side bar menu, Tap on “All Note Off”.

Use MIDI Foot Pedal

CC#11 and CC#64 are supported for MIDI Foot Pedal. Targets of Expression can be selected in KBD Control Routing Panel. Sustain switch can be used to sustain currently played note.

Undo / Redo

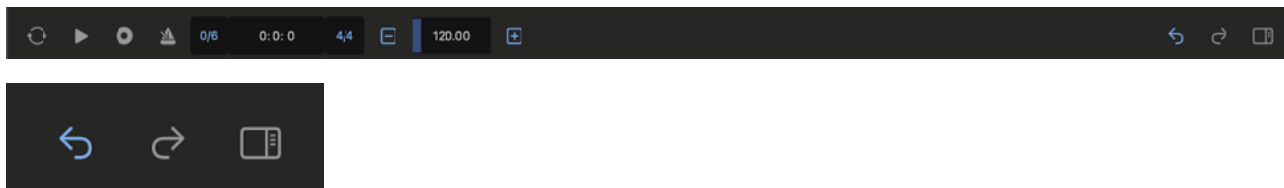

1. Tap Undo / Redo button. Tap Undo to undo previous operation. Tap Redo to redo previous undo operation.

* Some operation such as play, stop or record are excluded from undo / redo operation.

* On macOS, turn on “Musical Typing” to enable keyboard shortcut, command + z for undo and shift + command + z for redo.


macOS

Stand Alone on macOS supports menu bar, keyboard shortcuts, context menu and touch bar.
AUv3 plug-in on macOS supports keyboard shortcuts and context menu.

Menu Bar



Application

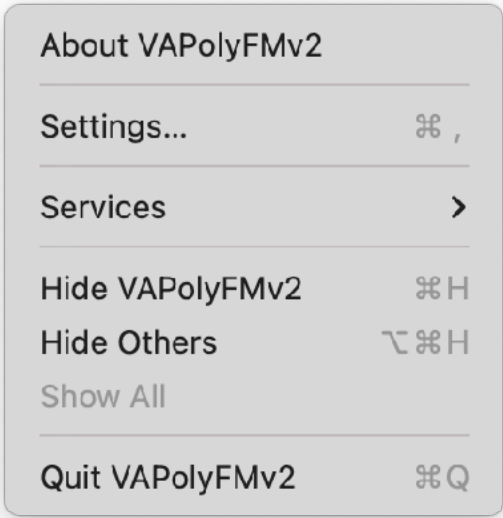


Open a window to display version information.

Open Preference window.

Quit this application.

File

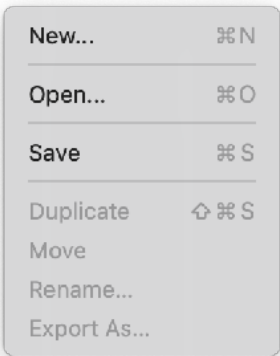


Reset all parameters and sequence data.

Open a preset from iCloud drive.


Save a preset to iCloud drive.

Edit

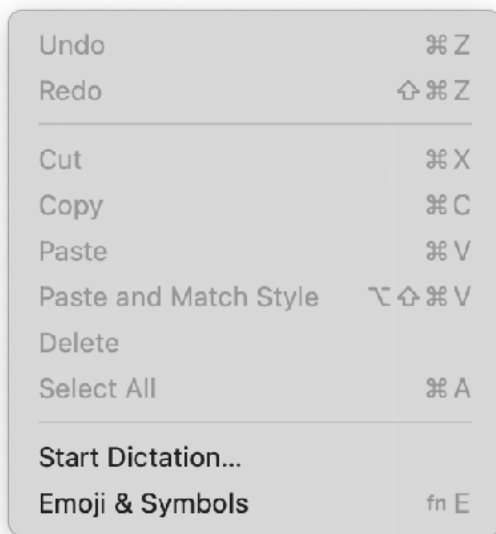


Edit Commands are enabled when typing text.

View




Enable/disable full screen mode.

Export




Open Export Audio Page in Setting Panel.


Window

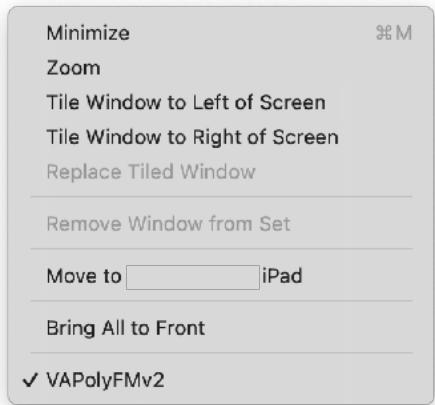

Help




Preference

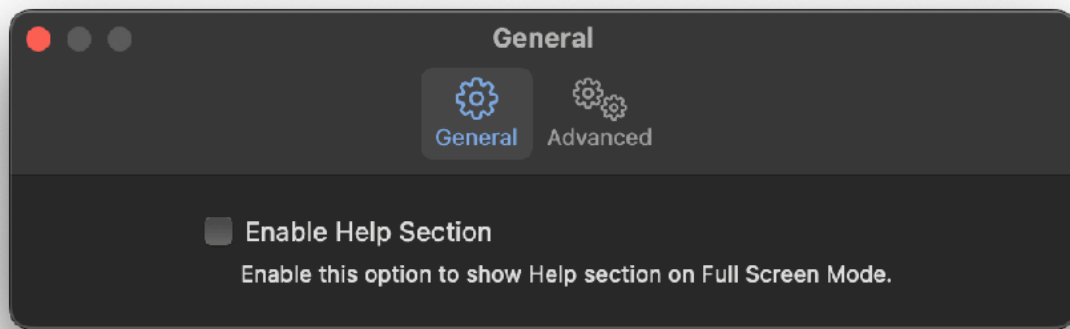

Enable Help Section


Enable this option to show Help Section on Full Screen Mode.

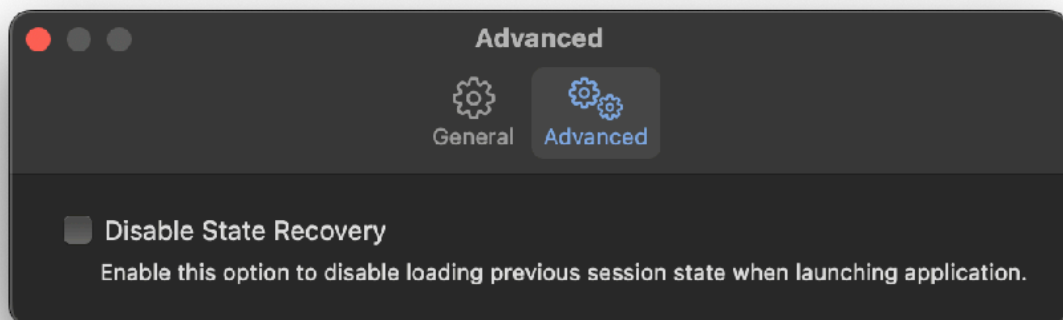

Disable State Recovery

When application is launched, state of the previous session is automatically loaded by default. Check this option to disable state recovery, so the application always start in default state.

Touch Bar (MacBook Pro)

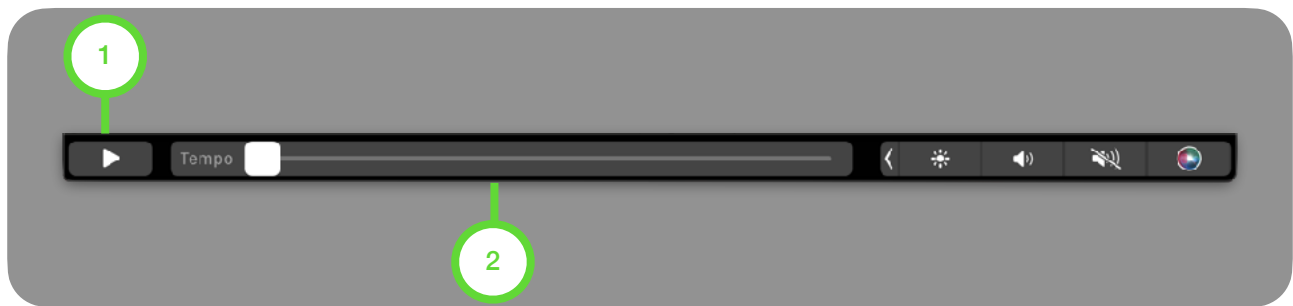

1. Play / Stop


Tap to play / stop sequencer

2. Tempo

Adjust tempo. Range of the slider is from 20 BPM to 240 BPM.

Use Computer Keyboard as MIDI Keyboard

Enable Musical Typing option in setting.

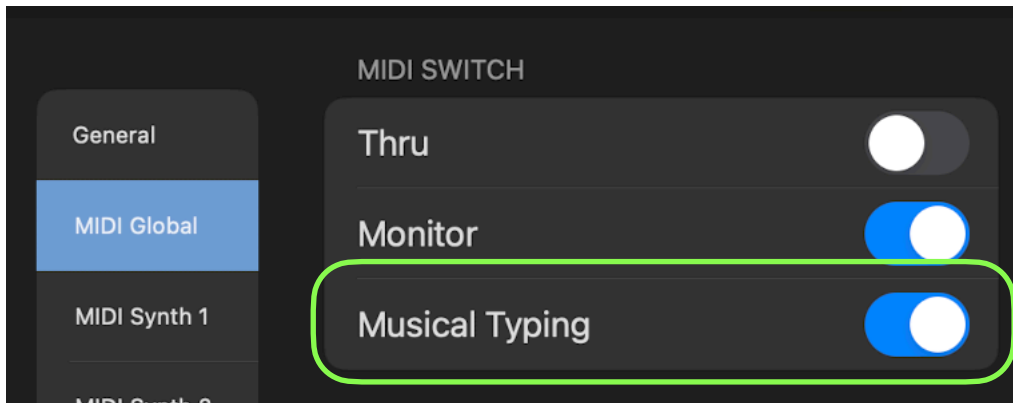

Keys are mapped as shown in the figure below.



Change Octave

[O-] Press Z key to select one octave below.
[O+] Press X key to select one octave above.

Change Velocity

[V-] Press C key to decrease velocity.
[V+] Press V key to increase velocity.

Set Timbral

[T1] Press B key to select Layer.
[T2] Press N key to select Synth1.
[T3] Press M key to select Synth2.

Keyboard Shortcut

Command	Key	AUv3	Note
New	Command-N	N/A	
Open	Command-O	N/A	
Save	Command-S	N/A	
Undo	Command-Z	✓	
Redo	Shift-Command-Z	✓	
Cut	Command-X	✓	Available for Text Input
Copy	Command-C	?	
Paste	Command-V	?	
Delete	Command-Delete	?	
Select All	Command-A	?	
Enter/Exit Full Screen	fn-F	N/A	
Play/Stop	Space	?	
Change Focus	Tab	?	
List Up	Arrow-Up	?	
List Down	Arrow-Down	?	
List Select	Enter	?	


? : (AUv3) Availability is depends on the host application, which can disable these functions.

* Some of the keyboard shortcut will be available in the future version update.


AUv3 on Apple Garage Band (Mac)

Load Plug-in


1. Launch GarageBand.
2. Choose a project dialogue window appears. Select a project and click on Choose.

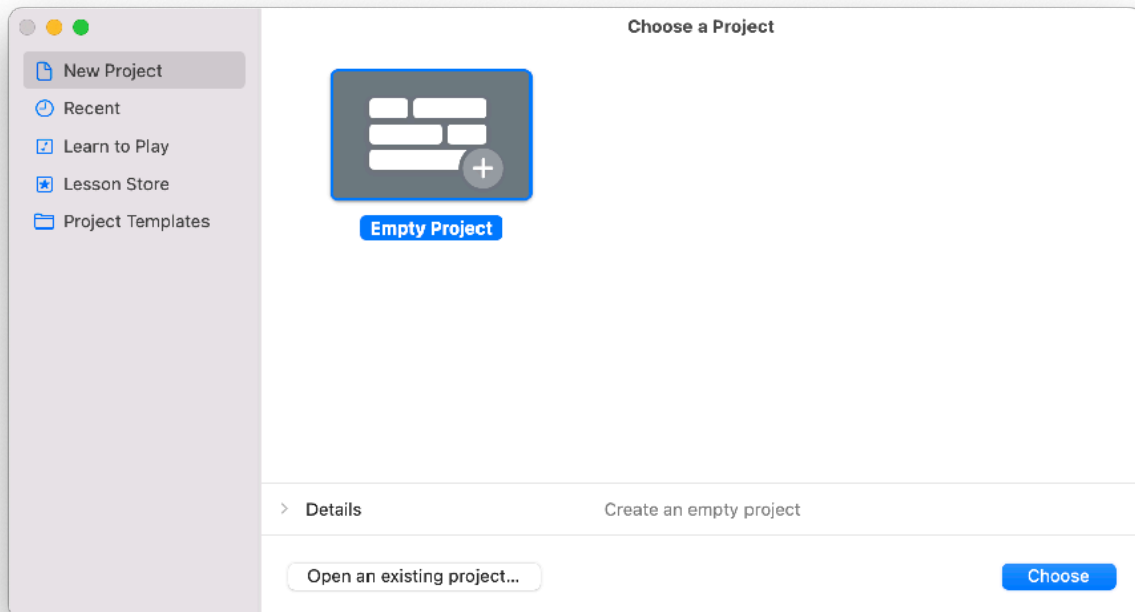


3. Choose a track type dialogue appears. Select Software Instrument and click Create.

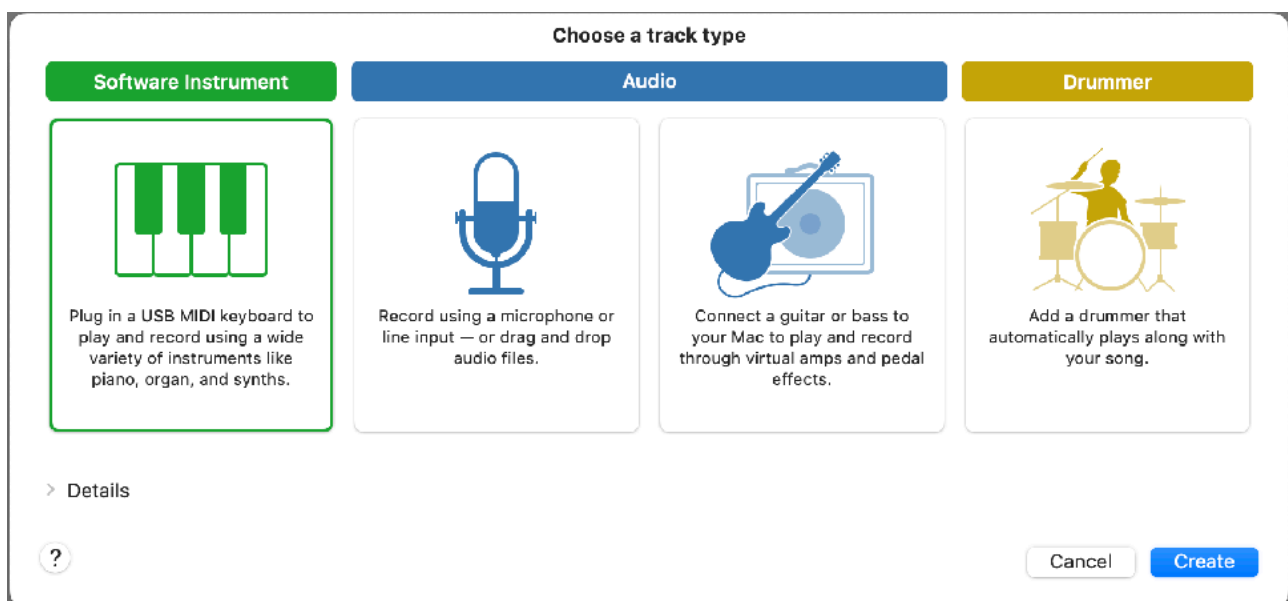


4. Click Plug-ins in Track Section.

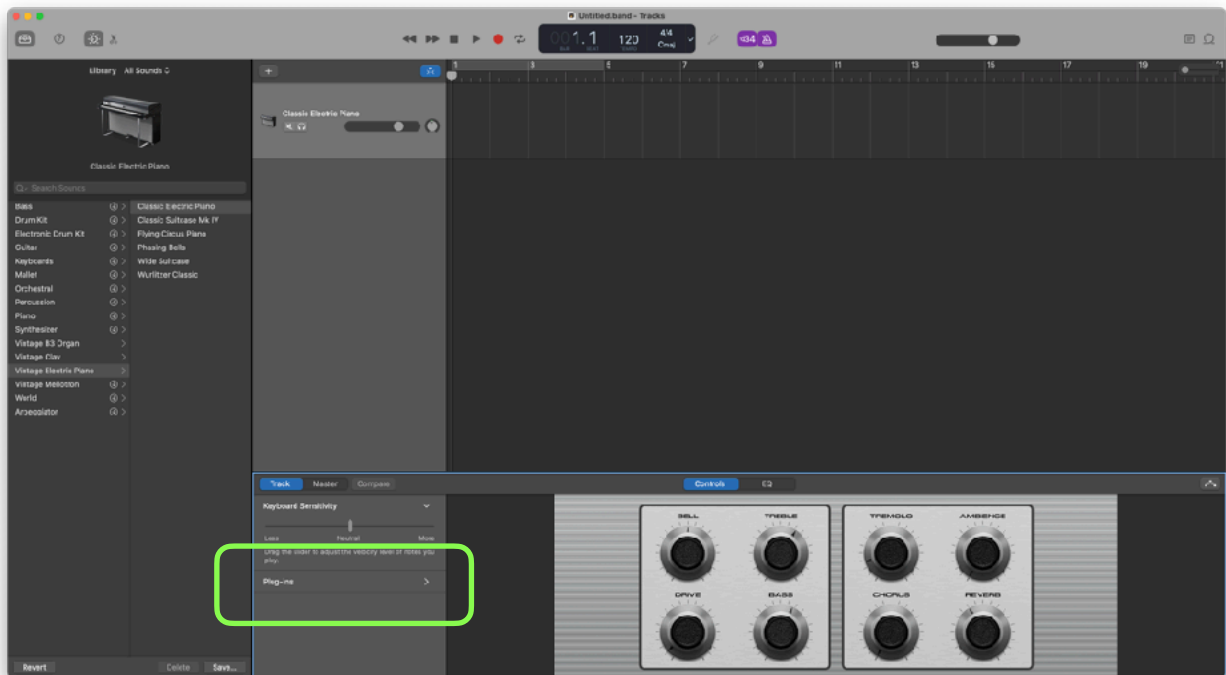


5. Click arrows at the right side of the blue button “E-Piano”.

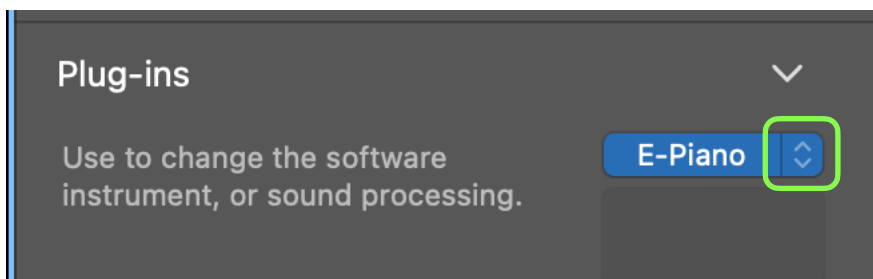

6. Select AU Instruments > RTMS > VAPolyFM

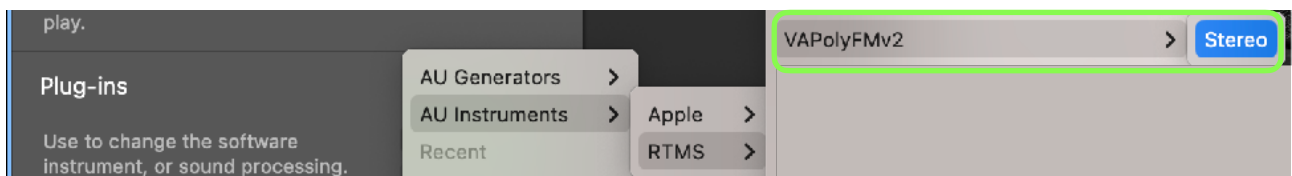

7. If plug-in window doesn't displayed. Tap blue button.

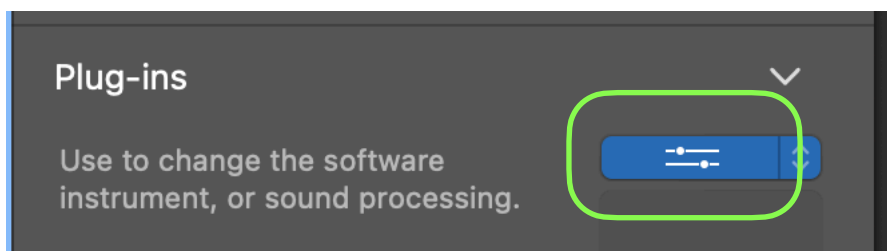

Activate Plug-In

After loading VAPolyFM or opening a project file, DSP engine of VAPolyFM may not be running.


In order to start the DSP engine, please do one of the followings.

- Press Play button on GarageBand.
- Play MIDI notes from GarageBand.

To play midi note by computer keyboard, select “Window > Show Musical Typing” from menu bar of the Garage Band. While the Musical Typing window is displayed, type A for note C.

Offline Renering

To start Offline Rendering on Apple Garage Band, select Cycle Range and select “Share > Export Song to Disk” from menu bar of the Garage Band. Selected Cycle Range will be rendered.

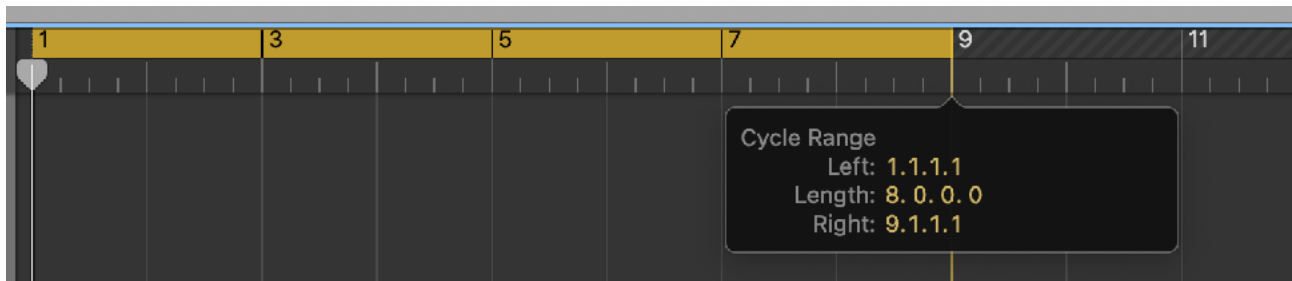

The followings are a few tips for offline rendering on Apple Garage Band.

- Make sure to save your project before performing offline rendering.
- Audition before initiating offline rendering. In order to perform offline rendering, DSP engine of VAPolyFM needs to be running. Please press play on GarageBand and make sure that DSP engine is running.
- If you are using clips, add an empty clip at the end and set the length to INF. Garage Band will stop rendering when audio level is dropped to inaudible level. This helps to record tail of the delay or reverb effect.


Known Limitations

- DSP Engine doesn't start until a user presses play button or play MIDI notes on GarageBand.
- Touch Bar shows blanc screen when showing button menu or context menu.
- GarageBand doesn't record MIDI notes from keyboards or sequencer of the VAPolyFM plugin.


AUv3 on Apple Garage Band (iOS)

Load Plug-in


1. Launch Garage Band
2. Create a new song

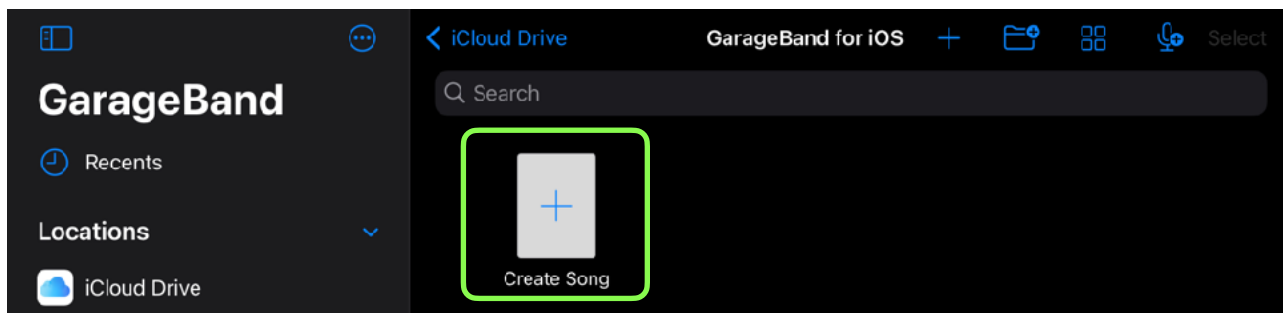

3. Select External > Audio Unit Extension

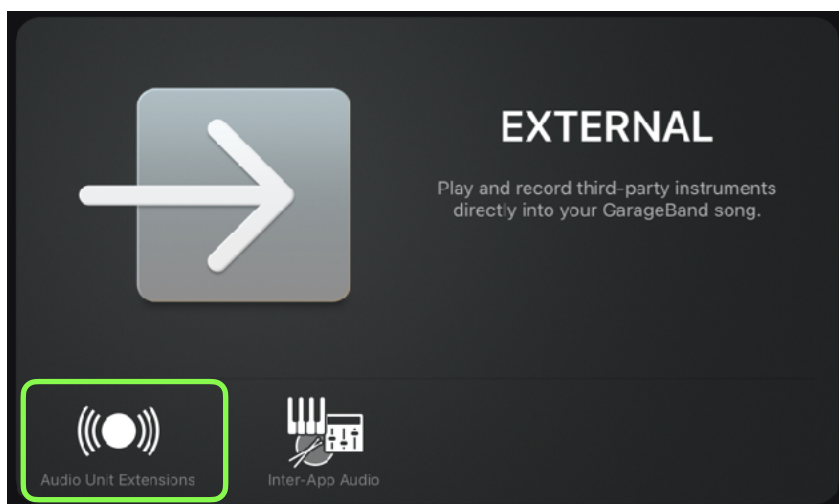

4. Select VAPolyFM

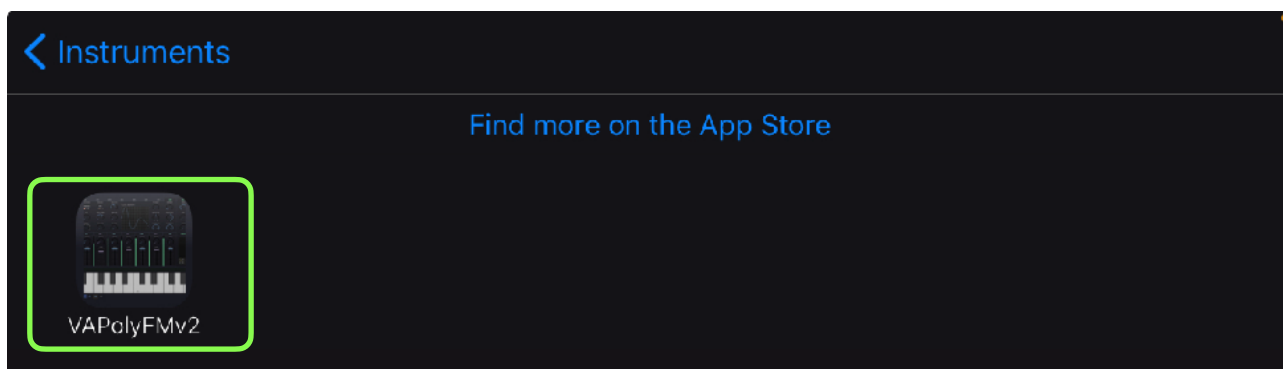

Change Plug-in Window Size

Tap arrow icon to resize the plug-in window.




Record Notes


Tap record button and play keyboard.



Edit Notes

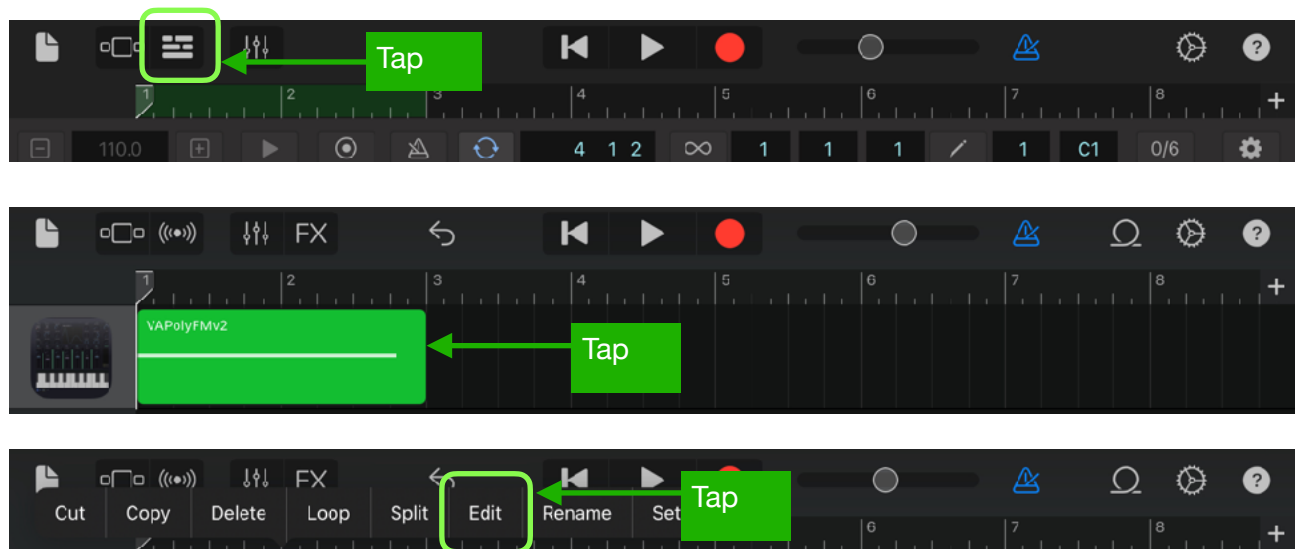


Select Edit from menu and edit notes. Tap “Done” to close the window.

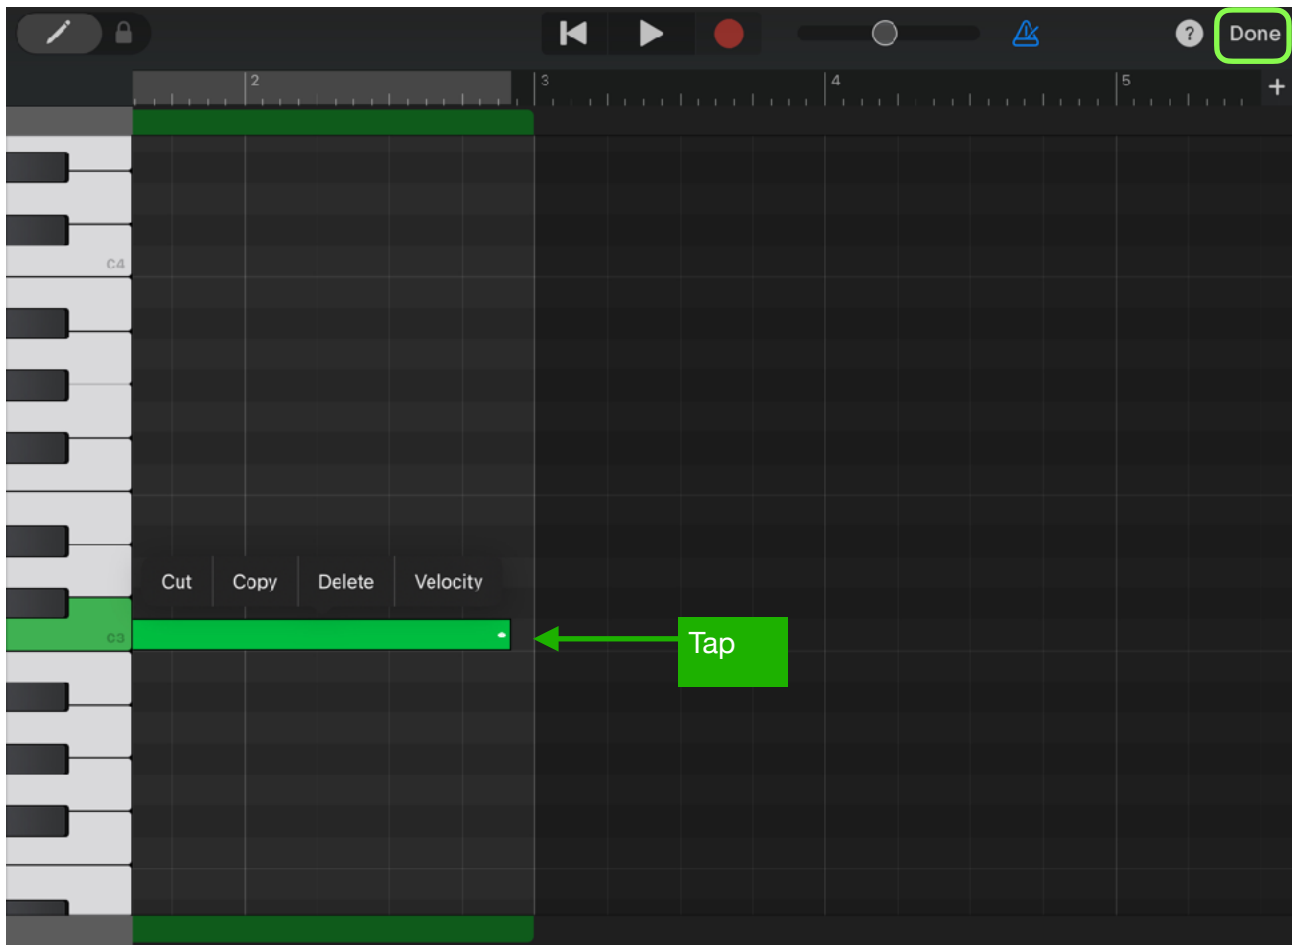


Save Project

Tap document icon to save the song.

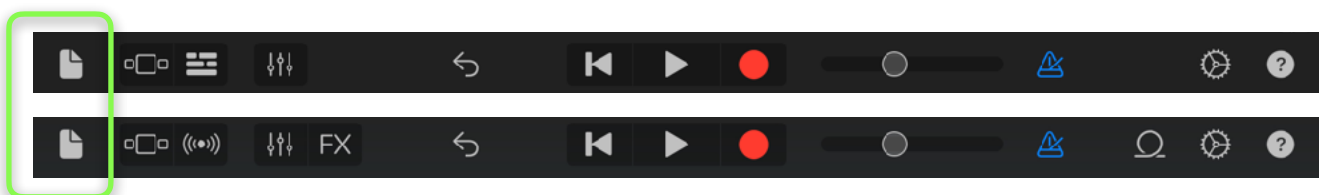


Host Sync

Tap Host Sync button to sync transport and tempo to host application.



To disable transport sync, tap and hold sync button and select “Disable Transport Sync” from menu.



System Interruptions (iOS)

It is important to aware that system may interrupt playback in the following situations. Please make sure to test and make a plan to handle the situations.

1. Incoming calls or activating Siri

When receiving an incoming call or when activating Siri, it interrupts playback and send App to background. In order to avoid it occurs, turn off the followings in the Setting App.

- Do Not Disturb > Do Not Disturb > turn on.
- Siri & Search > Listen for “Hey Siri” > turn off.
- Siri & Search > Press Home for “Siri” > turn off.

2. Connecting or disconnecting a headphone

Headphone output has own DAC³ and own sample rate. The sample rate may be different form the sample rate of the audio engine. What will happens when connecting or disconnecting a headphone depends on the sample rates.

If the sample rates are same, playback continues when headphone is connected. When headphone is unplugged, playback will stop. You can change this behavior by turn Resume when headphone is unplugged on in Settings.

If sample rates are different, when connecting headphone or when disconnecting headphone stops playback and system will re-configure audio engine for the new sample rate.

The sample rate of the audio engine is set by an application or an audio interface. For example, when connecting an iOS device to Mac using a cable that came with your device, Inter Device Audio and MIDI on macOS uses 44.1KHz but Quicktime player app on macOS uses 48KHz.

If you are planning to connecting or disconnecting headphone for monitoring during playback, please make sure to test and learn what will occurs.

3. Changing sample rate setting

As described above, if sample rate of the audio engine is changed for any reasons, playback stops.

4. Media Reset

Under rare circumstances, the system terminates and restarts its media services daemon. When it occurs playback stops.

5. Pressing the Home button or sending App to background

When app is sent to background by pressing home button, showing notification center or any other reasons, playback stops. You can change this behavior by turn Run in Background on in Settings.

Additional Settings

Followings are other settings in the Settings App which you may want to adjusted.

- Display & Brightness > Auto-Lock > set to Never
- Sounds > turn off all system sound
- Notifications > Show Previews > set to Never
- Home Screen & Dock > Multitasking > Gestures > turn off

If you have installed apps that may send you a notifications or may interrupt playback, make sure to adjust settings of the apps to disable the functions.

If you are using Ableton Link, make sure that Local Network in Privacy is turned on. If you are using Bluetooth MIDI, make sure that Bluetooth in Privacy is turned on.

³ Digital to Analog Converter

Specification

Synthesizer

- Polyphonic FM Synthesizer

FM Engine

- 8 Operators Modular Routing
- 4 Spectral Forms
- OP Amp Envelope: 5 stage, adjustable time and level for each stages.
- OP Pitch Envelope: 5 stage, adjustable time and level for each stages.
- OP Key Tracking
- OP FM Depth
- OP AM Depth
- Transpose: +/- 24 semi tones.
- Master Tune: +/- 50 cents
- Key Sync: On/Off

Filter

- Low pass filter: -12 dB per octave, -24 dB per octave
- High pass filter: -12 dB per octave
- Frequency modulation: ADSR, LFO, Key Follow

Amplifier

- Envelope: ADSR / Gate
- Amplitude modulation by LFO
- Pan modulation by LFO

LFO

- Wave shape: sine, saw, down saw, square, triangle, random
- Frequency Range: From 0.04Hz to 42.2Hz
- Amplitude modulation by ADSR envelope
- Polyphonic (LFO2)
- Frequency Modulation by ADSR envelope. (LFO2)

ADSR Envelope

- Attack time: From 1ms to 6 sec
- Decay time: From 1ms to 10 sec
- Sustain level: From 0 to 100%
- Release time: From 1ms to 10 sec
- Delay time: From 0ms to 10 sec
- Key Follow: From 100% to 25% (envelope length)

Controllers

- Modulation Wheel, Pitch Bend Wheel, Ribbon Control

Arpeggio

- Type: Up, Down, Up&Down. Random
- Frequency: From 1 Hz to 20 Hz

Portamento (Glide)

- Time: From 10 ms to 10 second

Step Sequencer (Analog Style)

- 8 Steps
- Sample & Hold
- Clock Frequency: From 1 Hz to 20 Hz

Sequencer (Piano Roll)

Steps: 16 steps per bar
Loop Length: from 1 bar to 16 bars
Clip: 8 clips
Tempo: from 20 BPM to 999 BPM
Host Sync: On and Off

Effects

Delay, Chorus, Flanger, Reverb, EQ and Compressor

Delay

Delay Time	Range from 20ms to 1200ms
Feedback	Range from 0% to 100%
Highpass Filter	Range from 20Hz to 500Hz
Lowpass Filter	Range from 1000Hz to 20000Hz
LFO Frequency	Range from 0.01Hz to 10Hz
LFO Intensity	Range from 0.0 to 1.0 (from 0ms to +/- 10ms)
Effect Switch	ON or OFF
Sync Switch	ON or OFF
Frequency Range	From 0Hz to 22.05KHz (effect)

Chorus / Flanger

Delay Time	Range from 1ms to 40ms (chorus), from 1ms to 13ms / 20ms (flanger)
Feedback	Range from 0% to 100% (flanger)
Highpass Filter	Range from 20Hz to 500Hz
Lowpass Filter	Range from 1000Hz to 20000Hz
LFO Frequency	Range from 0.01Hz to 10Hz
LFO Intensity	Range from 0.0 to 1.0 Chorus: from 0ms to +/- 1ms Flanger: from 0ms to 12ms / 19ms / 39ms
Effect Switch	ON or OFF
Sync Switch	ON or OFF
Effect Selector	Chorus or Flanger
Frequency Range	From 0Hz to 22.05KHz (effect)

Reverb

Input lowpass filter	Range from 1KHz to 20KHz
Input high-pass filter	Range from 20Hz to 500Hz
LFO Frequency	Range from 0.01Hz to 10Hz
LFO Intensity	Range from 0.0 to 1.0
Pre Delay	Range from 1ms to 100ms
Size	Range from 0% to 100%
Auto Size Mode	ON or OFF
Decay	Range from 0% to 100%
Damp	Range from 0% to 100%
Output Lowpass Filter	Range from 1KHz to 20KHz
Early/Late Mix	Range from 0% to 100%
Tempo Sync	ON or OFF
Effect Switch	ON or OFF

Equalizer

Low Shelving	Frequency Range	Range from 21Hz to 1092Hz
	Gain	Range from -INF to +12dB
	High Pass Filter response	12dB / Oct
Mid Peak / Notch	Frequency Range	Range from 151Hz to 2389Hz
	Gain	Range from -14dB to +14dB
	Bandwidth	1 octave
High Shelving	Frequency Range	Range from 296Hz to 21096Hz
	Gain	Range from -INF to +12dB
	Low Pass Filter response	12dB / Oct

Compressor

Input Gain	Range from -20dB to 20dB
Input High Pass Frequency	Range from 20Hz to 185Hz
Threshold	Range from -40dB to 0dB
Makeup Gain	Range from 0dB to 20dB
Ratio	2, 4, 10
Attack	0.01ms, 0.1ms, 0.3ms, 1ms, 3ms, 10ms, 30ms
Release	0.1s, 0.3s, 0.6s, 1.2s, Auto
Dry / Wet	Range from 0% to 100%

*Appearance and specification of the product are subject to change without notice.

Release Notes

What's new in version 2.0

- Version 2.0 contains bug fixes and improvements.
- Support MIDI Foot Pedal (CC#11, CC#64)
- Support MIDI2.0 Per Note Control Messages
- MIDI CC Settings are saved. It will be recovered when the app launched in the next time.
- UI Color can be selected from black, navy or gray.
- Added various features.

What's new in version 2.0.1

- This version contains bug fixes and improvements.
- Fixed a problem of click noise when selecting targets in KBD Ctrl Editor.